



SE05Q2BPDA

ESD Protection Diode

FEATURES


- Meet IEC61000-4-2 (ESD)±30kV (air),±30kV (contact)
- Bi-directional ESD protection
- Working Voltage : 5V
- Suffix "H" indicates Halogen-free parts, ex. SE05Q2BPDAH

APPLICATIONS

- Cell Phone Handsets and Accessories
- Notebooks, Desktops, and Servers
- PCI express, SATA, USB 2.0,DVI, Display port
- Portable Instrumentation

MECHANICAL DATA

Case : DFN1006(0402) mold package
 Terminal : Au/Sn plated, solderable per
 MIL-STD-750, method 2026

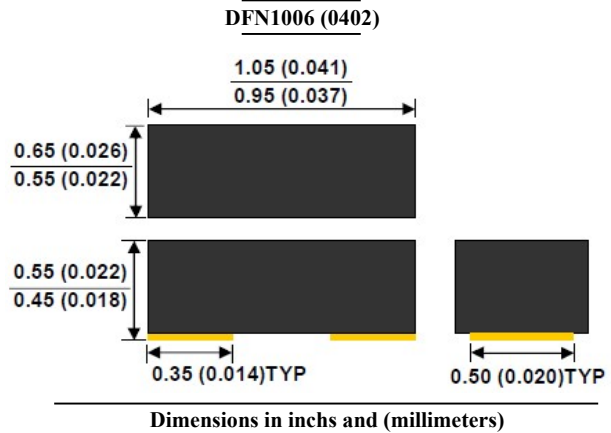

PIN CONFIGURATION



Maximum Ratings (Rating at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	Value	Units
Peak Pulse Power (tp=8/20μs waveform)	P _{PP}	138	W
Maximum Peak Pulse Current (tp=8/20μs waveform)	I _{PP}	7.9	A
ESD per IEC 61000-4-2 (Air)	V _{ESD}	±30	kV
ESD per IEC 61000-4-2 (Contact)		±30	
Operating Junction Temperature	T _J	125	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C



SE05Q2BPDA


ESD Protection Diode

Electrical Characteristics (Rating at 25°C ambient temperature unless otherwise specified)


Parameter	Symbol	Min	Typ.	Max	Units	
Reverse Stand-Off Voltage	V_{RWM}	-	-	5	V	
Reverse Breakdown Voltage	$V_{(BR)}$	-	-	8.5	V	
Reverse Leakage Current	I_R	-	-	50	nA	
Clamping Voltage	V_C	$I_{pp} = 1A, t_p = 8/20\mu s$	-	-	9	V
		$I_{pp} = 7.9A, t_p = 8/20\mu s$	-	-	17.5	V
Junction Capacitance	C_J	-	10	20	pF	

RATINGS AND CHARACTERISTIC CURVES


VBR - IB (25°C)

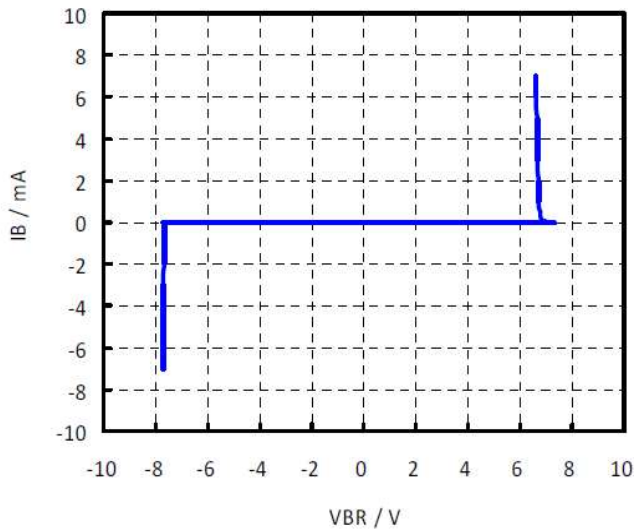


Cj--VR(25°C)

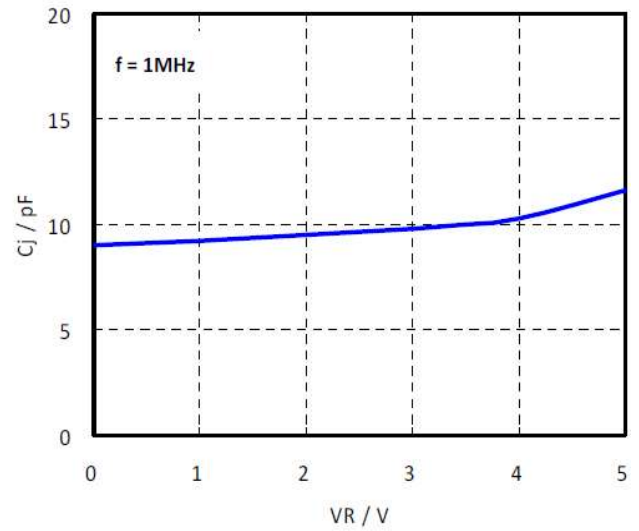

Vc - Ipp (25°C)

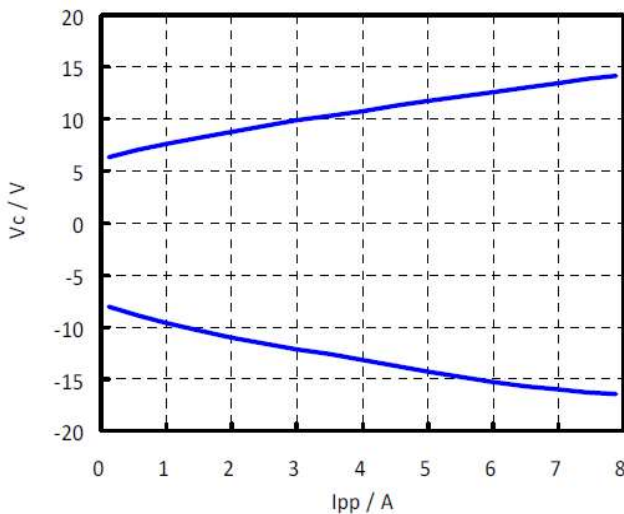

TLP Measurement

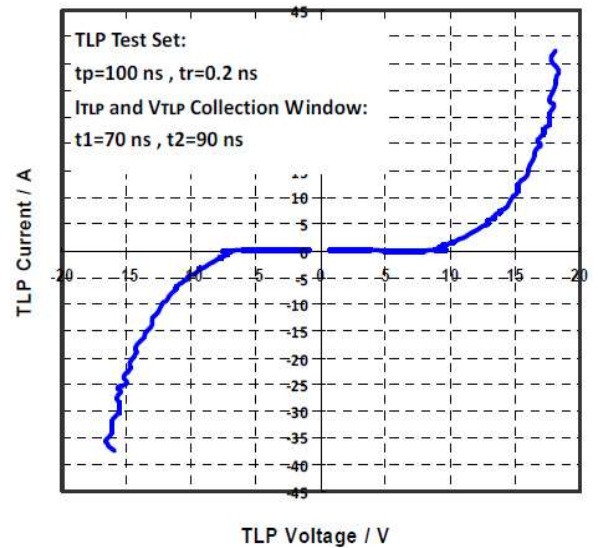




SE05Q2BPDA

ESD Protection Diode

TAPE & REEL SPECIFICATION

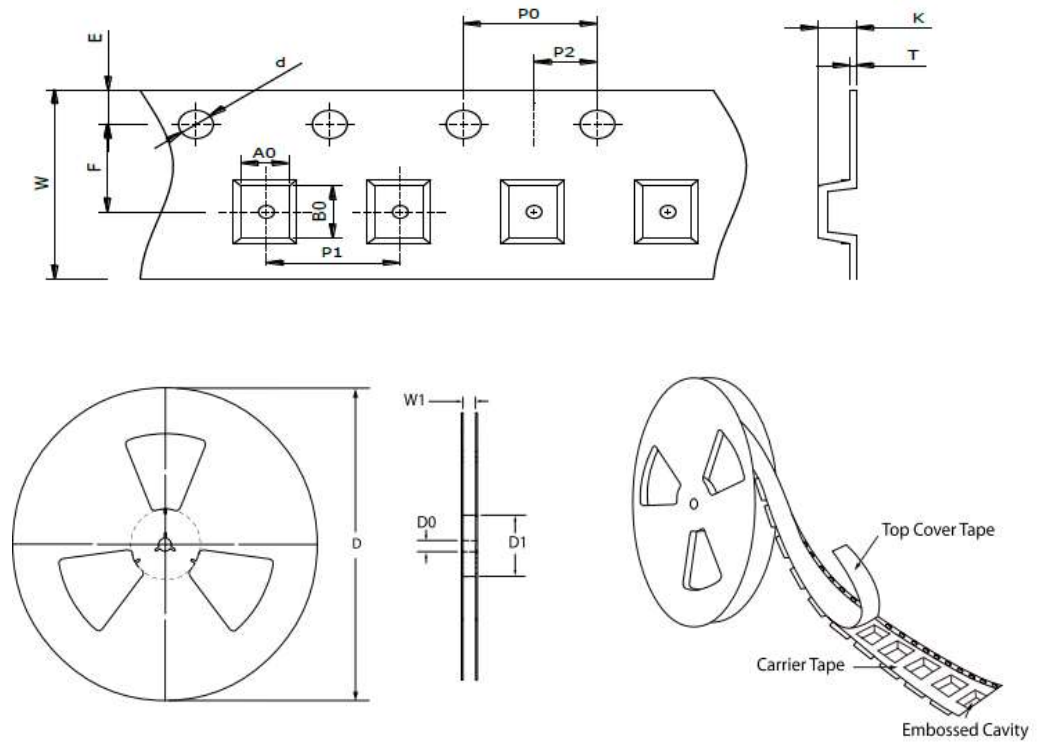

Item	Symbol	DFN1006 (0402)
Carrier width	A ₀	0.67 ± 0.10
Carrier length	B ₀	1.12 ± 0.10
Carrier depth	K	0.60 ± 0.10
Sprocket hole	d	1.50 ± 0.10
Reel outside diameter	D	178.00 ± 2.00
Feed hole width	D ₀	13.00 ± 0.20
Reel inner diameter	D ₁	MIN. 54.00
Sprocket hole position	E	1.75 ± 0.10
Punch hole position	F	3.50 ± 0.10
Sprocket hole pitch	P ₀	4.00 ± 0.10
Punch hole pitch	P ₁	4.00 ± 0.10
Embossment center	P ₂	2.00 ± 0.10
Overall tape thickness	T	0.22 ± 0.05
Tape width	W	8.00 ± 0.20
Reel width	W ₁	MAX. 13.50

ORDER INFORMATION


Package	Marking Code	Reel Size	Quantity
DFN1006 (0402)	E5	7"	5,000



SE05Q2BPDA

ESD Protection Diode

SUGGESTED SOLDER PAD LAYOUT

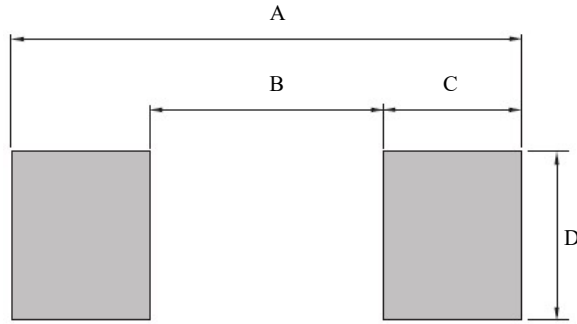

Unit : mm

PACKAGE	A	B	C	D
DFN1006 (0402)	1.30	0.30	0.50	0.70