

BA157 THRU BA159

FAST RECOVERY RECTIFIER

REVERSE VOLTAGE: 400 to 1000 VOLTS

FORWARD CURRENT: 1.0 AMPERE

FEATURES

- High surge current capability
- Void-free Plastic in a DO-41 package.
- Fast switching for high efficiency
- Exceeds environmental standards of MIL-S-19500/228
- Low leakage.
- Suffix "H" indicates Halogen-free parts, ex. BA157H

MECHANICAL DATA


Case : Molded plastic, DO-41

Epoxy : UL 94V-O rate flame retardant

Lead : Axial leads, solderable per MIL-STD-202,
method 208 guaranteed

Polarity : Color band denotes cathode end

Mounting position : Any

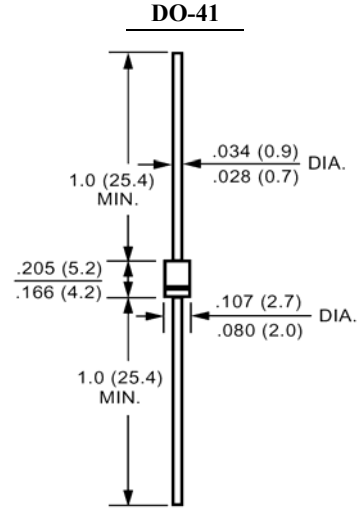

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbols	BA157	BA158	BA159	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	400	600	1000	Volts
Maximum RMS Voltage	V_{RMS}	280	420	700	Volts
Maximum DC Blocking Voltage	V_{DC}	400	600	1000	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length	$I_{(AV)}$	1.0			Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30.0			Amp
Maximum Forward Voltage at 1.0A DC and 25 °C	V_F	1.3			Volts
Maximum Reverse Current at $T_A=25^\circ C$ at Rated DC Blocking Voltage $T_A=100^\circ C$	I_R	5.0 150			μA
Typical Junction Capacitance (Note 1)	C_J	10			pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	65.0			°C/W
Maximum Reverse Recovery Time (Note 3)	T_{RR}	150		250	nS
Operating and Storage Temperature Range	T_J, T_{stg}	-65 to +150			°C

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance Junction to Ambient and from junction to lead at 0.375"(9.5mm) lead length P.C.B. Mounted.

3- Reverse Recovery Test Conditions: $I_F=5A$, $I_R=1A$, $I_{RR}=.25A$.

BA157 THRU BA159

FAST RECOVERY RECTIFIER



RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

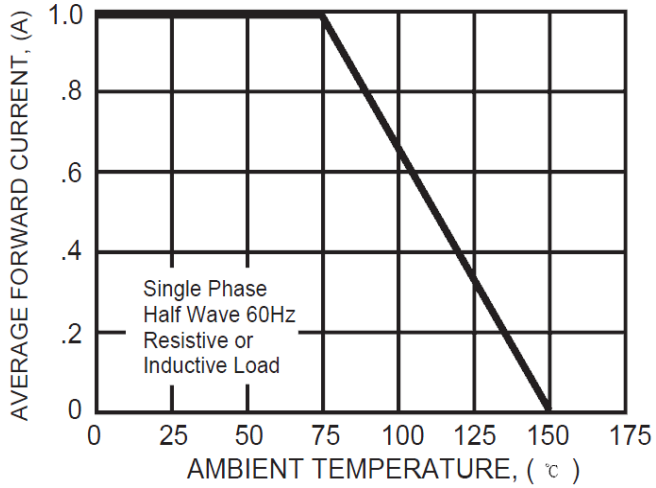


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

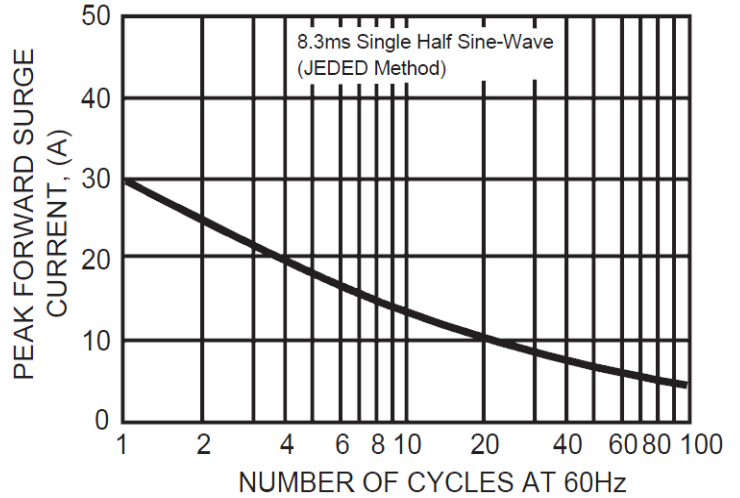


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

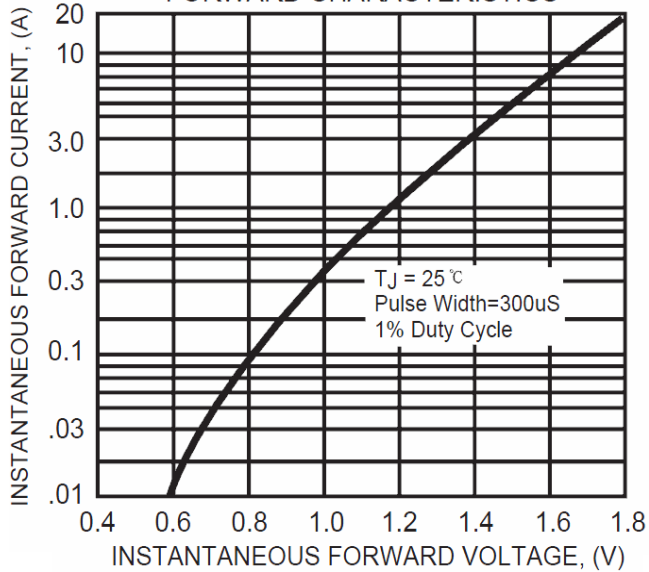


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

