



SR120 THRU SR1200

SCHOTTKY BARRIER RECTIFIER

REVERSE VOLTAGE: 20 to 200 VOLTS

FORWARD CURRENT: 1.0 AMPERE

FEATURES

- High current capability
- High surge current capability
- Low forward voltage drop
- Exceeds environmental standards of MIL-S-19500/228
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- Suffix "H" indicates Halogen-free parts, ex. SR120H.

MECHANICAL DATA


Case: Molded plastic, DO-41

Epoxy : UL 94V-O rate flame retardant

Lead : Axial leads, solderable per MIL-STD-202, method 208 guaranteed

Polarity : Color band denotes cathode end

Mounting position : Any

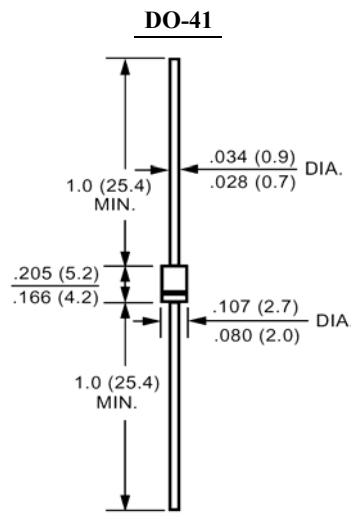

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbols	SR120	SR130	SR140	SR150	SR160	SR180	SR1100	SR1150	SR1200	Units
Maximum Recercent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	150	200	Volts
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	70	105	140	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	100	150	200	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length	$I_{(AV)}$	1.0									Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30.0									Amp
Maximum Forward Voltage at 1.0A DC and 25°C	V_F	0.55		0.70		0.85		0.95			Volts
Maximum Reverse Current at $T_A=25^\circ C$ at Rated DC Blocking Voltage $T_A=100^\circ C$	I_R	0.5									mAmp
		10			5.0						
Typical Junction Capacitance (Note 1)	C_J	110									pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	50.0									°C/W
Operating and Storage Temperature Range	T_J, T_{stg}	-65 to +125				-65 to +150					°C

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance Junction to Ambient and form junction to lead at 0.375"(9.5mm) lead length P.C.B. Mounted with 0.22x0.22" (5.5x5.5mm) copper pads



SR120 THRU SR1200

SCHOTTKY BARRIER RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

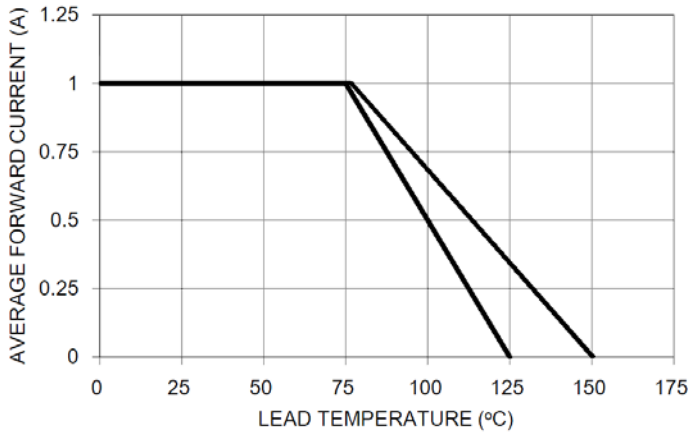


FIG. 1- FORWARD CURRENT DERATING CURVE

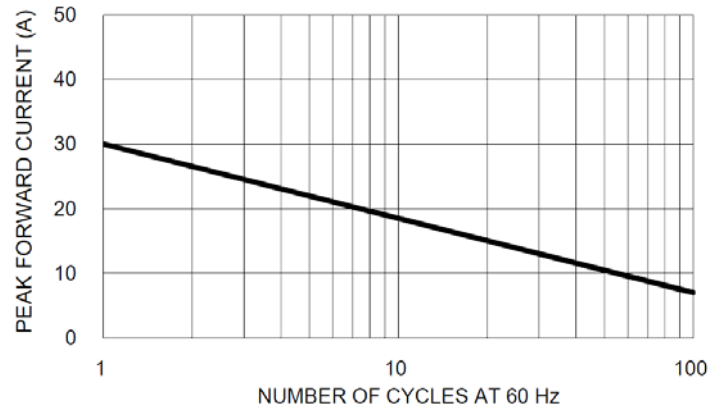


FIG. 2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

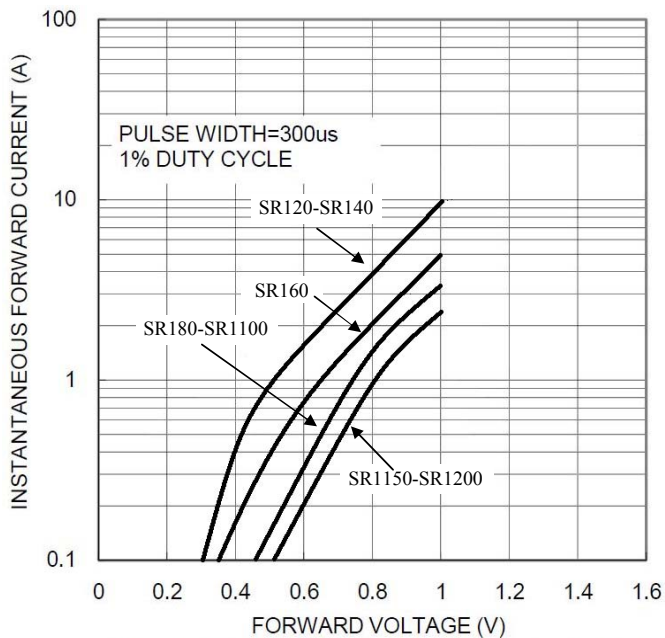


FIG. 3 TYPICAL FORWARD CHARACTERISTICS

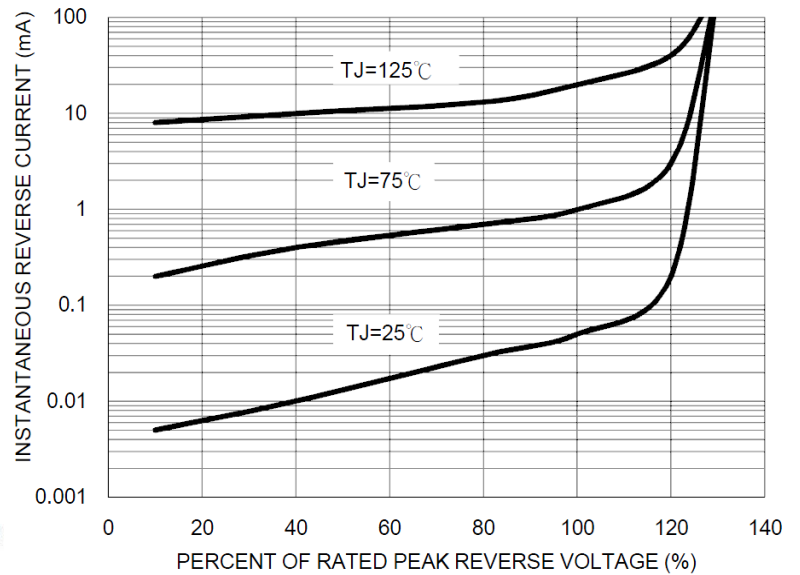


FIG. 4 TYPICAL REVERSE CHARACTERISTICS