



SR520 THRU SR5200

SCHOTTKY BARRIER RECTIFIER

REVERSE VOLTAGE: 20 to 200 VOLTS
FORWARD CURRENT: 5.0 AMPERE

FEATURES

- High current capability
- High surge current capability
- Low forward voltage drop
- Exceeds environmental standards of MIL-S-19500/228
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- Suffix "H" indicates Halogen-free parts, ex. SR520H.

MECHANICAL DATA


Case : Molded plastic, DO-201AD

Epoxy : UL 94V-O rate flame retardant

Lead : Axial leads, solderable per MIL-STD-202, method 208 guaranteed

Polarity : Color band denotes cathode end

Mounting position : Any

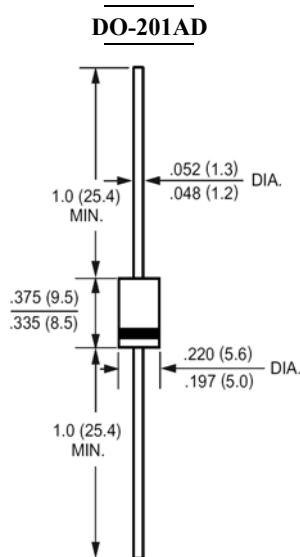

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbols	SR520	SR530	SR540	SR550	SR560	SR580	SR5100	SR5150	SR5200	Units						
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	150	200	Volts						
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	70	105	140	Volts						
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	100	150	200	Volts						
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length	I_(AV)	5.0								Amp							
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	100.0								Amp							
Maximum Forward Voltage at 5.0A DC and 25°C	V_F	0.55		0.70		0.85		0.95		Volts							
Maximum Reverse Current at T_A=25°C at Rated DC Blocking Voltage T_A=100°C	I_R	0.5 50								mAmp							
Typical Junction Capacitance (Note 1)	C_J	380								pF							
Typical Thermal Resistance (Note 2)	R_{θ JA}	25								°C/W							
Operating and Storage Temperature Range	T_J, T_{Stg}	-55 to +125			-55 to +150			°C									

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance Junction to Ambient and form junction to lead at 0.375"(9.5mm) lead length P.C.B. Mounted

SR520 THRU SR5200

SCHOTTKY BARRIER RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

FIG.1 FORWARD CURRENT DERATING CURVE

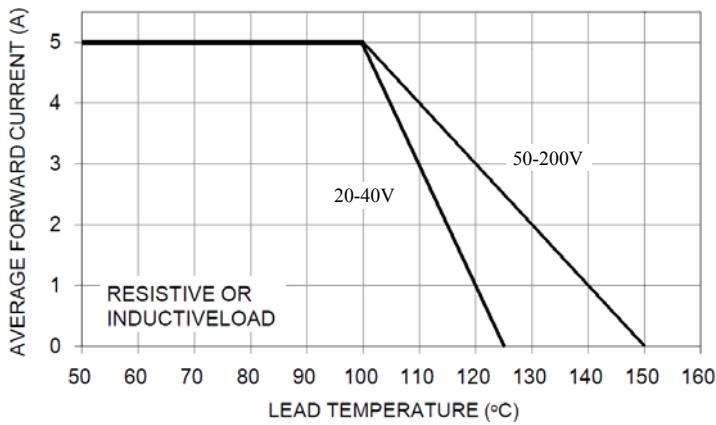


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

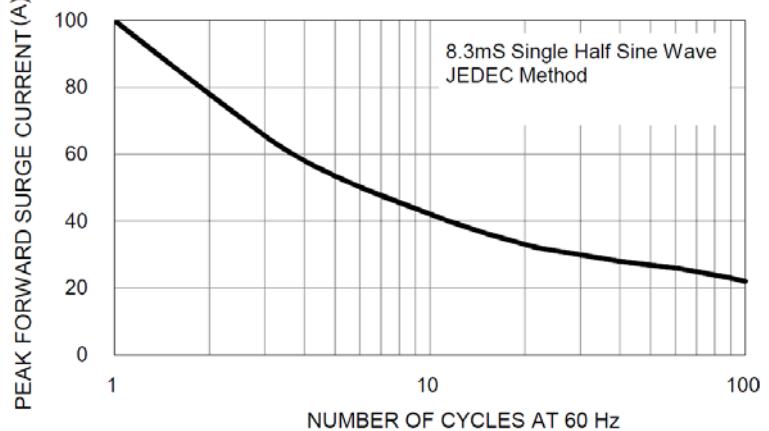


FIG. 3- TYPICAL FORWARD CHARACTERISTICS

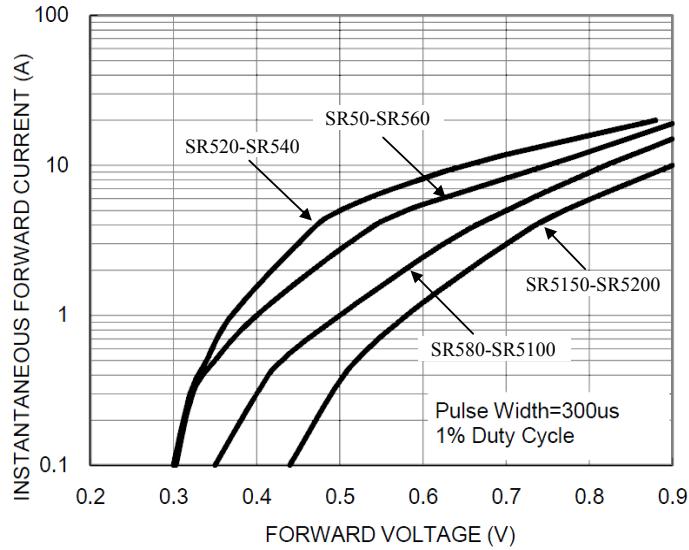


FIG. 4- TYPICAL REVERSE CHARACTERISTICS

