

SS24FL THRU SS210FL



康比電子
HORNBY ELECTRONIC

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

REVERSE VOLTAGE: 40 to 100 VOLTS

FORWARD CURRENT: 2.0 AMPERE

FEATURES

- Low profile surface mounted application in order to optimize board space.
- Low power loss, high efficiency.
- High current capability, low forward voltage drop.
- Ultra high-speed switching.
- Silicon epitaxial planar chip, metal silicon junction.
- Suffix "H" indicates Halogen-free parts, ex. SS24FLH


MECHANICAL DATA

Case : Molded plastic, SOD-123FL

Terminals: Solder plated, solderable per

MIL-STD-750, method 2026 guaranteed

Polarity : Color band denotes cathode end

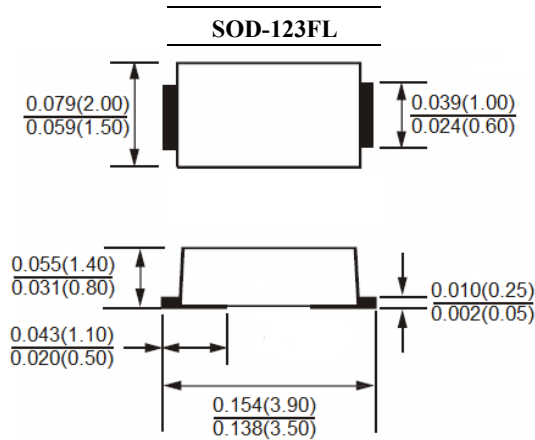

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbols	SS24FL	SS26FL	SS210FL	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	60	100	Volts
Maximum RMS Voltage	V_{RMS}	28	42	70	Volts
Maximum DC Blocking Voltage	V_R	40	60	100	Volts
Maximum Average Forward Rectified Current (See Fig. 1)	$I_{(AV)}$	2.0			Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	50.0			Amp
Maximum Forward Voltage at 2.0A $T_A=25^\circ\text{C}$	V_F	0.55	0.75	0.85	Volts
Maximum Reverse Current at $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A=100^\circ\text{C}$	I_R	0.5 20			mAmp
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	85.0			°C/W
Operating Junction Temperature Range	T_J	-55 to +125	-55 to +150		°C
Storage Temperature Range	T_{stg}	-55 to +150			

NOTES:

1- $f=1.0\text{MHz}$ and applied 4V DC reverse voltage

SS24FL THRU SS210FL

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER



康比電子
HORNBY ELECTRONIC

RATINGS AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

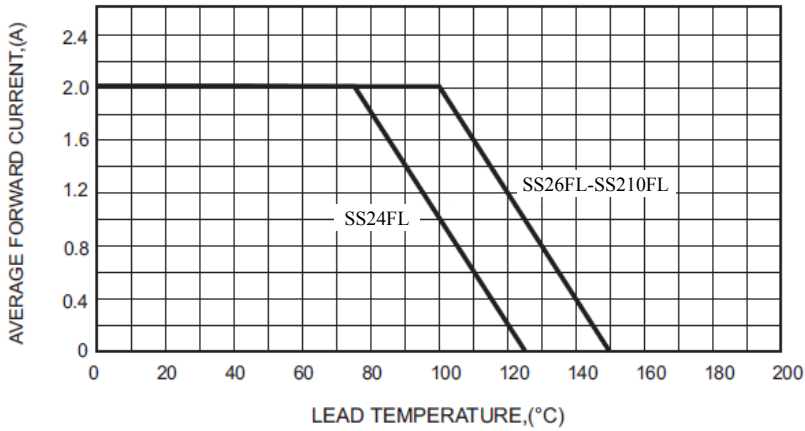


FIG.2-TYPICAL FORWARD CHARACTERISTICS

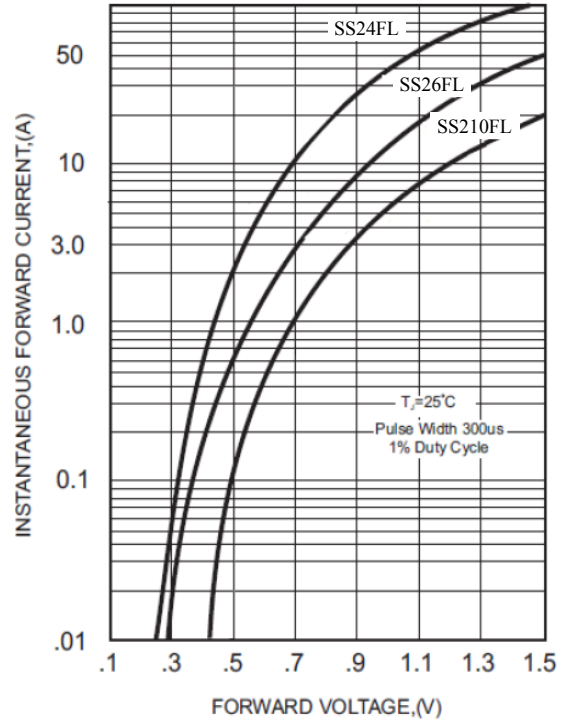


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

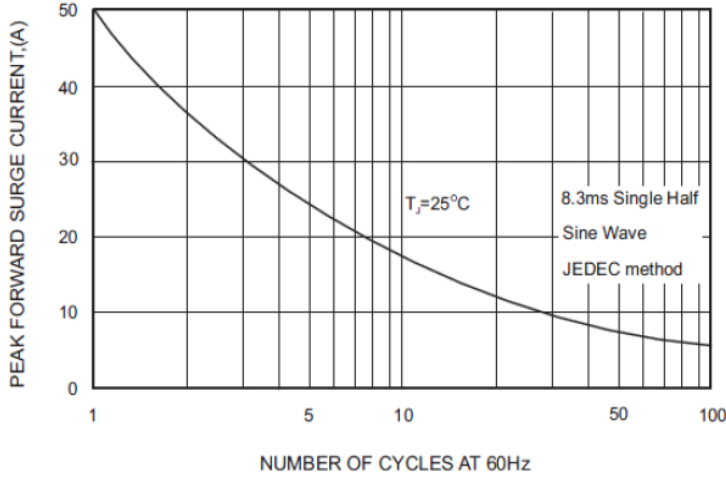


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

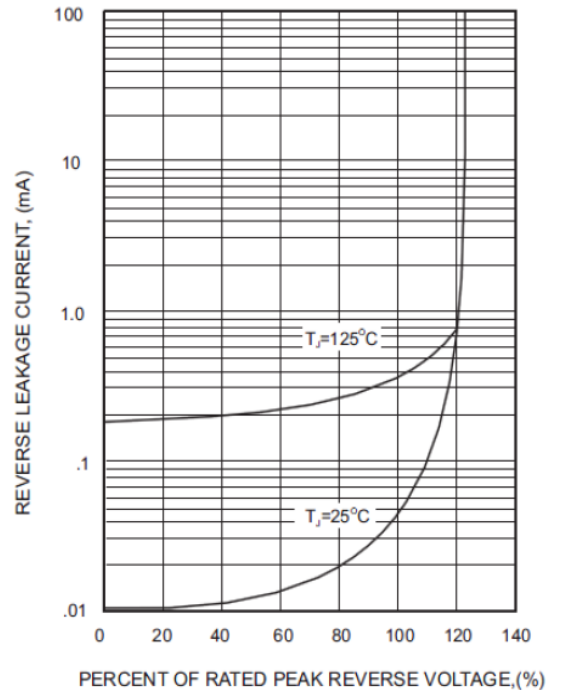


FIG.4-TYPICAL JUNCTION CAPACITANCE

