

1A1 THRU 1A7



康比電子
HORNBY ELECTRONIC

MINIATURE GENERAL PURPOSE PLASTIC SILICON RECTIFIER

REVERSE VOLTAGE: 50 to 1000 VOLTS

FORWARD CURRENT: 1.0 AMPERE

FEATURES

- Low forward voltage drop
- High current capability
- High capability
- High surge current capability
- Suffix "H" indicates Halogen-free parts, ex. 1A1H

MECHANICAL DATA


Case : Molded plastic, R-1

Epoxy : UL 94V-O rate flame retardant

Lead : Axial leads, solderable per MIL-STD-202,
method 208 guaranteed

Polarity : Color band denotes cathode end

Mounting position : Any

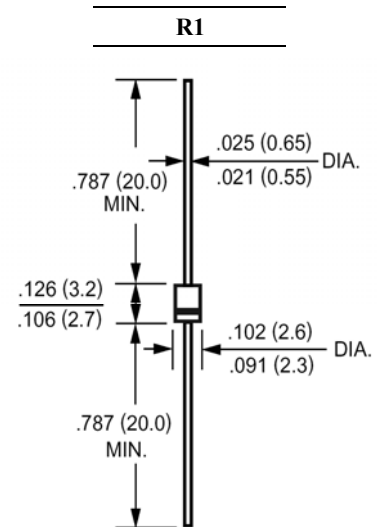

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbols	1A1	1A2	1A3	1A4	1A5	1A6	1A7	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at $T_A=25^\circ\text{C}$	$I_{(AV)}$	1.0							Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	25.0							Amp
Maximum Forward Voltage at 1.0A DC and 25 °C	V_F	1.1							Volts
Maximum Reverse Current at $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A=100^\circ\text{C}$	I_R	5.0 50							uAmp
Maximum Full Load Reverse Current Full Cycle Average at $T_L=75^\circ\text{C}$		100.0							uAmp
Typical Junction Capacitance (Note 1)	C_J	15							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	60.0							°C/W
Operating Junction Temperature Range	T_J	-55 to +150							°C
Storage Temperature Range	T_{STG}	-55 to +150							°C

NOTES:

1- Measured at 1.0 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance Junction to Ambient and from junction to lead at 0.375"(9.5mm) lead length P.C.B. Mounted.

1A1 THRU 1A7



康比電子
HORNBY ELECTRONIC

MINIATURE GENERAL PURPOSE PLASTIC SILICON RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

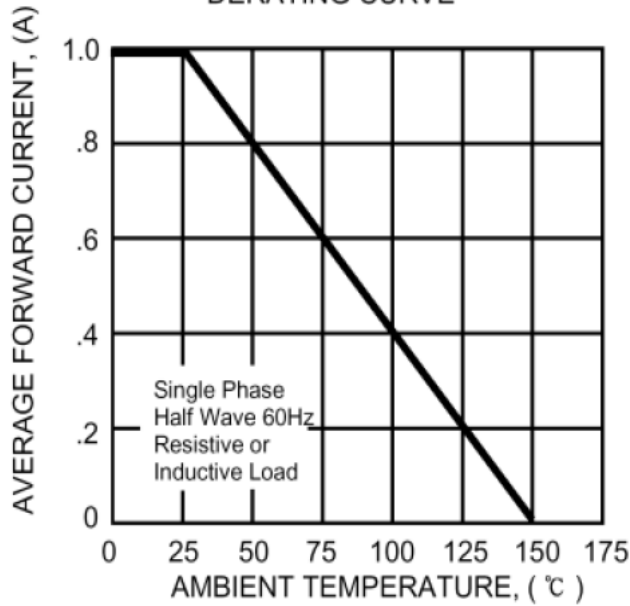


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

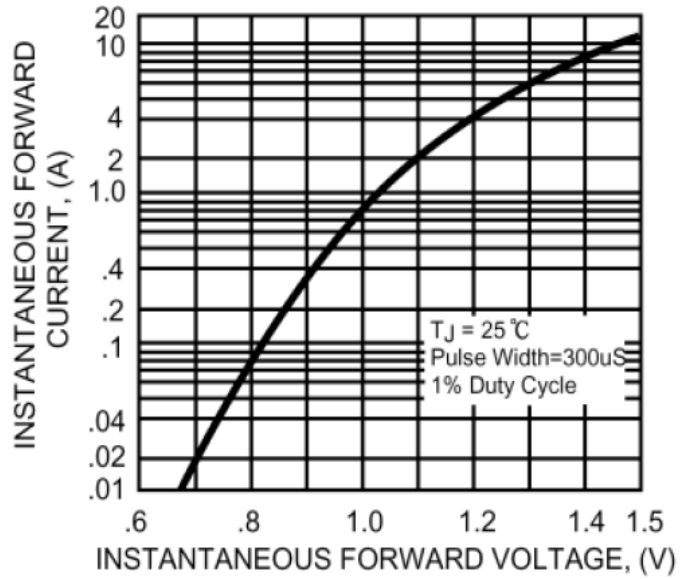


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

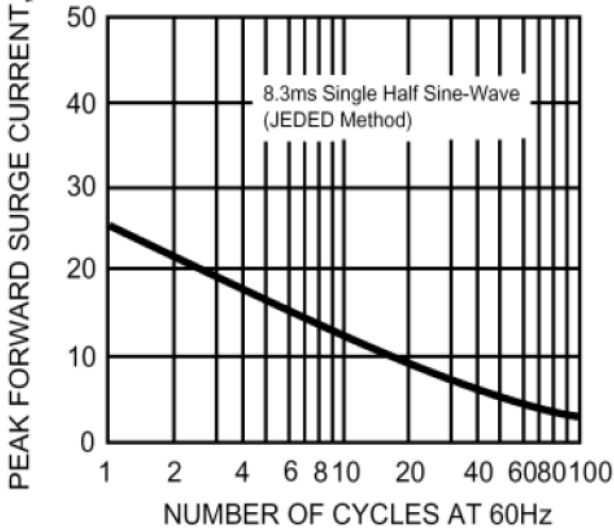


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

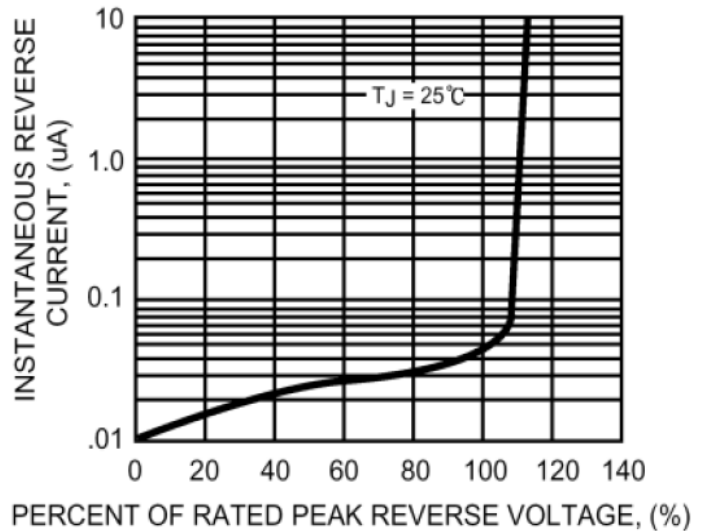


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

