
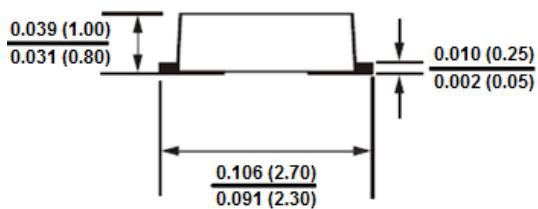


FEATURES

- Low Forward Voltage Drop
- Flat Lead SOD-323 Small Outline Plastic Package
- Surface Device Type Mounting
- Suffix "H" indicates Halogen-free parts, ex.B5819WSH

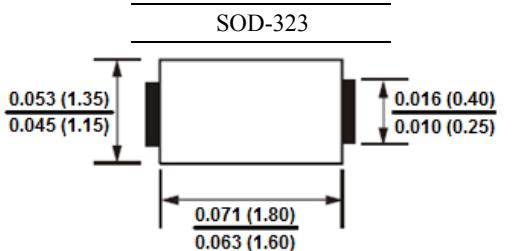

Dimensions in inch and (millimeters)

Maximum Ratings@ $T_A=25\text{ }^\circ\text{C}$

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	250	mW
Repetitive Peak Reverse Voltage	V _{RM}	40	V
Average Rectified Output Current	I _O	1	A
Peak Forward Surge Current (at 8.3ms single half sine-wave)	I _{FSM}	9	A
Operating Junction Temperature	T _J	+125	°C
Storage Temperature Range	T _{STG}	-55 to +125	°C

Electrical Characteristics@ $T_A=25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit	Conditions
Reverse Breakdown Voltage	V _{BR}	40	--	V	I _R =1mA
Reverse Leakage Current	I _R	--	1	mA	V _R =40V
Forward Voltage	V _F	--	0.6	V	I _F =1A
Diode Capacitance	C _d	30 (Typical)		pF	V _R =4V, f= 1MHz

Typical Characteristics

