
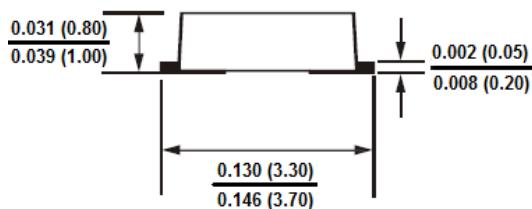


### FEATURES

- Low Forward Voltage Drop
- Flat Lead SOD-123 Small Outline Plastic Package
- Surface Device Type Mounting
- Suffix "H" indicates Halogen-free parts, ex. BAT42WH

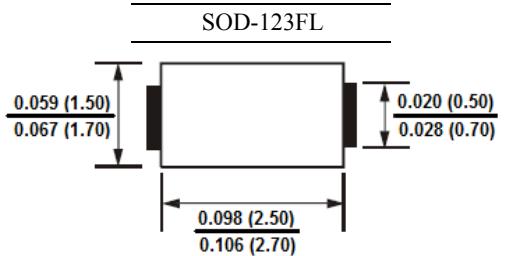

Dimensions in inch and (millimeters)

### Maximum Ratings@ $T_A=25\text{ }^\circ\text{C}$

Parameter	Symbol	Value	Unit
Power Dissipation	$P_D$	400	mW
Repetitive Peak Reverse Voltage	$V_{RRM}$	30	V
Maximum DC Blocking Voltage	$V_R$	30	V
Average Forward Current	$I_{F(AV)}$	200	mA
Peak Forward Surge Current	$I_{FSM}$	4	A
Operating Junction Temperature	$T_J$	+125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +125	$^\circ\text{C}$

### Electrical Characteristics@ $T_A=25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit	Test Conditions
Breakdown Voltage	$B_V$	30	--	V	$I_F=100\mu\text{A}$
Reverse Leakage Current	$I_R$	--	500	nA	$V_R=25\text{V}$
Forward Voltage	$V_F$	--	0.40		$I_F=10\text{mA}$
		--	0.65		$I_F=50\text{mA}$
		0.26	0.33	V	$I_F=2\text{mA}$
		--	0.45		$I_F=15\text{mA}$
		--	1.00		$I_F=200\text{mA}$
Reverse Recovery Time	$T_{RR}$	5 (Typical)		nS	$I_F=I_R=10\text{mA}, R_L=100\Omega$ $I_{RR}=1.0\text{mA}$
Capacitance	C	7 (Typical)		pF	$V_R=1.0\text{V}, f=1.0\text{MHz}$

### Typical Characteristics

