


RB520S-30

SCHOTTKY DIODES



FEATURES

- Low Forward Voltage Drop
- Flat Lead SOD-523 Small Outline Plastic Package
- Extremely Small SOD-523 Package
- Surface Device Type Mounting
- Suffix "H" indicates Halogen-free parts, ex. RB520S-30H

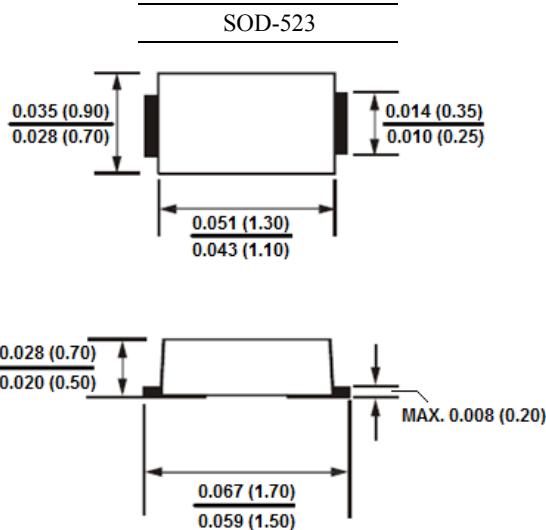

Dimensions in millimeters and (inch)

Maximum Ratings@ $T_A = 25^\circ C$

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	200	mW
Reverse Voltage	V _R	30	V
Average Forward Current	I _{F(AV)}	200	mA
Peak Forward Surge Current (At 8.3ms single half sine-wave)	I _{FSM}	1.0	A
Operating Junction Temperature	T _J	+125	°C
Storage Temperature Range	T _{STG}	-55 to +125	°C

Electrical Characteristics@ $T_A = 25^\circ C$

Parameter	Symbol	Min.	Max.	Unit	Conditions
Breakdown Voltage	B _V	30	--	V	I _R =500μA
Reverse Current	I _R	--	1	μA	V _R =10V
Forward Voltage	V _F	--	0.6	V	I _F =200mA

RB520S-30


SCHOTTKY DIODES




康比電子
HORNBY ELECTRONIC

Typical Characteristics

Total Capacitance

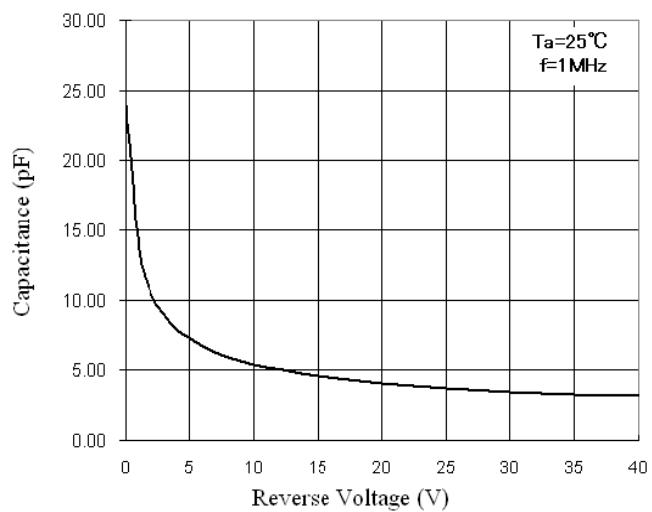

Forward Voltage vs Ambient Temperature

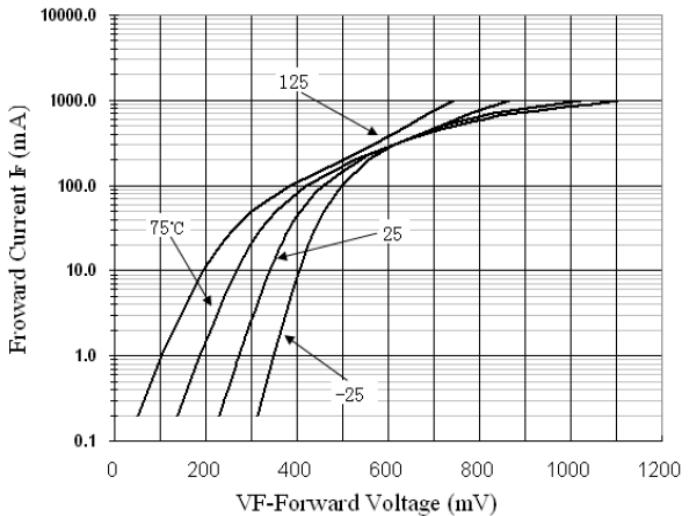

Reverse Current vs Reverse Voltage

