


### **FEATURES**

- Low Forward Voltage Drop
- Flat Lead SOD-523 Small Outline Plastic Package
- Extremely Small SOD-523 Package
- Surface Device Type Mounting
- Suffix "H" indicates Halogen-free parts, ex. RB520S-40H

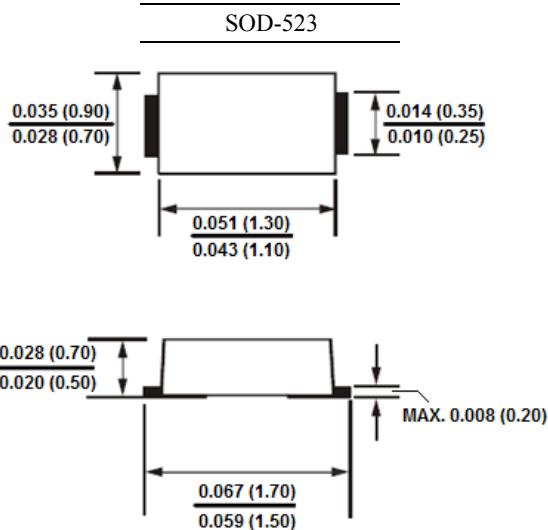

Dimensions in millimeters and (inch)

### **Maximum Ratings@ $T_A = 25\text{ }^\circ\text{C}$**

Parameter	Symbol	Value	Unit
Power Dissipation	P <sub>D</sub>	200	mW
Reverse Voltage	V <sub>R</sub>	40	V
Average Forward Current	I <sub>F(AV)</sub>	200	mA
Operating Junction Temperature	T <sub>J</sub>	+125	°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +125	°C

### **Electrical Characteristics@ $T_A = 25\text{ }^\circ\text{C}$**

Parameter	Symbol	Min.	Max.	Unit	Conditions
Breakdown Voltage	B <sub>V</sub>	40	--	V	I <sub>R</sub> =10μA
Reverse Current	I <sub>R</sub>	--	1	μA	V <sub>R</sub> =10V
Forward Voltage	V <sub>F</sub>	--	0.6	V	I <sub>F</sub> =200mA

### *Typical Characteristics*

