


# RB551V-30

## SCHOTTKY DIODES

### FEATURES

- Low Forward Voltage Drop
- Flat Lead SOD-323 Small Outline Plastic Package
- Surface Device Type Mounting
- Suffix "H" indicates Halogen-free parts, ex. RB551V-30H

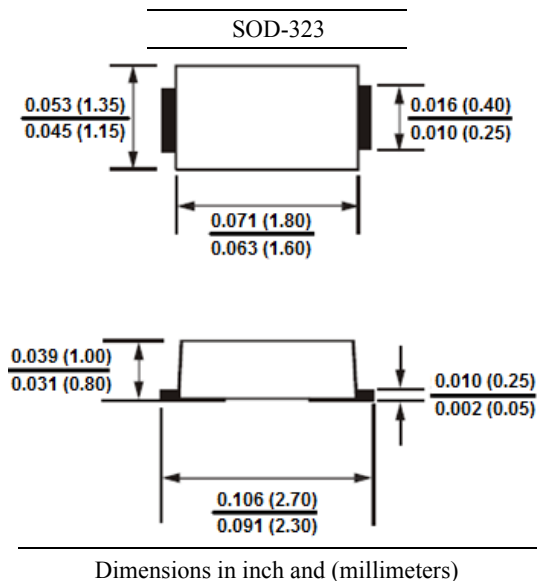

### Maximum Ratings@ $T_A = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Value	Unit
Power Dissipation	$P_D$	200	mW
Repetitive Peak Reverse Voltage	$V_{RM}$	30	V
Maximum DC Blocking Voltage	$V_R$	20	V
Average Forward Current	$I_{F(AV)}$	500	mA
Peak Forward Surge Current (8.3ms Single Half-wave)	$I_{FSM}$	5	A
Operating Junction Temperature	$T_J$	+125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 to +125	$^\circ\text{C}$

### Electrical Characteristics@ $T_A = 25\text{ }^\circ\text{C}$


Parameter	Symbol	Min.	Max.	Unit	Conditions
Breakdown Voltage	$B_V$	30	--	V	$I_R = 500\mu\text{A}$
Reverse Leakage Current	$I_R$	--	100	$\mu\text{A}$	$V_R = 20\text{V}$
Forward Voltage	$V_F$	--	0.36	V	$I_F = 100\text{mA}$
			0.47		$I_F = 500\text{mA}$

# RB551V-30


## SCHOTTKY DIODES

### Typical Characteristics

Forward Voltage vs Ambient Temperature

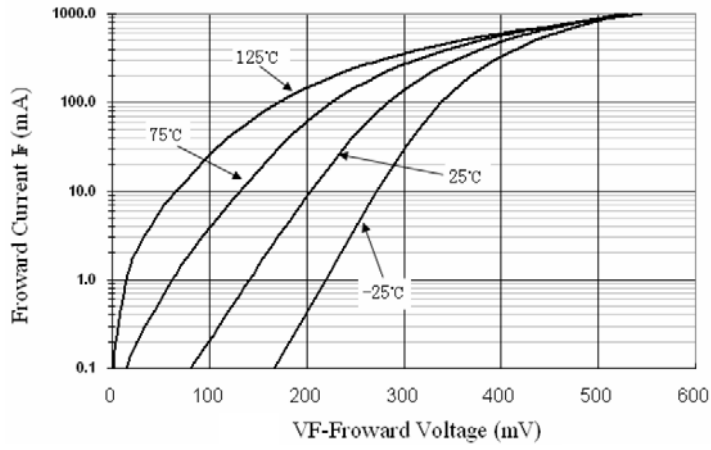

Total Capacitance

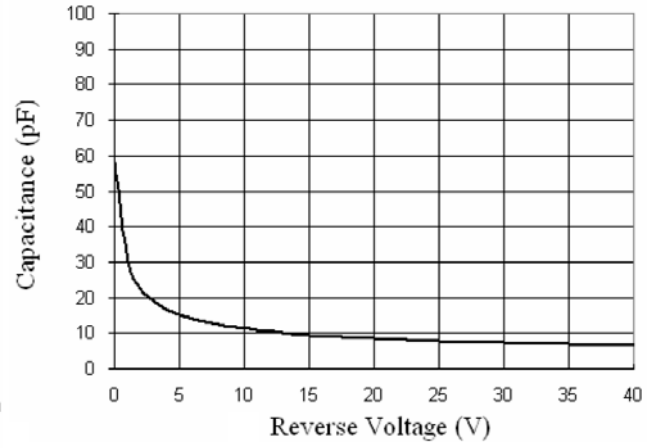

Reverse Current vs Reverse Voltage

