



UF5400 THRU UF5408

ULTRAFast RECOVERY RECTIFIER


REVERSE VOLTAGE: 50 to 1000 VOLTS
FORWARD CURRENT: 3.0 AMPERES

FEATURES

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Low cost
- Ultrafast recovery time for high efficiency
- Low forward voltage, high current capability
- Low leakage
- High surge capability
- Suffix "H" indicates Halogen-free parts, ex. UF5400H

MECHANICAL DATA

Case : Molded plastic, DO-201AD
 Terminals : Plated axial leads, solderable per MIL-STD-202, method 208 guaranteed
 Polarity : Color band denotes cathode end
 Mounting position : Any

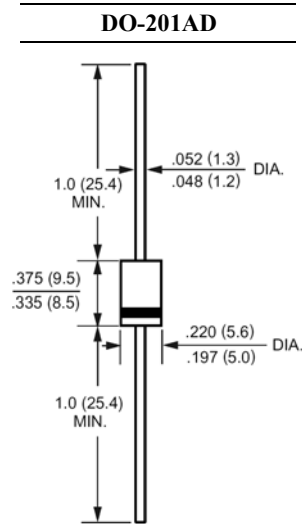

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

Parameter	Symbols	UF5400	UF5401	UF5402	UF5403	UF5404	UF5406	UF5407	UF5408	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	300	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	210	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	300	400	600	800	1000	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at $T_A=55^\circ\text{C}$	$I_{(AV)}$	3.0								Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	150.0								Amp
Maximum Forward Voltage at 3.0A DC and 25°C	V_F	1.1					1.7			Volts
Maximum Reverse Current at $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A=100^\circ\text{C}$	I_R	10.0					200			uAmp
Typical Junction Capacitance (Note 1)	C_J	80					50			pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	20.0								°C/W
Maximum Reverse Recovery Time (Note 3)	T_{RR}	50					75			nS
Operating and Storage Temperature Range	T_J, T_{stg}	-65 to +150								°C

NOTES:

- 1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- 2- Thermal Resistance Junction to Ambient and from junction to lead at 0.375"(9.5mm) lead length P.C.B. Mounted with 0.8x0.8" (20x20mm) copper pads.
- 3- Reverse Recovery Test Conditions: $I_F=5A$, $I_R=1A$, $I_{RR}=25A$.



UF5400 THRU UF5408

ULTRAFAST RECOVERY RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

FIG.1 TYPICAL FORWARD CURRENT DERATING CURVE

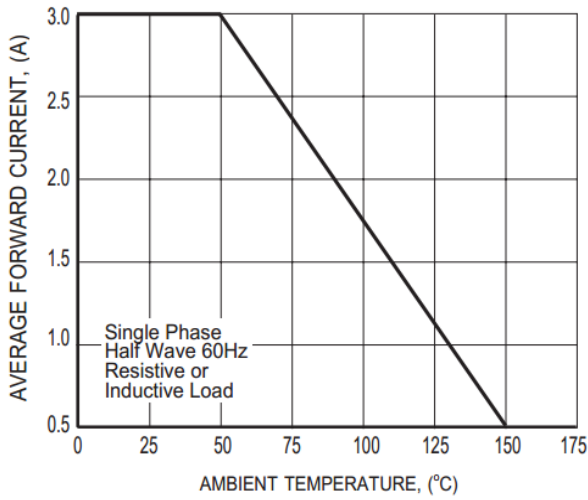


FIG.2 TYPICAL REVERSE CHARACTERISTICS

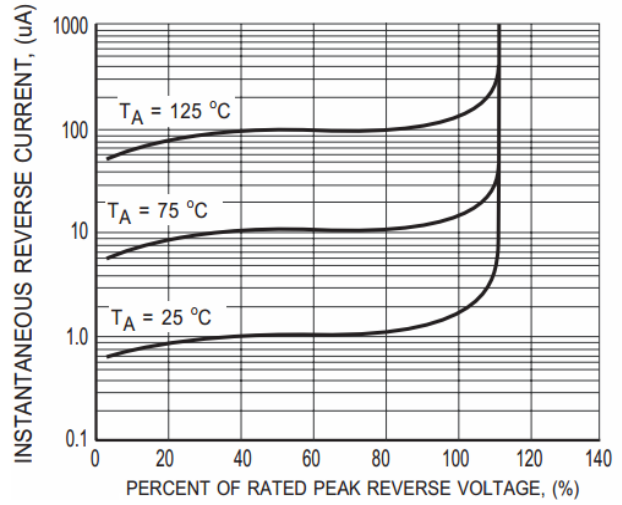


FIG.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

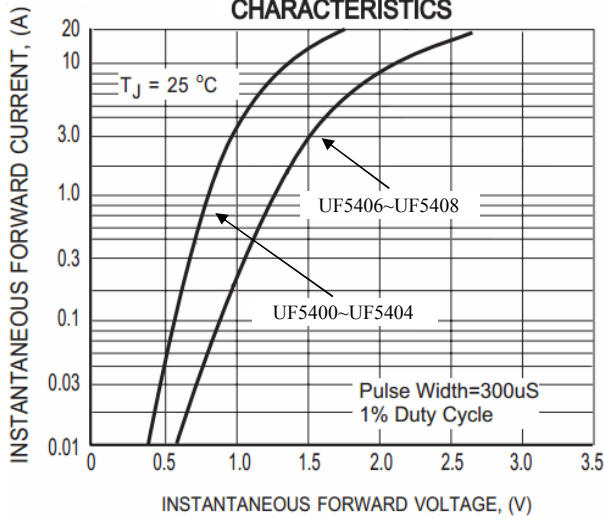


FIG.4 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

