



# US1AFL THRU US1MFL

## SURFACE MOUNT ULTRAFAST RECOVERY RECTIFIER

**REVERSE VOLTAGE:** 50 to 1000 VOLTS

**FORWARD CURRENT:** 1.0 AMPERE

### FEATURES


- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Easy pick and place
- Built-in strain relief
- Ultrafast recovery times for high efficiency
- Suffix "H" indicates Halogen-free parts, ex. US1AFLH

### MECHANICAL DATA

Case : Molded plastic, SOD-123FL

Terminals : Solder plated, solderable per MIL-STD-750, method 2026 guaranteed

Polarity : Color band denotes cathode end

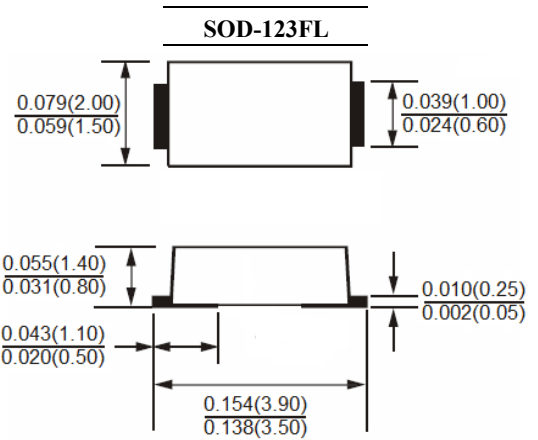

Dimensions in inchs and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbols	US1AFL	US1BFL	US1DFL	US1GFL	US1JFL	US1KFL	US1MFL	Units
Maximum Recerrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current	$I_{(AV)}$	1.0							Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	30							Amp
Maximum Forward Voltage at 1.0A	$V_F$	1.0			1.3	1.7			Volts
Maximum Reverse Current at $T_J=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_J=100^\circ\text{C}$	$I_R$					5.0			uAmp
Typical Junction Capacitance (Note 1)	$C_J$					15			pF
Typical Thermal Resistance (Note 2)	$R_{\theta JL}$					130			°C/W
Maximum Reverse Recovery Time (Note 3)	$T_{RR}$	50				75			nS
Operating Junction Temperature Range	$T_J$	-65 to +150							°C
Storage Temperature Range	$T_{stg}$	-65 to +150							°C

#### NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal resistance from junction to lead mounted on P.C.B. with 0.3 x 0.3" (8.0 x 8.0mm) copper pad areas

3- Reverse Recovery Test Conditions:  $I_F=0.5A$ ,  $I_R=1A$ ,  $I_{RR}=0.25A$ .



# US1AFL THRU US1MFL

## SURFACE MOUNT ULTRAFAST RECOVERY RECTIFIER

### RATINGS AND CHARACTERISTIC CURVES

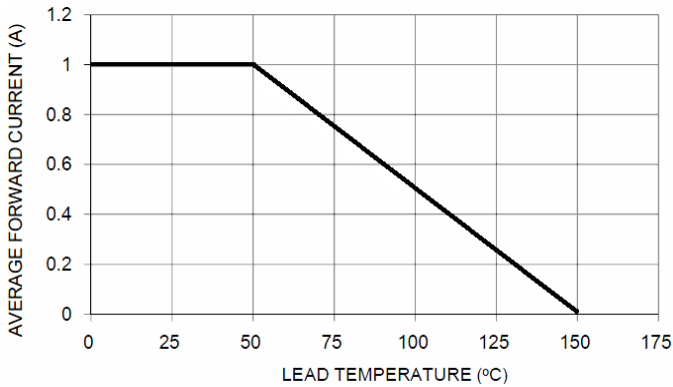


FIG. 1- MAXIMUM FORWARD CURRENT DERATING CURVE

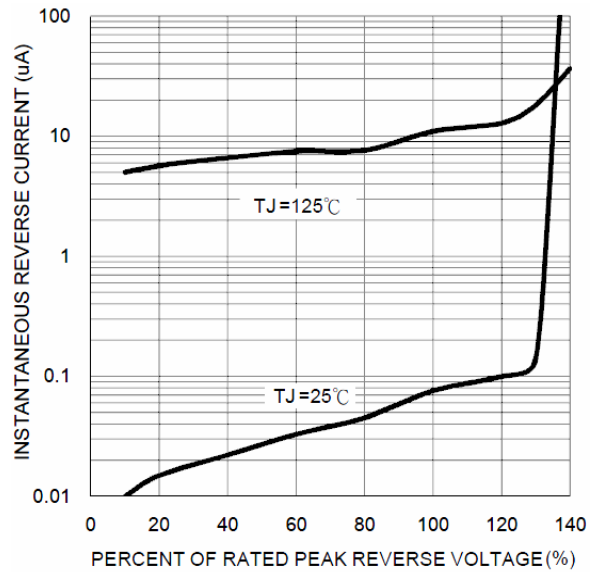


FIG. 2- TYPICAL REVERSE CHARACTERISTICS

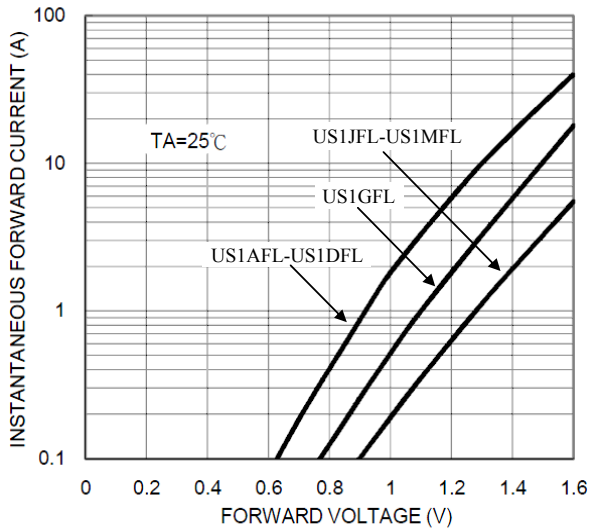


FIG. 3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

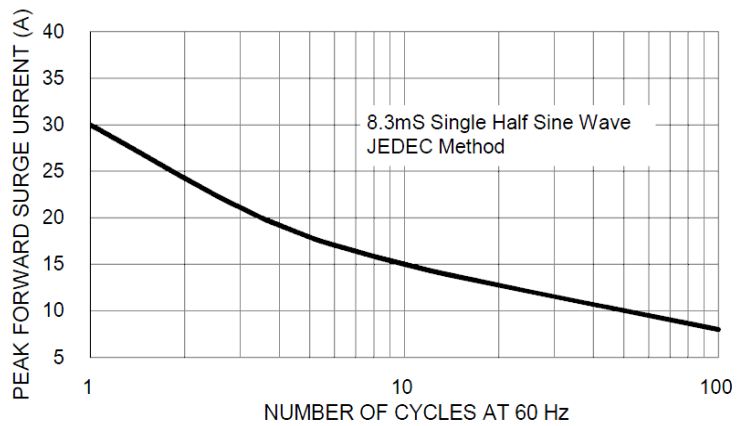


FIG. 4- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT