



1N5820 THRU 1N5822

SCHOTTKY BARRIER RECTIFIER

REVERSE VOLTAGE: 20 to 40 VOLTS
FORWARD CURRENT: 3.0 AMPERE


FEATURES

- High current capability
- 3.0 ampere operation at $T_L=95^\circ\text{C}$ with no thermal runaway.
- Exceeds environmental standards of MIL-S-19500/228
- For use in low voltage, high frequency inverters free wheeling, and porlarity protection applications
- Suffix "H" indicates Halogen-free parts, ex. 1N5820H.

MECHANICAL DATA

Case : Molded plastic, DO-201AD
 Epoxy : UL 94V-O rate flame retardant
 Lead : Axial leads, solderable per MIL-STD-202, method 208 guaranteed
 Polarity : Color band denotes cathode end
 Mounting position : Any

DO-201AD

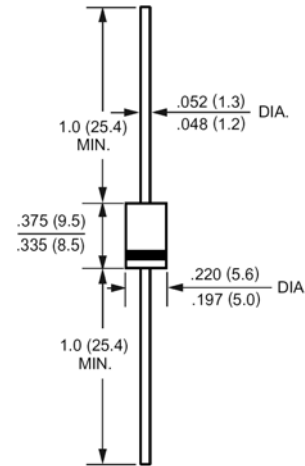

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

Parameter	Symbols	1N5820	1N5821	1N5822	Units
Maximum Recerrent Peak Reverse Voltage	V_{RRM}	20	30	40	Volts
Maximum RMS Voltage	V_{RMS}	14	21	28	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	40	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at $T_L=95^\circ\text{C}$	$I_{(AV)}$	3.0			Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	80.0			Amp
Maximum Forward Voltage at 3.0A DC	V_F	0.475	0.500	0.525	Volts
Maximum Forward Voltage at 9.4A DC		0.850	0.900	0.950	
Maximum Reverse Current at $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A=100^\circ\text{C}$	I_R	0.2 10			mAmp
Typical Junction Capacitance (Note 1)	C_J	250			pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	40.0			$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_J, T_{stg}	-55 to +150			$^\circ\text{C}$

NOTES:

- 1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- 2- Thermal Resistance Junction to Ambient and form junction to lead at 0.5"(12.7mm) lead length P.C.B. Mounted.



1N5820 THRU 1N5822

SCHOTTKY BARRIER RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

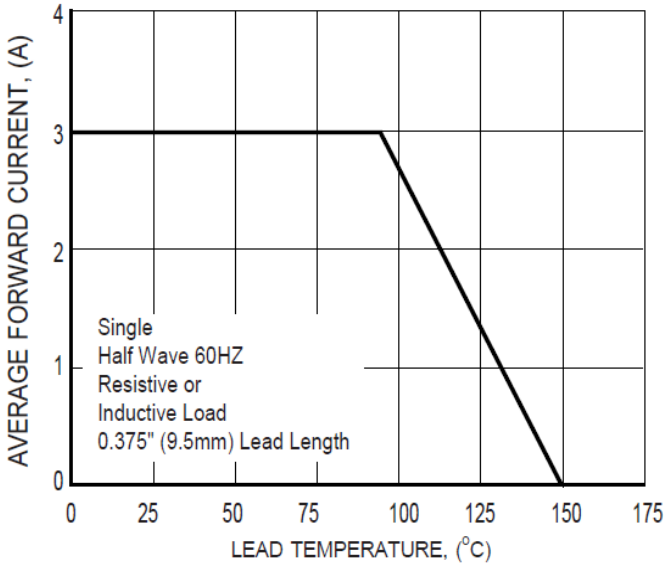


FIG.1 TYPICAL FORWARD CURRENT DERATING CURVE

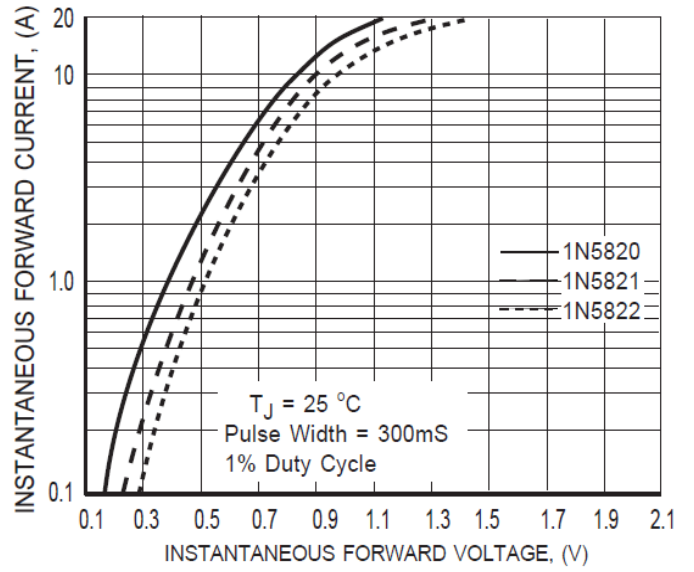


FIG.2 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

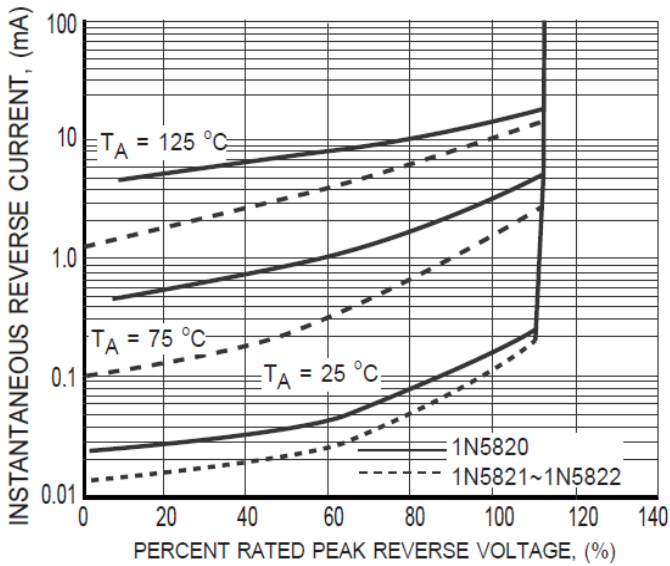


FIG.3 TYPICAL REVERSE CHARACTERISTICS

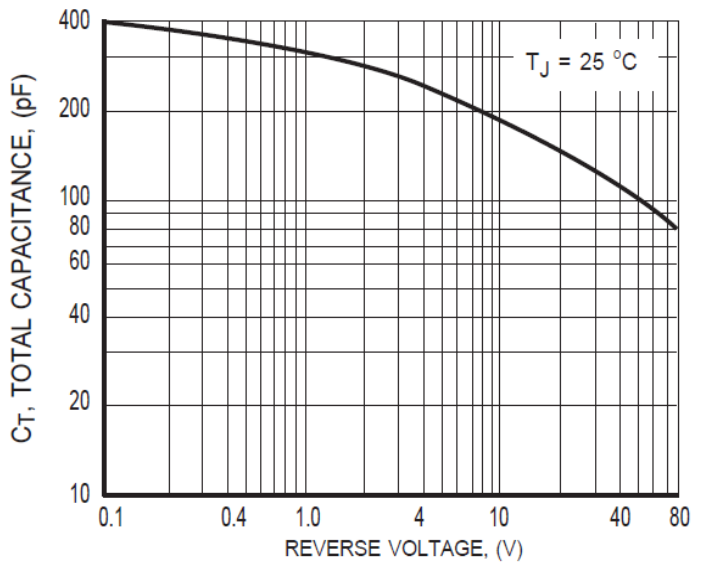


FIG.4 TYPICAL JUNCTION CAPACITANCE

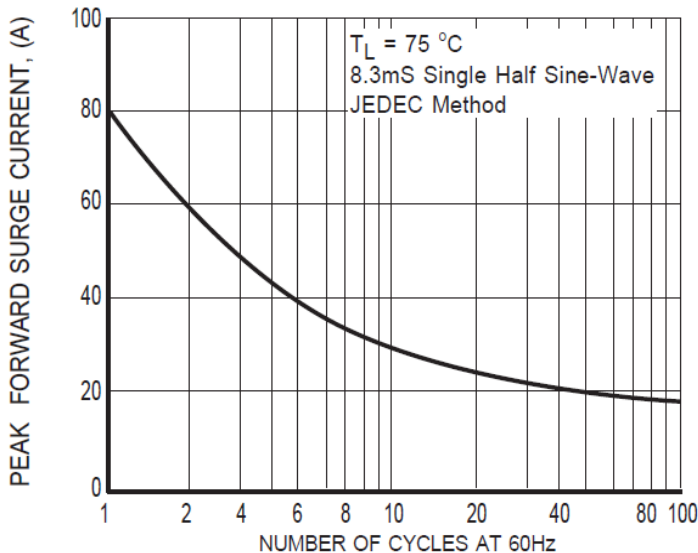


FIG.5 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT