




2SA1980YWH / GWH / LWH


PNP TRANSISTORS

FEATURES

- For switching and amplifier applications
- Suffix "H" indicates Halogen-free parts, ex. 2SA1980YWH

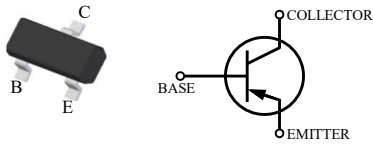

B	Base
C	Collector
E	Emitter

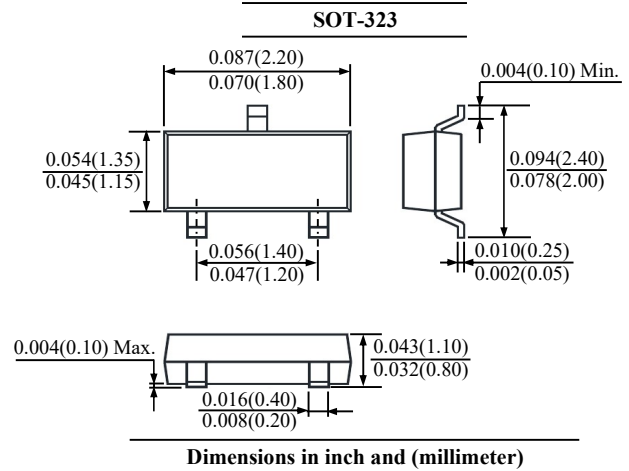

Maximum Ratings ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	-50	V
Collector Emitter Voltage	V_{CEO}	-50	V
Emitter Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-150	mA
Base Current	I_B	-50	mA
Power Dissipation	P_D	200	mW
Thermal Resistance from Junction to Ambient (Note 1)	$R_{\theta JA}$	625	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$

Note :

1. Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.

Electrical Characteristics ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified)

Parameter	Conditions	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain	$V_{CE} = -6\text{V}, I_C = -2\text{mA}$	Y	120	-	240	-
		G	200	-	400	-
		L	300	-	700	-
Collector Base Cutoff Current	$V_{CB} = -50\text{V}$	I_{CBO}	-	-	-100	nA
Emitter Base Cutoff Current	$V_{EB} = -5\text{V}$	I_{EBO}	-	-	-100	nA
Collector Base Breakdown Voltage	$I_C = -100\mu\text{A}$	$V_{(BR)CBO}$	-50	-	-	V
Collector Emitter Breakdown Voltage	$I_C = -1\text{mA}$	$V_{(BR)CEO}$	-50	-	-	V
Emitter Base Breakdown Voltage	$I_E = -10\mu\text{A}$	$V_{(BR)EBO}$	-5	-	-	V
Collector Emitter Saturation Voltage	$I_C = -100\text{mA}, I_B = -10\text{mA}$	$V_{CE(sat)}$	-	-	-0.30	V
Transition Frequency	$V_{CE} = -10\text{V}, I_C = -1\text{mA}$	f_T	80	-	-	MHz
Output Capacitance	$V_{CB} = -10\text{V}, f = 1\text{MHz}$	C_{ob}	-	-	7	pF



2SA1980YWH / GWH / LWH

PNP TRANSISTORS

RATINGS AND CHARACTERISTIC CURVES

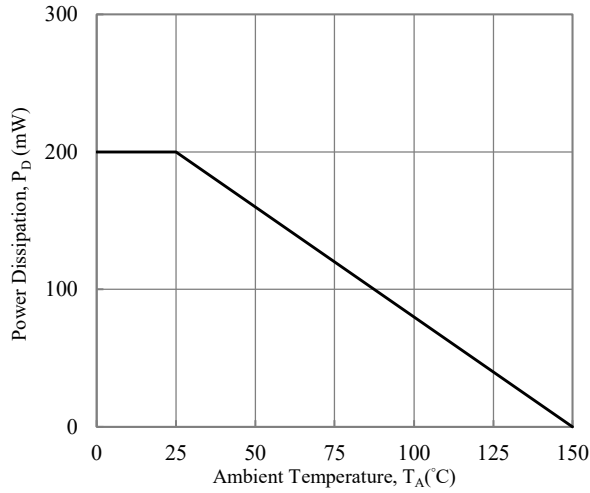


Fig. 1 Power Derating Curves

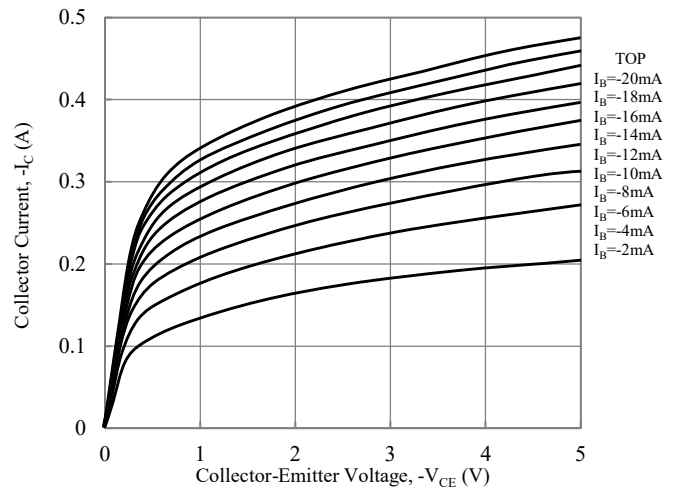


Fig. 2 Collector Current vs. Collector-Emitter Voltage

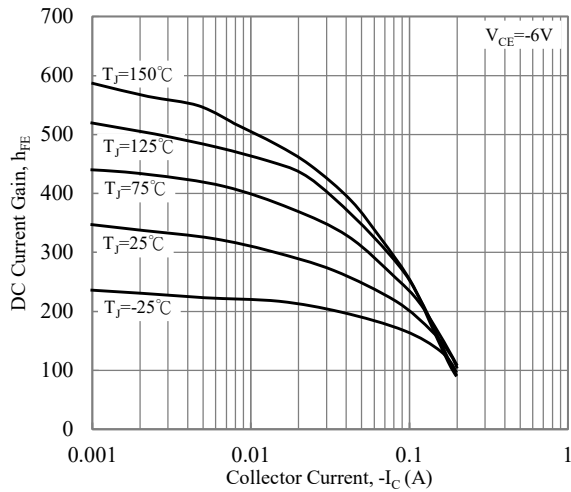


Fig. 3 Current Gain vs. Collector Current

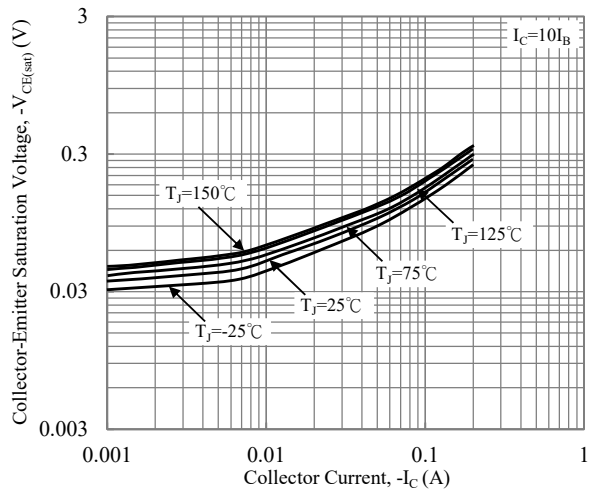


Fig. 4 Collector-Emitter Saturation Voltage vs. Collector Current

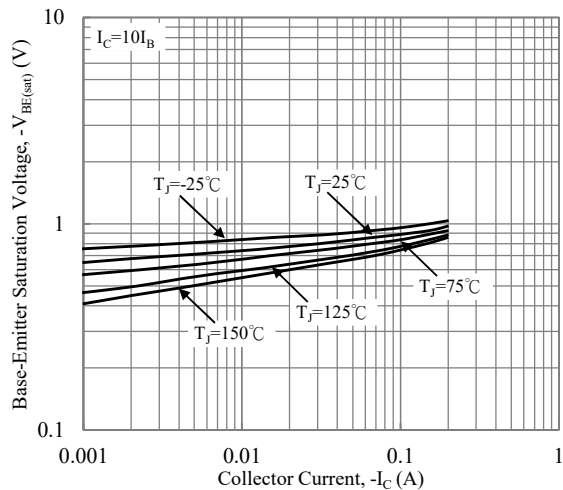


Fig. 5 Base-Emitter Saturation Voltage vs. Collector Current

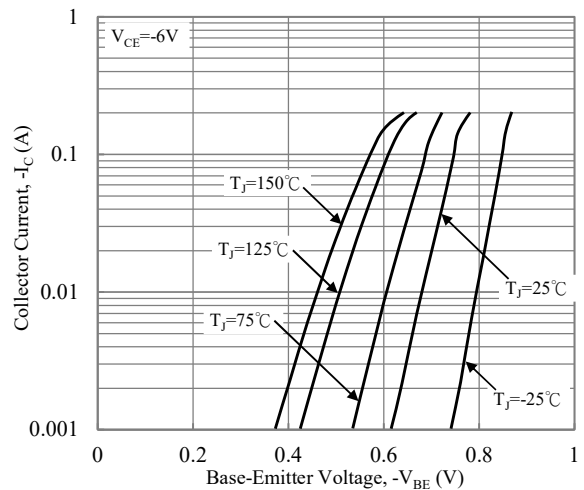


Fig. 6 Base-Emitter Voltage vs. Collector Current



2SA1980YWH / GWH / LWH

PNP TRANSISTORS

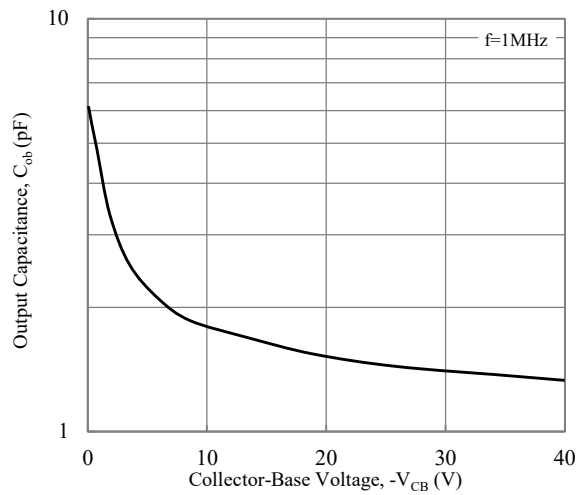



Fig. 7 Output Capacitance



2SA1980YWH / GWH / LWH

PNP TRANSISTORS

TAPE & REEL SPECIFICATION

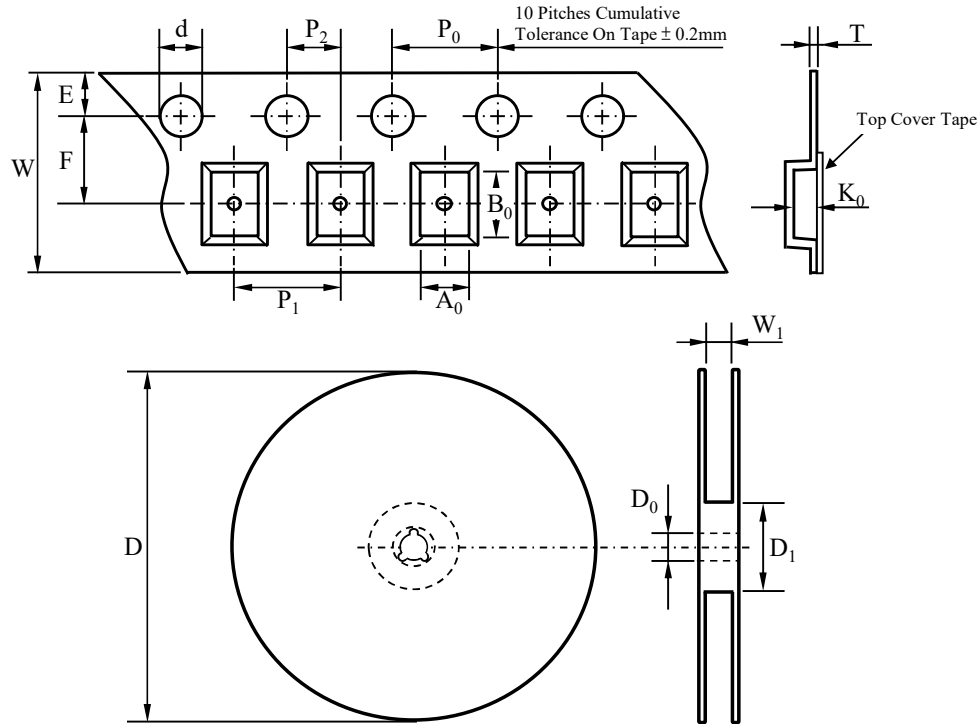

Item	Symbol	SOT-323
Carrier width	A_0	*
Carrier length	B_0	
Carrier depth	K_0	
Sprocket hole	d	1.50 ± 0.10
Reel outside diameter	D	178.00 ± 2.00
Feed hole width	D_0	13.00 ± 0.50
Reel inner diameter	D_1	MIN. 50.00
Sprocket hole position	E	1.75 ± 0.10
Punch hole position	F	3.50 ± 0.10
Sprocket hole pitch	P_0	4.00 ± 0.10
Punch hole pitch	P_1	4.00 ± 0.10
Embossment center	P_2	2.00 ± 0.10
Overall tape thickness	T	0.20 ± 0.05
Tape width	W	8.00 ± 0.20
Reel width	W_1	MAX. 14.50

Note *: A_0 , B_0 , and K_0 are determined by component size. The clearance between the components and the cavity must be within 0.05 mm min. to 0.5 mm max.

ORDER INFORMATION


Part Number	Marking Code	Reel Size	Quantity
2SA1980YWH	3E	7"	3,000
2SA1980GWH	3F		
2SA1980LWH	3G		



2SA1980YWH / GWH / LWH

PNP TRANSISTORS

SUGGESTED SOLDER PAD LAYOUT

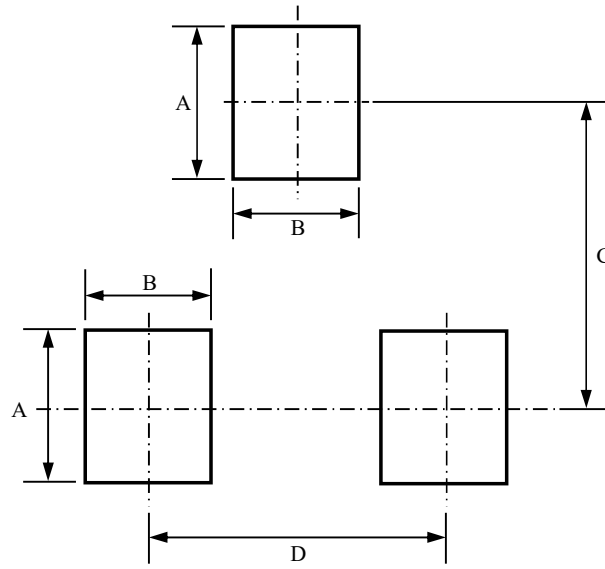

Unit :mm

PACKAGE	A	B	C	D
SOT-323	0.80	0.80	1.60	1.30