




B5819WSH

SCHOTTKY DIODE

FEATURES

- Low Forward Voltage Drop
- Flat Lead SOD-323 Small Outline Plastic Package
- Surface Device Type Mounting
- Suffix "H" indicates Halogen-free parts, ex.B5819WSH

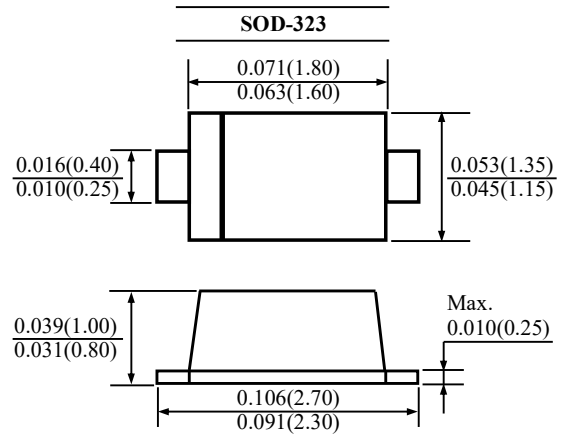

Dimensions in inch and (millimeter)

Maximum Ratings@ $T_A=25\text{ }^\circ\text{C}$

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	250	mW
Repetitive Peak Reverse Voltage	V_{RM}	40	V
Average Rectified Output Current	I_O	1	A
Peak Forward Surge Current (at 8.3ms single half sine-wave)	I_{FSM}	9	A
Operating Junction Temperature Range	T_J	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +125	$^\circ\text{C}$

Electrical Characteristics@ $T_A=25\text{ }^\circ\text{C}$

Parameter	Conditions	Symbol	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$I_R=1\text{mA}$	V_{BR}	40	-	-	V
Reverse Leakage Current	$V_R=40\text{V}$	I_R	-	-	1	mA
Forward Voltage	$I_F=1\text{A}$	V_F	-	-	0.6	V
Diode Capacitance	$V_R=4\text{V}$, $f=1\text{MHz}$	C_d	-	30	-	pF



B5819WSH

SCHOTTKY DIODE

RATINGS AND CHARACTERISTIC CURVES

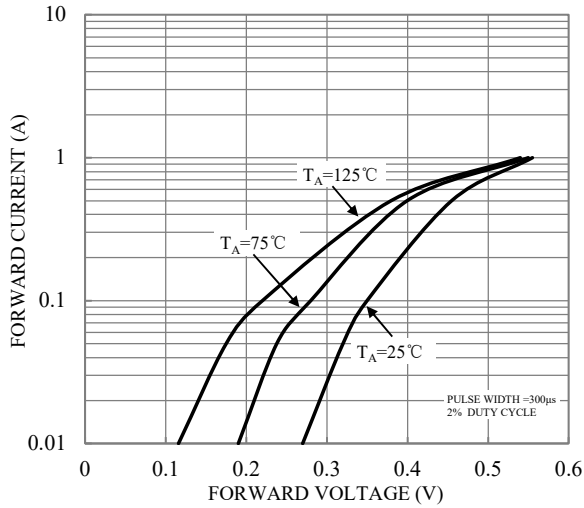


Fig.1-TYPICAL FORWARD CHARACTERISTICS

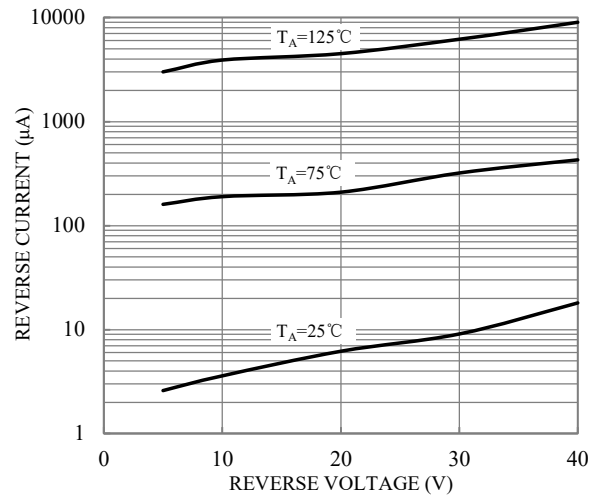


Fig.2-TYPICAL REVERSE CHARACTERISTICS

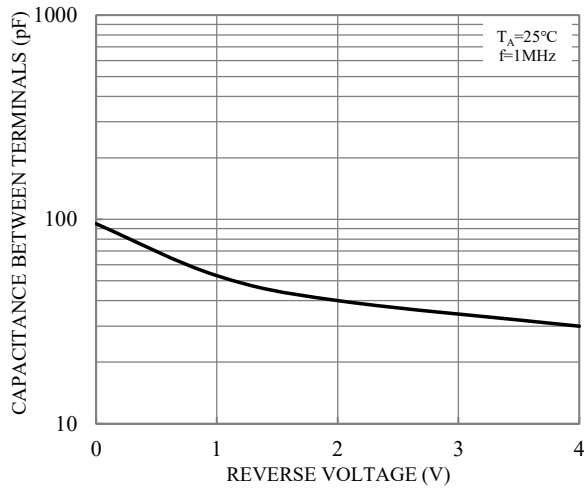



Fig.3-TOTAL CAPACITANCE



B5819WSH

SCHOTTKY DIODE

TAPE & REEL SPECIFICATION

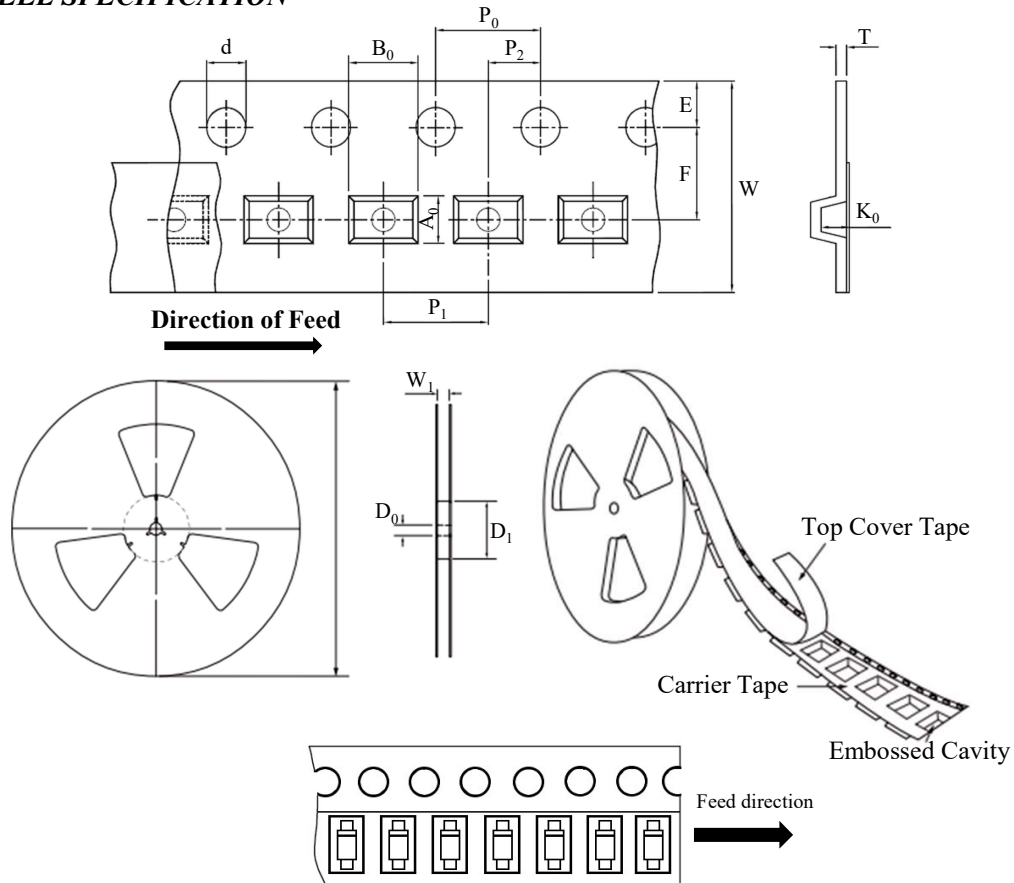

Item	Symbol	SOD-323
Carrier width	A_0	1.43 ± 0.10
Carrier length	B_0	2.95 ± 0.10
Carrier depth	K_0	1.20 ± 0.10
Sprocket hole	d	1.50 ± 0.10
Reel outside diameter	D	178.00 ± 2.00
Feed hole width	D_0	13.00 ± 0.50
Reel inner diameter	D_1	MIN. 50.00
Sprocket hole position	E	1.75 ± 0.10
Punch hole position	F	3.50 ± 0.10
Sprocket hole pitch	P_0	4.00 ± 0.10
Punch hole pitch	P_1	4.00 ± 0.10
Embossment center	P_2	2.00 ± 0.10
Overall tape thickness	T	0.25 ± 0.05
Tape width	W	8.00 ± 0.30
Reel width	W_1	MAX. 11.00

ORDER INFORMATION

Package	Reel Size	Quantity
SOD-323	7"	3,000

MARKING CODE


Part Number	Marking Code
B5819WSH	SL



B5819WSH

SCHOTTKY DIODE

SUGGESTED SOLDER PAD LAYOUT

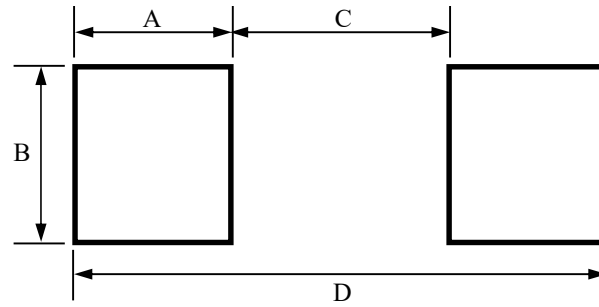

Unit :mm

PACKAGE	A	B	C	D
SOD-323	0.80	0.90	1.40	3.00