





# BAR43H / BAR43AH / BAR43CH / BAR43SH

## SCHOTTKY BARRIER DIODES

### FEATURES

· Suffix "H" indicates Halogen-free parts, ex. BAR43H.

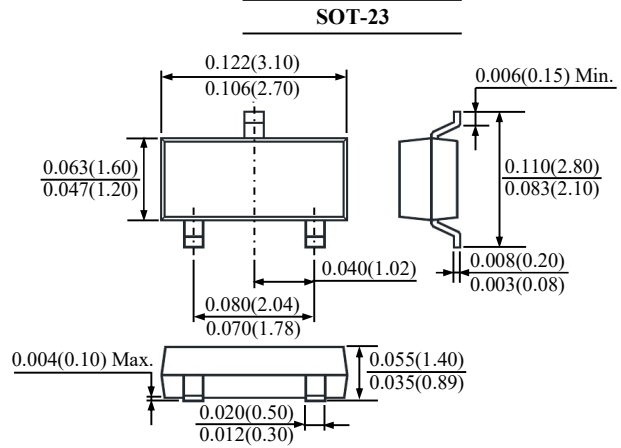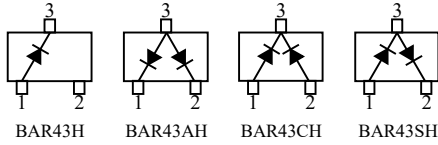

Dimensions in inch and (millimeter)

### Maximum Ratings ( $T_A=25\text{ }^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum Repetitive Reverse Voltage	$V_{RRM}$	30	V
Forward Current	$I_F$	200	mA
Non-Repetitive Peak Forward Surge Current at $t_p=1\text{ s}$	$I_{FSM}$	750	mA
Power Dissipation	$P_D$	290	mW
Thermal Resistance from Junction Ambient (Note 1)	$R_{\theta JA}$	345	$^\circ\text{C} / \text{W}$
Junction Temperature	$T_J$	125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +150	$^\circ\text{C}$

Note :

1. Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.

### Electrical Characteristics ( $T_A=25\text{ }^\circ\text{C}$ unless otherwise specified)


Parameter	Conditions	Symbol	Min	Max	Unit
Forward Voltage	$I_F=2\text{ mA}$	$V_F$	0.26	0.33	V
	$I_F=15\text{ mA}$		-	0.45	
	$I_F=100\text{ mA}$		-	0.80	
Reverse Breakdown Voltage	$I_R=100\text{ }\mu\text{A}$	$V_{BR(R)}$	30	-	V
Reverse Current	$V_R=25\text{ V}$	$I_R$	-	500	nA
Reverse Recovery time	$I_F=I_R=10\text{ mA}$ , $I_{RR}=1\text{ mA}$ , $R_L=1000\text{ }\Omega$	$t_{rr}$	-	5	ns




# BAR43H / BAR43AH / BAR43CH / BAR43SH

## SCHOTTKY BARRIER DIODES


### RATINGS AND CHARACTERISTIC CURVES

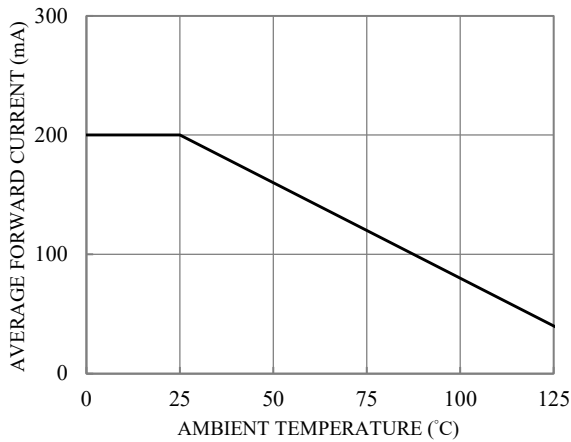


**Fig.1-FORWARD CURRENT DERATING CURVE**

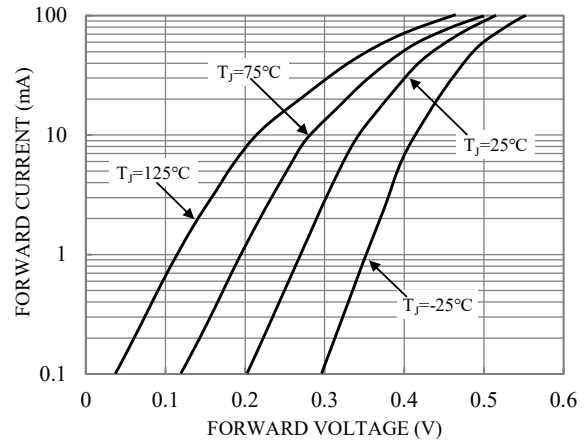

**Fig.2-FORWARD CHARACTERISTICS CURVE**

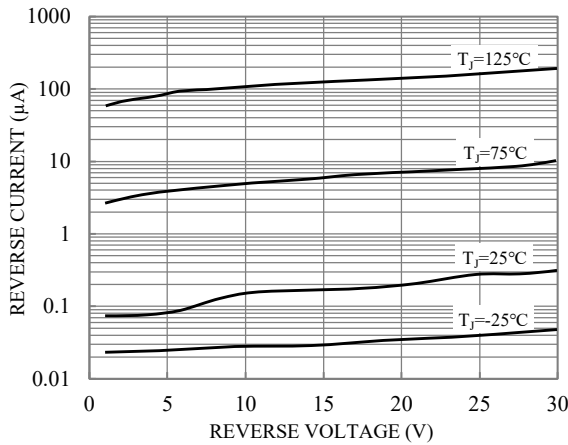

**Fig.3-REVERSE CHARACTERISTICS CURVE**

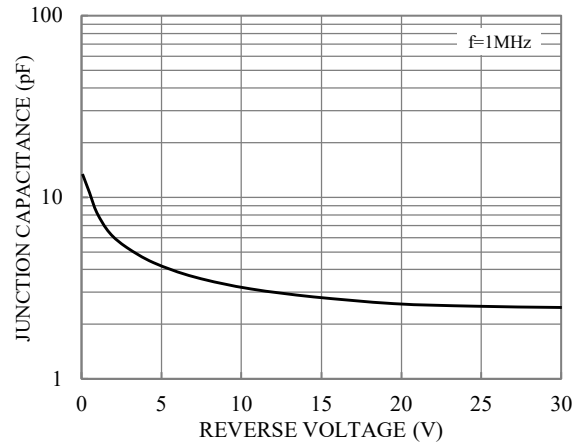


**Fig.4-JUNCTION CAPACITANCE**



# BAR43H / BAR43AH / BAR43CH / BAR43SH

## SCHOTTKY BARRIER DIODES

### TAPE & REEL SPECIFICATION

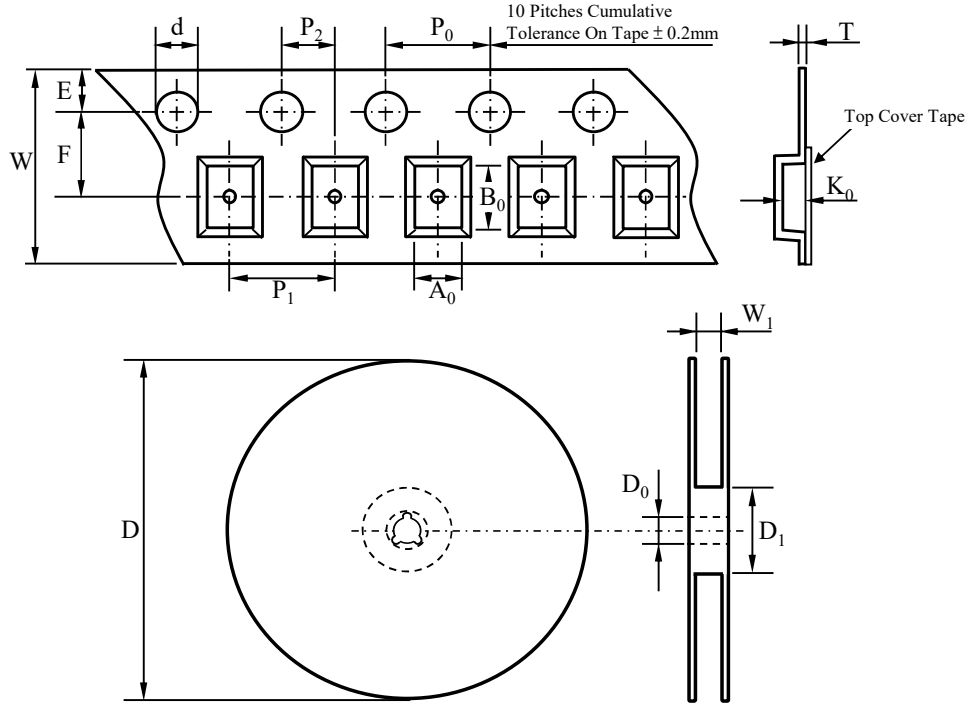

Item	Symbol	SOT-23
Carrier width	$A_0$	*
Carrier length	$B_0$	
Carrier depth	$K_0$	
Sprocket hole	$d$	$1.50 \pm 0.10$
Reel outside diameter	$D$	$178.00 \pm 2.00$
Feed hole width	$D_0$	$13.00 \pm 0.50$
Reel inner diameter	$D_1$	MIN. 50.00
Sprocket hole position	$E$	$1.75 \pm 0.10$
Punch hole position	$F$	$3.50 \pm 0.10$
Sprocket hole pitch	$P_0$	$4.00 \pm 0.10$
Punch hole pitch	$P_1$	$4.00 \pm 0.10$
Embossment center	$P_2$	$2.00 \pm 0.10$
Overall tape thickness	$T$	$0.20 \pm 0.05$
Tape width	$W$	$8.00 \pm 0.20$
Reel width	$W_1$	MAX. 14.50

Note \*:  $A_0$ ,  $B_0$ , and  $K_0$  are determined by component size. The clearance between the components and the cavity must be within 0.05 mm min. to 0.5 mm max.

### ORDER INFORMATION


Part Number	Marking Code	Reel Size	Quantity
BAR43H	RD	7"	3,000
BAR43AH	RE		
BAR43CH	RF		
BAR43SH	RH		



# BAR43H / BAR43AH / BAR43CH / BAR43SH

## SCHOTTKY BARRIER DIODES

### SUGGESTED SOLDER PAD LAYOUT

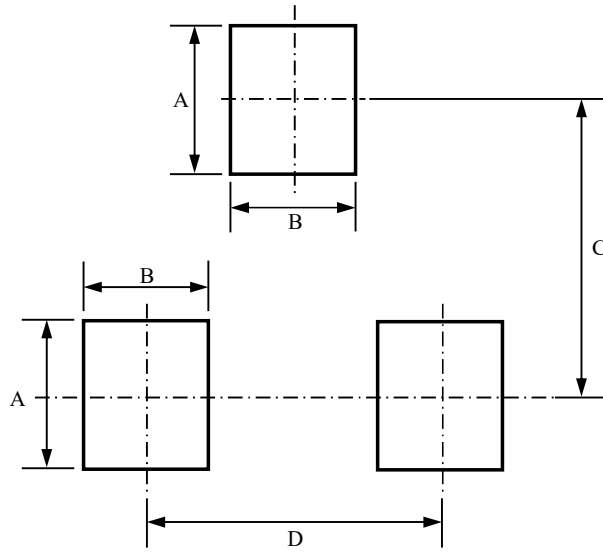

Unit :mm

PACKAGE	A	B	C	D
SOT-23	1.00	0.80	2.00	1.90