





RB720LPH

SCHOTTKY DIODES

FEATURES

· Suffix "H" indicates Halogen-free parts, ex. RB720LPH

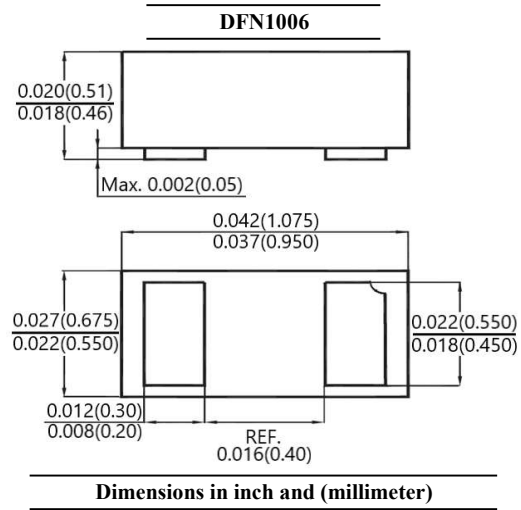

Maximum Ratings@ $T_A = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	30	V
Average Forward Current	$I_{F(AV)}$	200	mA
Non-Repetitive Peak Forward Surge Current (8.3 ms)	I_{FSM}	1	A
Operating Junction Temperature	T_J	125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-40 to +125	$^\circ\text{C}$

Electrical Characteristics@ $T_A = 25\text{ }^\circ\text{C}$

Parameter	Conditions	Symbol	Typ.	Max.	Unit
Forward Voltage	$I_F = 200\text{ mA}$	V_F	-	0.50	V
Reverse Current	$V_R = 10\text{ V}$	I_R	-	30	μA



RB720LPH

SCHOTTKY DIODES

RATINGS AND CHARACTERISTIC CURVES

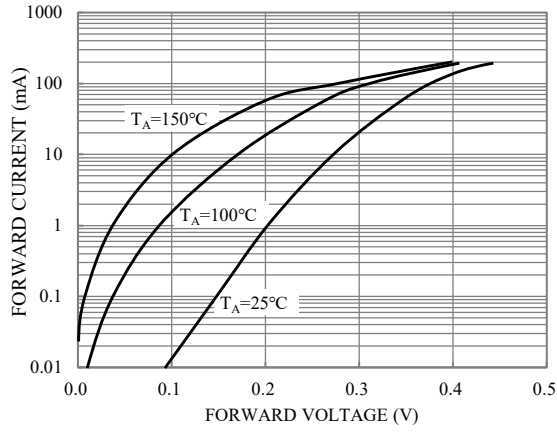


Fig.1-TYPICAL FORWARD CHARACTERISTICS

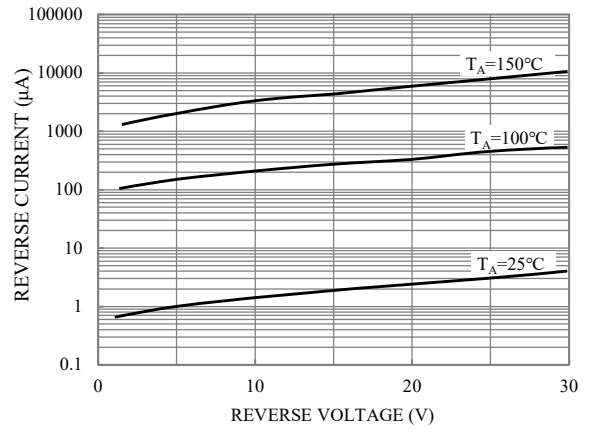


Fig.2-TYPICAL REVERSE CHARACTERISTICS

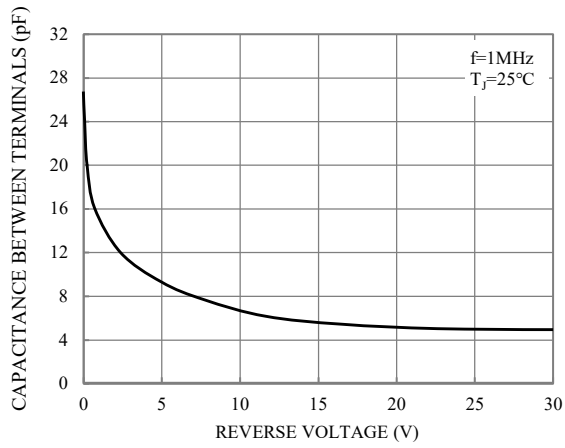



Fig.3-CAPACITANCE



RB720LPH

SCHOTTKY DIODES

TAPE & REEL SPECIFICATION

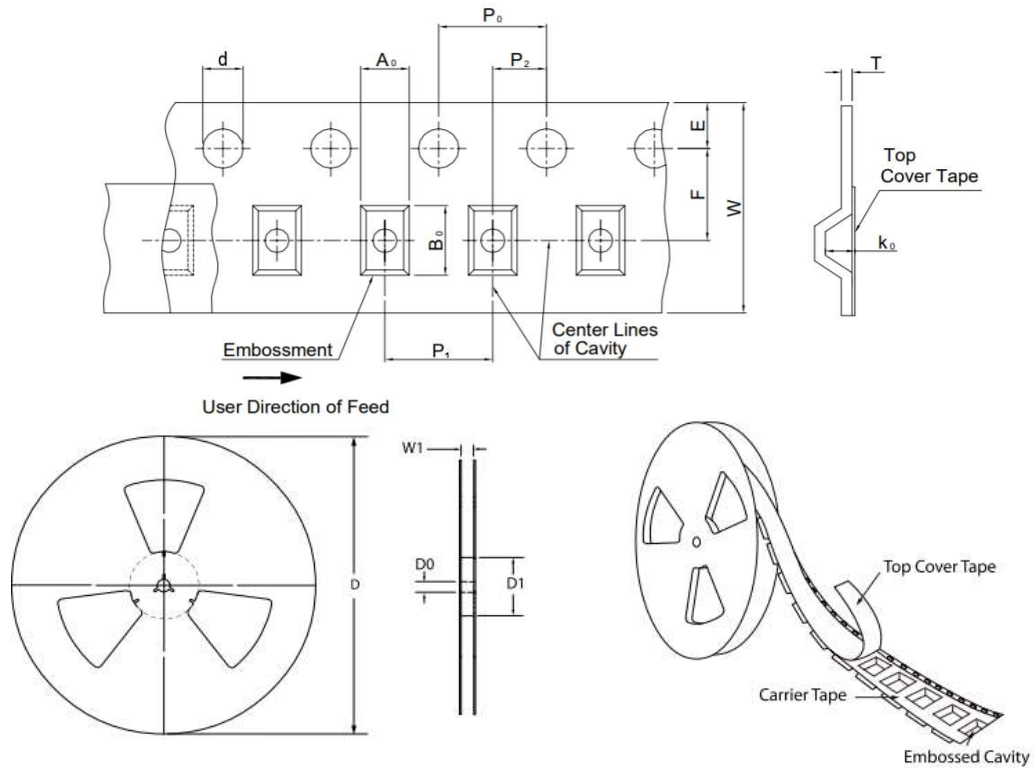

Item	Symbol	DFN1006(0402)
Carrier width	A ₀	0.80 ± 0.10
Carrier length	B ₀	1.20 ± 0.10
Carrier depth	K ₀	0.70 ± 0.10
Sprocket hole	d	1.50 ± 0.10
Reel outside diameter	D	178.00 ± 2.00
Feed hole width	D ₀	13.00 ± 0.50
Reel inner diameter	D ₁	MIN. 50.00
Sprocket hole position	E	1.75 ± 0.10
Punch hole position	F	3.50 ± 0.10
Sprocket hole pitch	P ₀	4.00 ± 0.10
Punch hole pitch	P ₁	2.00 ± 0.10
Embossment center	P ₂	2.00 ± 0.10
Overall tape thickness	T	MAX. 0.60
Tape width	W	8.00 ± 0.30
Reel width	W ₁	8.40 ± 1.50

ORDER INFORMATION

Package	Reel Size	Quantity
DFN1006(0402)	7"	10,000

MARKING CODE


Part Number	Marking Code
RB720LPH	R



RB720LPH

SCHOTTKY DIODES

SUGGESTED SOLDER PAD LAYOUT

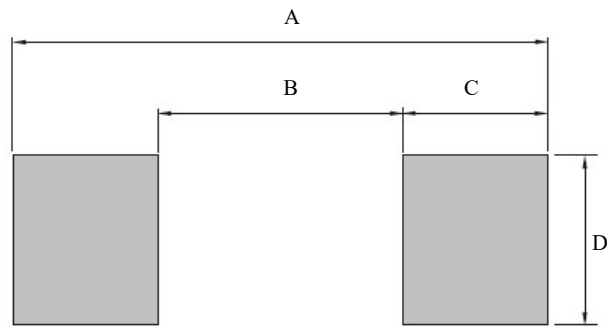

Unit:mm

Package	A	B	C	D
DFN1006(0402)	1.10	0.30	0.40	0.60