




RB751CS-40LPH


SCHOTTKY DIODES

FEATURES

- Low forward voltage
- High reliability
- Suffix "H" indicates Halogen-free parts, ex. RB751CS-40LPH



TOP VIEW

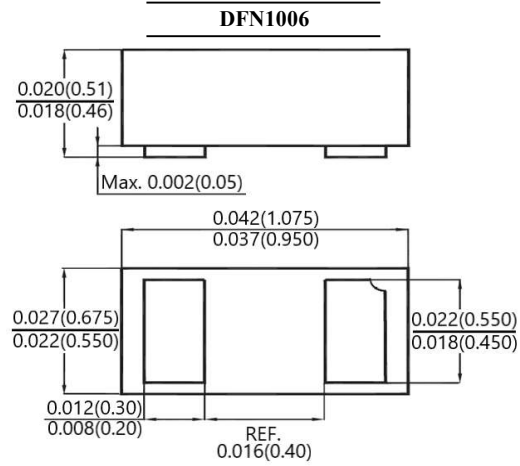

Dimensions in inch and (millimeter)

Maximum Ratings@ $T_A = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	V_{RM}	40	V
Reverse Voltage	V_R	30	V
Average rectified forward current	$I_{F(AV)}$	30	mA
Peak Forward Surge Current (60 Hz for 1 cyc.)	I_{FSM}	200	mA
Operating Junction Temperature	T_J	125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-40 to +125	$^\circ\text{C}$

Electrical Characteristics@ $T_A = 25\text{ }^\circ\text{C}$





Parameter	Conditions	Symbol	Typ.	Max.	Unit
Forward Voltage	$I_F = 1\text{ mA}$	V_F	-	0.37	V
Reverse Current	$V_R = 30\text{ V}$	I_R	-	0.50	μA
Capacitance Between Terminals	$V_R = 1\text{ V}, f = 1\text{ MHz}$	C_T	2	-	pF



RB751CS-40LPH

SCHOTTKY DIODES

Typical Characteristics

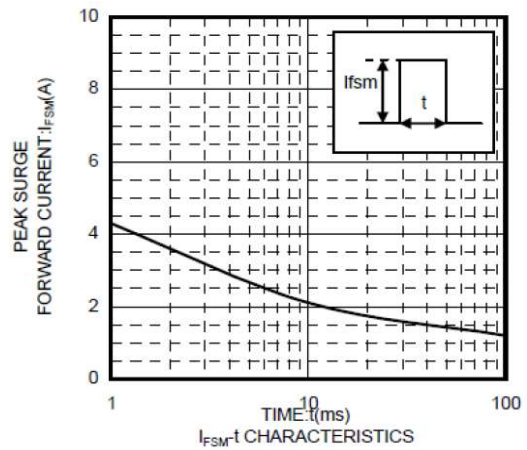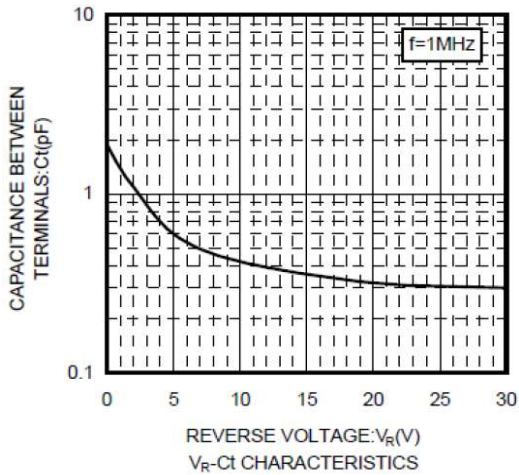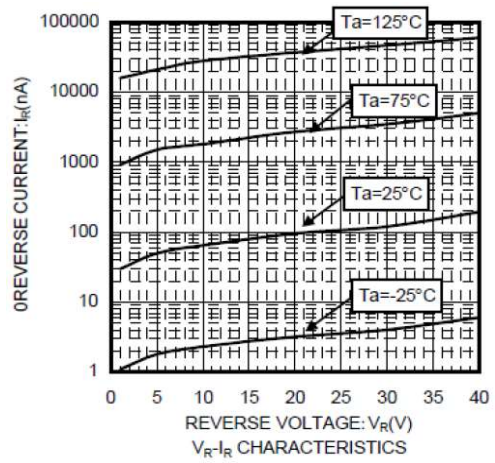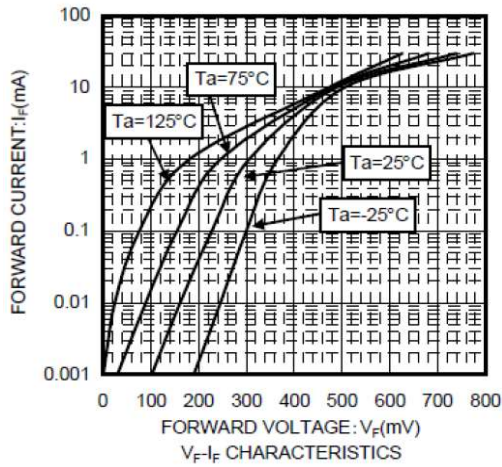




RB751CS-40LPH

SCHOTTKY DIODES

TAPE & REEL SPECIFICATION

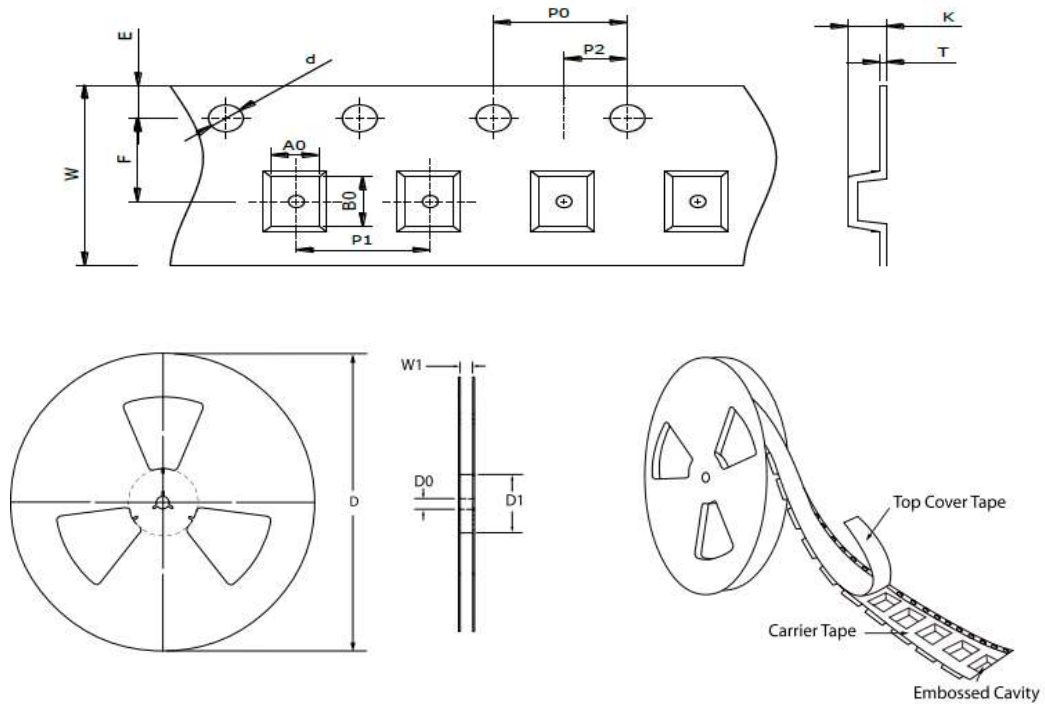

Item	Symbol	DFN1006(0402)
Carrier width	A ₀	0.70 ± 0.10
Carrier length	B ₀	1.10 ± 0.10
Carrier depth	K	0.60 ± 0.10
Sprocket hole	d	1.50 ± 0.10
Reel outside diameter	D	178.00 ± 2.00
Feed hole width	D ₀	13.00 ± 0.50
Reel inner diameter	D ₁	MIN. 54.00
Sprocket hole position	E	1.75 ± 0.10
Punch hole position	F	3.50 ± 0.10
Sprocket hole pitch	P ₀	4.00 ± 0.10
Punch hole pitch	P ₁	2.00 ± 0.10
Embossment center	P ₂	2.00 ± 0.10
Overall tape thickness	T	MAX. 0.60
Tape width	W	8.00 ± 0.30
Reel width	W ₁	8.40 ± 1.50

ORDER INFORMATION

Package	Reel Size	Quantity
DFN1006(0402)	7"	10,000

MARKING CODE


Part Number	Marking Code
RB751CS-40LPH	5



RB751CS-40LPH

SCHOTTKY DIODES

SUGGESTED SOLDER PAD LAYOUT

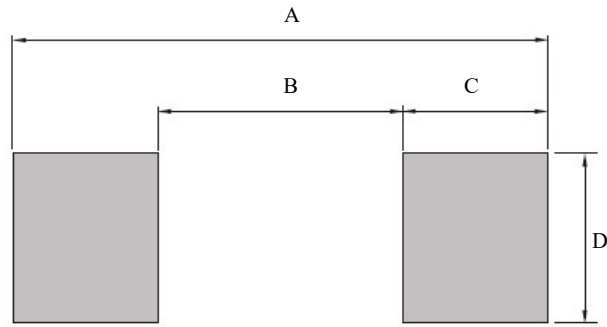

Unit:mm

Package	A	B	C	D
DFN1006(0402)	1.10	0.30	0.40	0.60