



SE03Q2BPDA

ESD Protection Diode

FEATURES


- Meet IEC61000-4-2 (ESD) \pm 30kV (air), \pm 30kV (contact)
- Protects one bi-directional I/O line
- Suffix "H" indicates Halogen-free parts, ex. SE03Q2BPDAH

APPLICATIONS

- Cell Phone Handsets and Accessories
- Subscriber Identity Module(SIM) Card Protection
- Audio and Video Equipment
- Portable Instrumentation

MECHANICAL DATA

Case : DFN1006(0402) mold package
 Terminal : Au/Sn plated, solderable per
 MIL-STD-750, method 2026

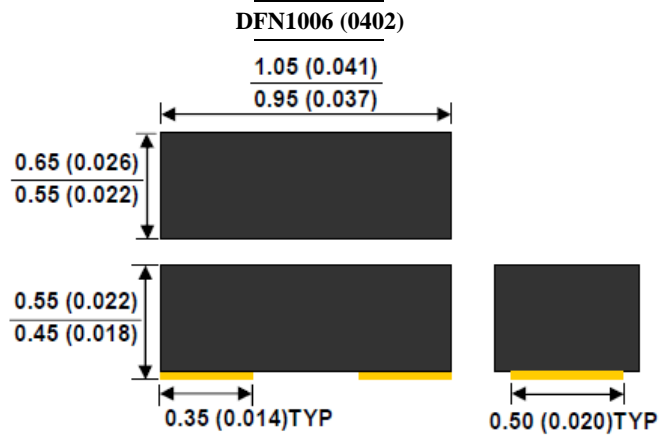

Dimensions in millimeters and (inches)

PIN CONFIGURATION



Maximum Ratings (Rating at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	Value	Units
Peak Pulse Power (tp=8/20μs waveform)	P _{PP}	150	W
Maximum Peak Pulse Current (tp=8/20μs waveform)	I _{PP}	15	A
ESD per IEC 61000-4-2 (Air)	V _{ESD}	±30	kV
ESD per IEC 61000-4-2 (Contact)		±30	
Junction Temperature Range	T _J	125	°C
Junction and Storage Temperature Range	T _{STG}	-55 to +150	°C



SE03Q2BPDA

ESD Protection Diode

Electrical Characteristics (Rating at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	Min	Typ.	Max	Units
Reverse Stand-Off Voltage	V_{RWM}	-	-	3.3	V
Reverse Breakdown Voltage	$I_T = 1\text{mA}$ $V_{(BR)}$	-	-	5.5	V
Reverse Leakage Current	$V_R = 3.3\text{V}$ I_R	-	0.01	1	μA
Clamping Voltage	$I_{pp} = 1\text{A}$, $t_p = 8/20\mu\text{s}$	-	4.5	6.0	V
	$I_{pp} = 15\text{A}$, $t_p = 8/20\mu\text{s}$	-	9.5	12.0	
Junction Capacitance	Between I/O Pin and GND $V_R = 0\text{V}$, $f = 1\text{MHz}$ C_J	-	25	-	pF

RATINGS AND CHARACTERISTIC CURVES

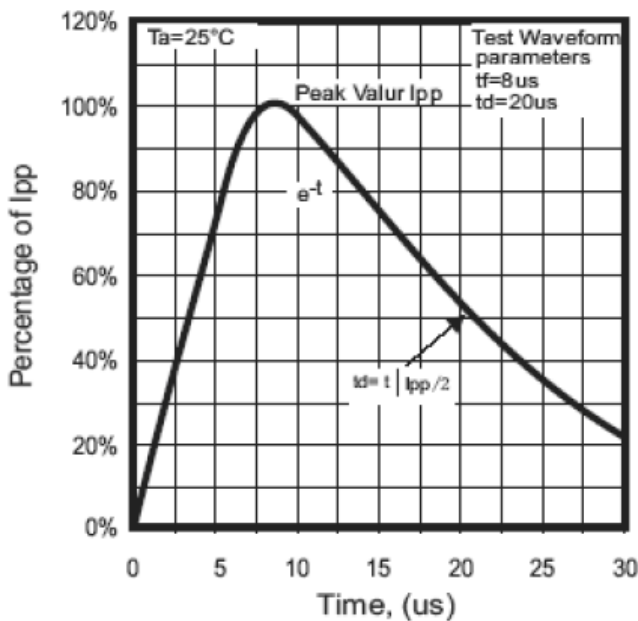


Fig. 1 - 8/20us Peak pulse current waveform acc. IEC 61000-4-5

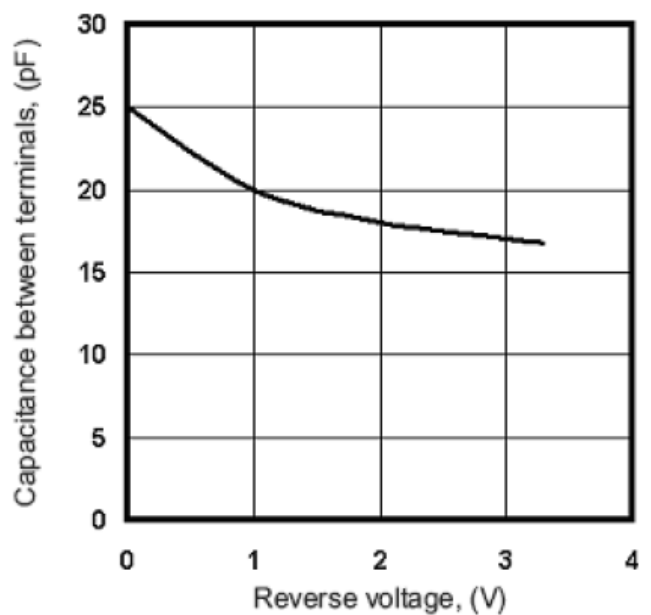


Fig. 2 - Capacitance between terminals characteristics

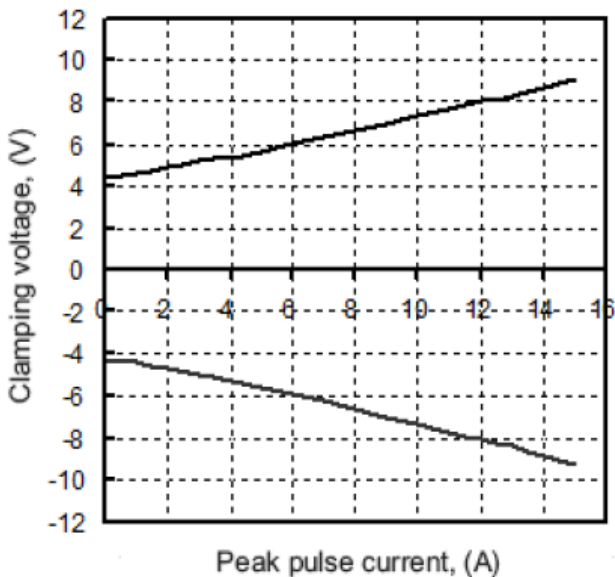


Fig.3 - Clamping voltage vs. peak pulse current

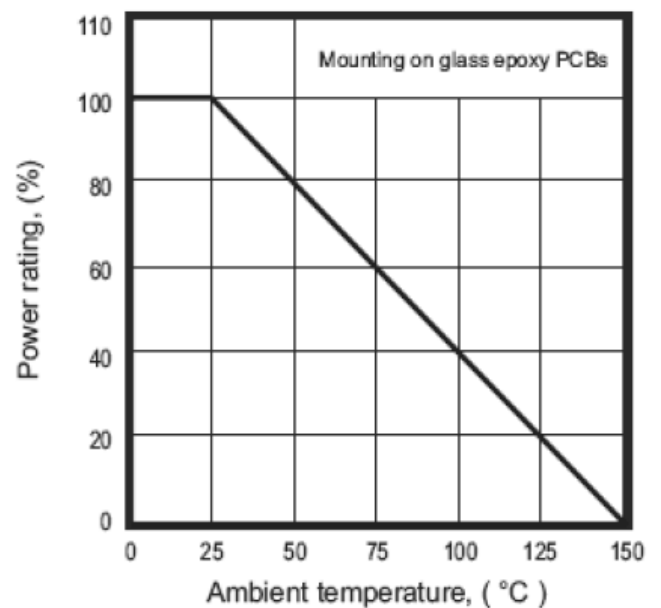


Fig. 4 - Power rating derating curve



SE03Q2BPDA

ESD Protection Diode

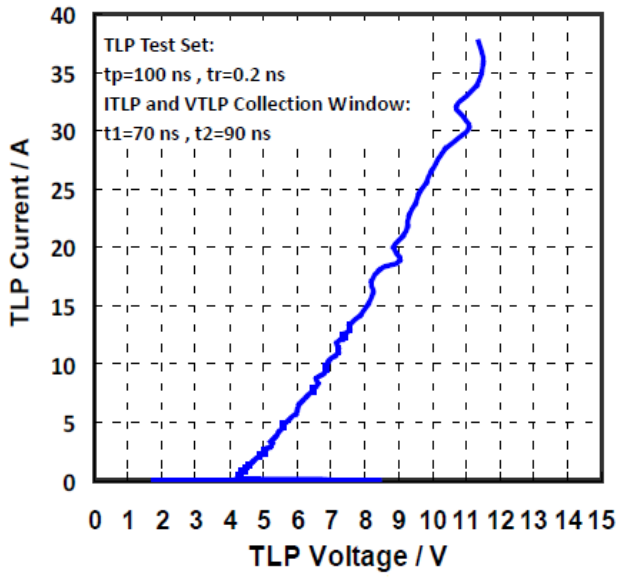



Fig. 5 - TLP Measurement



SE03Q2BPDA

ESD Protection Diode

TAPE & REEL SPECIFICATION

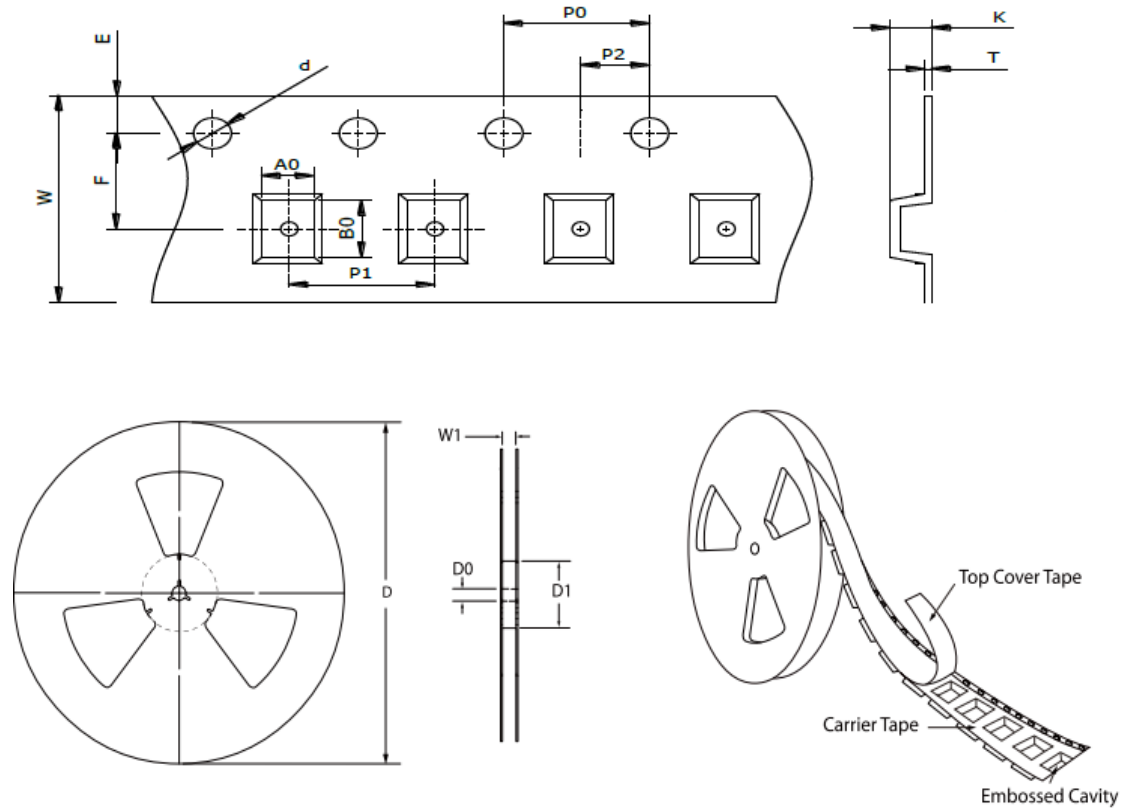

Unit:mm

Item	Symbol	DFN1006 (0402)
Carrier width	A ₀	0.67 ± 0.10
Carrier length	B ₀	1.12 ± 0.10
Carrier depth	K	0.60 ± 0.10
Sprocket hole	d	1.50 ± 0.10
Reel outside diameter	D	178.00 ± 2.00
Feed hole width	D ₀	13.00 ± 0.20
Reel inner diameter	D ₁	MIN. 54.00
Sprocke hole position	E	1.75 ± 0.10
Punch hole position	F	3.50 ± 0.10
Sprocke hole pitch	P ₀	4.00 ± 0.10
Punch hole pitch	P ₁	4.00 ± 0.10
Embossment center	P ₂	2.00 ± 0.10
Overall tape thickness	T	0.22 ± 0.05
Tape width	W	8.00 ± 0.20
Reel width	W1	MAX. 13.50

ORDER INFORMATION

Package	Reel Size	Quantity
DFN1006 (0402)	7"	5,000

MARKING CODE


Part Number	Marking Code
SE03Q2BPDA	E2



SE03Q2BPDA

ESD Protection Diode

SUGGESTED SOLDER PAD LAYOUT

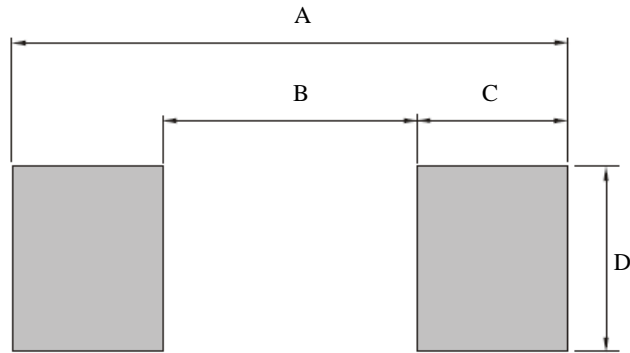

PACKAGE	A	B	C	D
DFN1006(0402)	1.25	0.25	0.50	0.70

Unit:mm