



SE05Q40UDIH

ESD PROTECTION DIODE

FEATURES

- IEC61000-4-2(ESD) ±8kV(Contact)
- Low Clamping Voltage
- Low leakage current
- Working Voltage 5V
- Suffix " H " indicated Halogen-free part, ex.SE05Q40UDIH



APPLICATIONS

- Communication systems
- Medical equipment
- Notebook

MECHANICAL DATA

Case : SOT-23

PIN CONFIGURATION

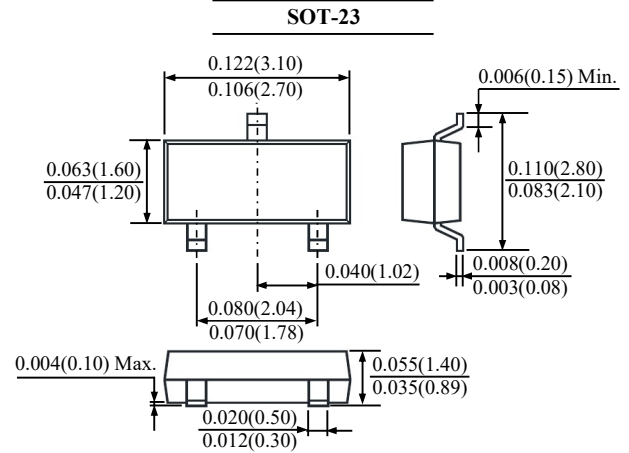

Dimensions in inches and (millimeters)

Maximum Ratings (Rating at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20\mu s$)	P_{PP}	300	W
Peak Pulse Current ($t_p=8/20\mu s$)	I_{PP}	17	A
ESD per IEC 61000-4-2	Air Contact	± 15 ± 8	kV
Operating Temperature Range	T_J	-55 to +125	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C



SE05Q40UDIH

ESD PROTECTION DIODE

Electrical Characteristics Per line at 25°C Unless Otherwise Specified

Parameter	Test Condition	Symbol	Min	Typ.	Max	Units
Reverse Working Voltage	-	V_{RWM}	-	-	5	V
Reverse Breakdown Voltage	$I_T=1mA$	$V_{(BR)}$	6	-	-	V
Reverse Leakage Current	$V_{RWM}=5V$	I_R	-	-	100	μA
Clamping Voltage	$I_{pp}=1A, t_p=8/20\mu s$	V_C	-	-	9.8	V
	$I_{pp}=5A, t_p=8/20\mu s$				12.5	
Junction Capacitance	$V_R=0V, f=1MHz$	C_J	-	-	400	pF

RATINGS AND CHARACTERISTIC CURVES

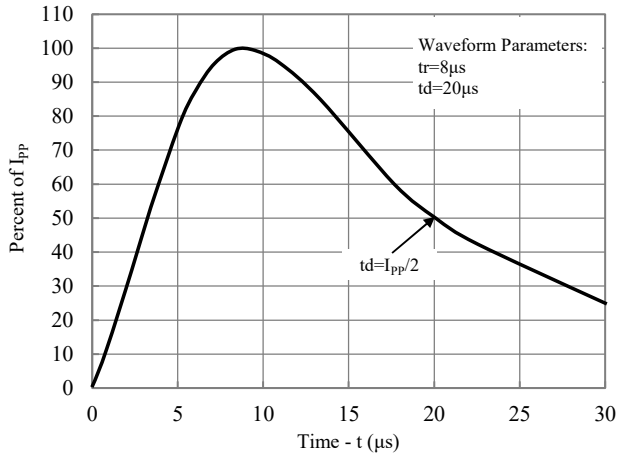


Fig. 1 Pulse Waveform

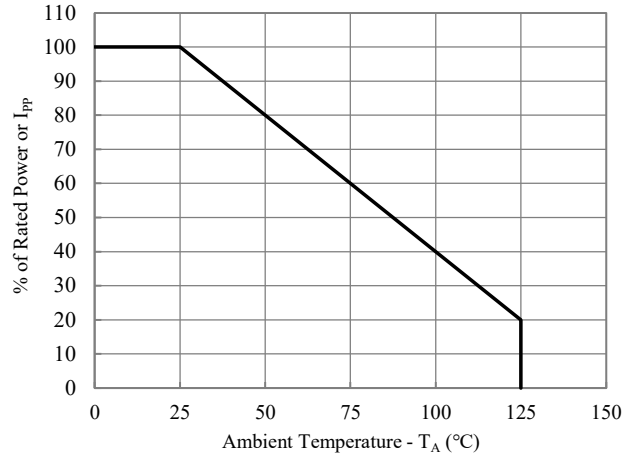


Fig. 2 Power Derating Curve

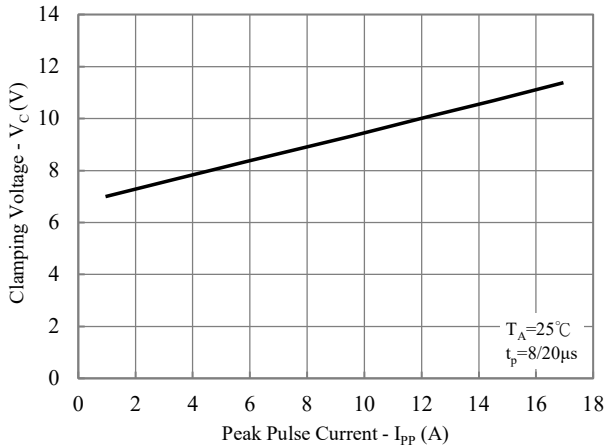


Fig. 3 Clamping Voltage VS. Peak Pulse Current

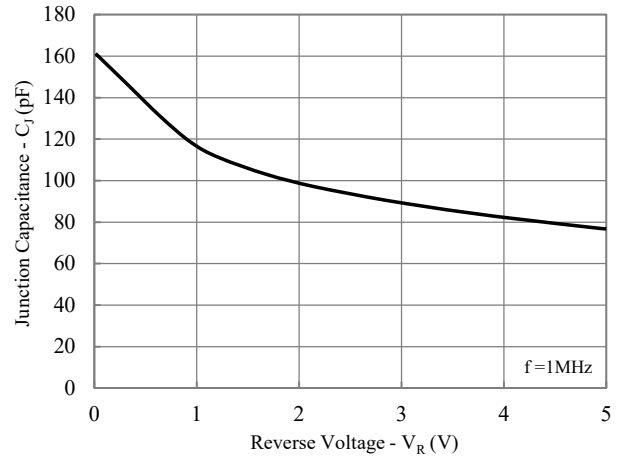


Fig. 4 Junction Capacitance vs. Reverse Voltage



SE05Q40UDIH

ESD PROTECTION DIODE

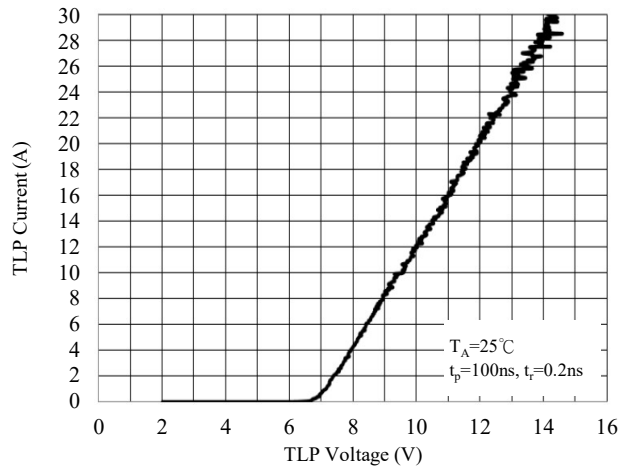



Fig. 5 TLP Curve



SE05Q40UDIH

ESD PROTECTION DIODE

TAPE & REEL SPECIFICATION

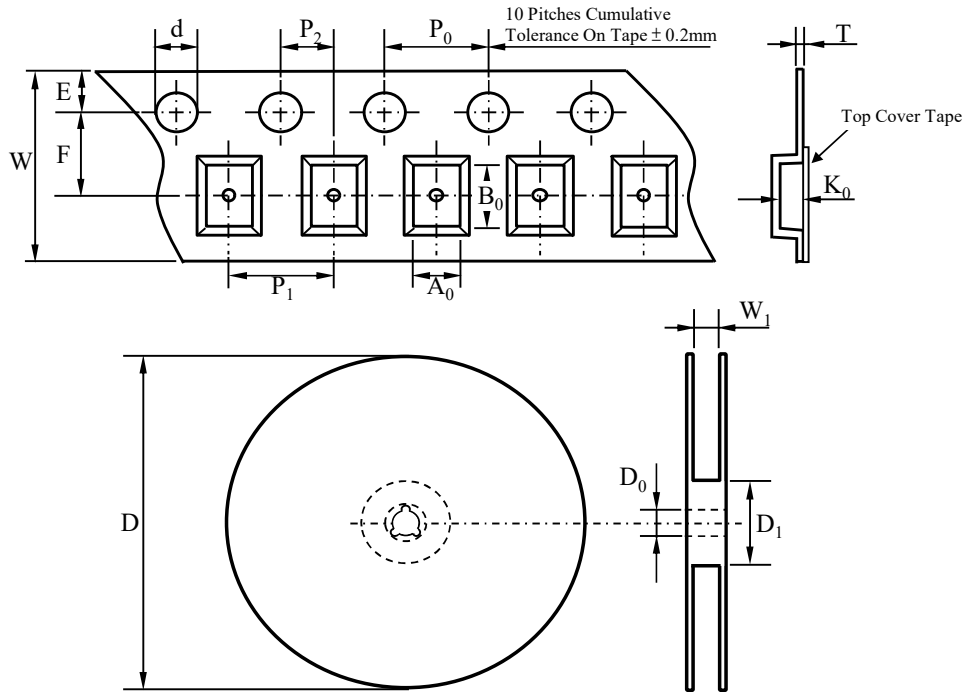

Item	Symbol	SOT-23
Carrier width	A_0	*
Carrier length	B_0	
Carrier depth	K_0	
Sprocket hole	d	1.50 ± 0.10
Reel outside diameter	D	178.00 ± 2.00
Feed hole width	D_0	13.00 ± 0.50
Reel inner diameter	D_1	MIN. 54.00
Sprocket hole position	E	1.75 ± 0.10
Punch hole position	F	3.50 ± 0.10
Sprocket hole pitch	P_0	4.00 ± 0.10
Punch hole pitch	P_1	4.00 ± 0.10
Embossment center	P_2	2.00 ± 0.10
Overall tape thickness	T	MAX. 0.60
Tape width	W	8.00 ± 0.30
Reel width	W_1	MAX. 10.00

Note *: A_0 , B_0 , and K_0 are determined by component size. The clearance between the components and the cavity must be within 0.05 mm min. to 0.5 mm max.

ORDER INFORMATION


Part Number	Marking Code	Reel Size	Quantity
SE05Q40UDIH	05C	7"	3,000



SE05Q40UDIH

ESD PROTECTION DIODE

SUGGESTED SOLDER PAD LAYOUT

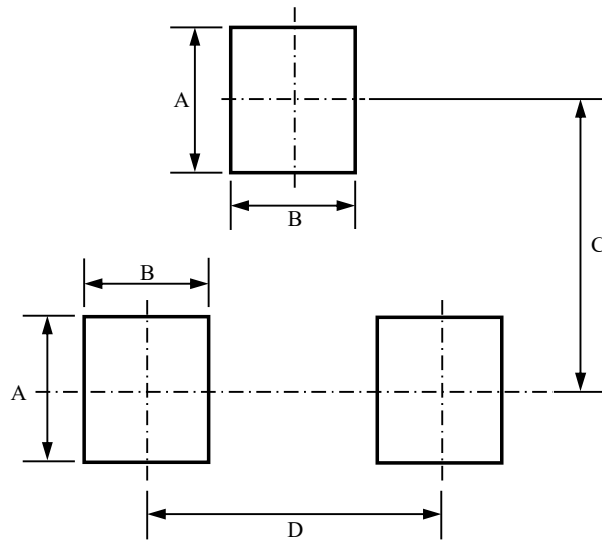

Unit :mm

PACKAGE	A	B	C	D
SOT-23	1.00	0.80	2.00	1.90