



# SE18L5BDDAH

## ESD PROTECTION DIODE


### FEATURES

- IEC61000-4-2(ESD)  $\pm 15\text{kV}$ (air),  $\pm 8\text{kV}$ (Contact)
- Bi-direction ESD Protection
- Low Capacitance
- Low Clamping Voltage
- Suffix " H " indicated Halogen-free part, ex.SE18L5BDDAH

### MECHANICAL DATA

Case : DFN1006(0402) mold package

### PIN CONFIGURATION

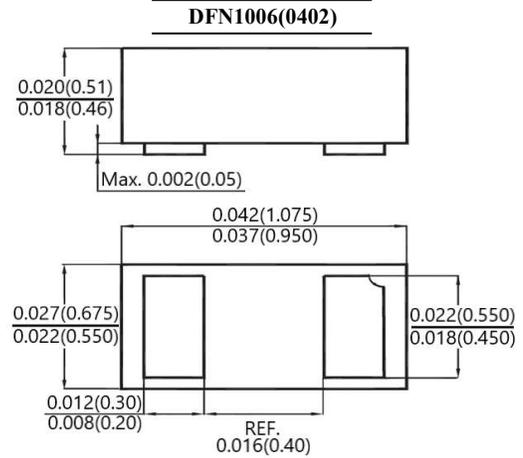

### Maximum Ratings (Rating at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu\text{s}$ )	$P_{PP}$	68	W
Peak Pulse Current ( $t_p = 8/20\mu\text{s}$ )	$I_{PP}$	1.8	A
ESD per IEC 61000-4-2 (Air)	$V_{ESD}$	$\pm 15$	kV
ESD per IEC 61000-4-2 (Contact)		$\pm 8$	
Operating Temperature Range	$T_J$	-55 to +125	°C
Storage Temperature Range	$T_{STG}$	-55 to +150	°C




# SE18L5BDDAH

## ESD PROTECTION DIODE


Electrical Characteristics Per line @ 25°C Unless Otherwise Specified

Parameter	Test Conditon	Symbol	Min.	Typ.	Max.	Units
Reverse Stand-Off Voltage	-	$V_{RWM}$	-	-	18	V
Reverse Breakdown Voltage	$I_R=1\text{mA}$	$V_{BR}$	19	-	24	V
Reverse Leakage Current	$V_{RWM}=18\text{V}$	$I_R$	-	-	0.2	$\mu\text{A}$
Clamping Voltage	$I_{pp}=1\text{A}, t_p=8/20\mu\text{s}$	$V_C$	-	-	32	V
	$I_{pp}=1.8\text{A}, t_p=8/20\mu\text{s}$		-	-	38	
Junction Capacitance	$V_R=0\text{V}, f=1\text{MHz}$	$C_J$	-	0.5	-	pF


### RATINGS AND CHARACTERISTIC CURVES

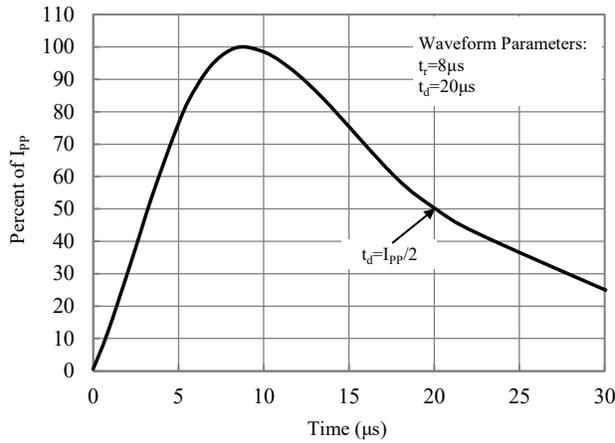


**Pulse Waveform**

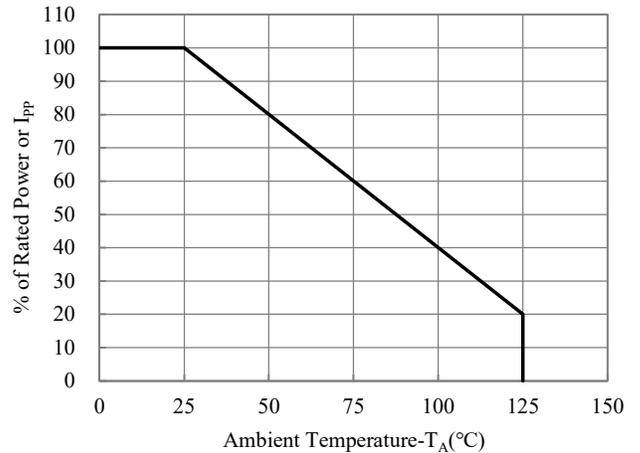

**Power Derating Curve**

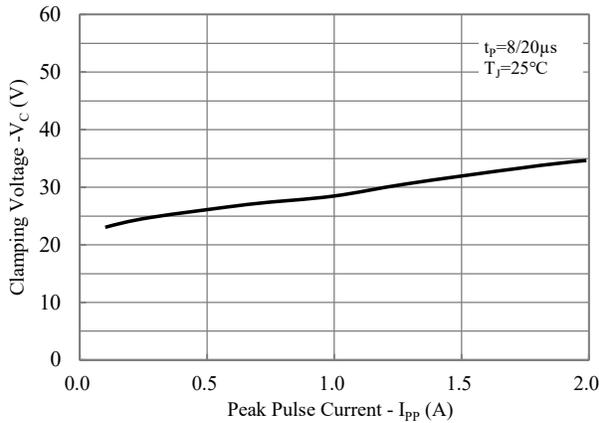

**Clamping Voltage vs. Peak Pulse Current**

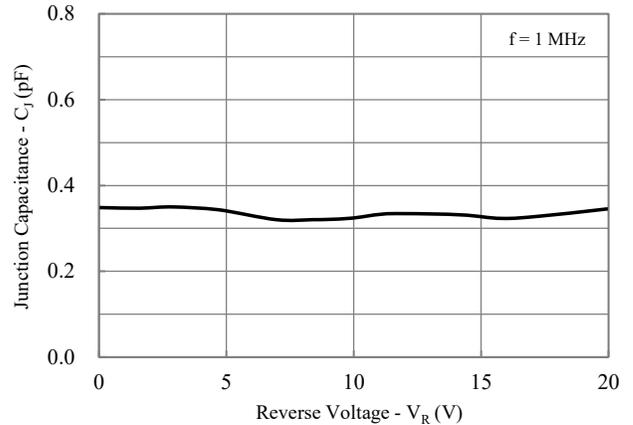


**Junction Capacitance vs. Reverse Voltage**



# SE18L5BDDAH

## ESD PROTECTION DIODE

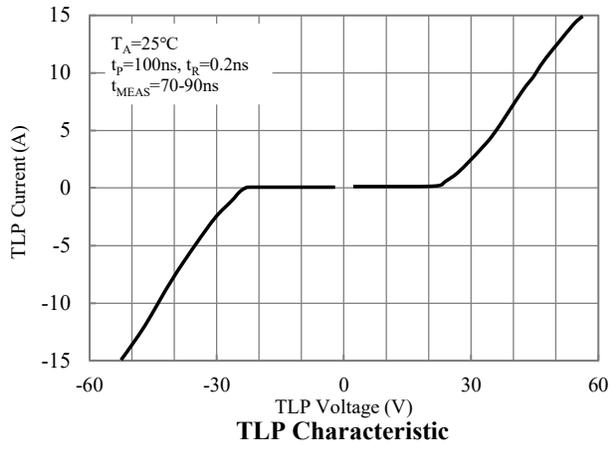




# SE18L5BDDAH

## ESD PROTECTION DIODE

### TAPE & REEL SPECIFICATION

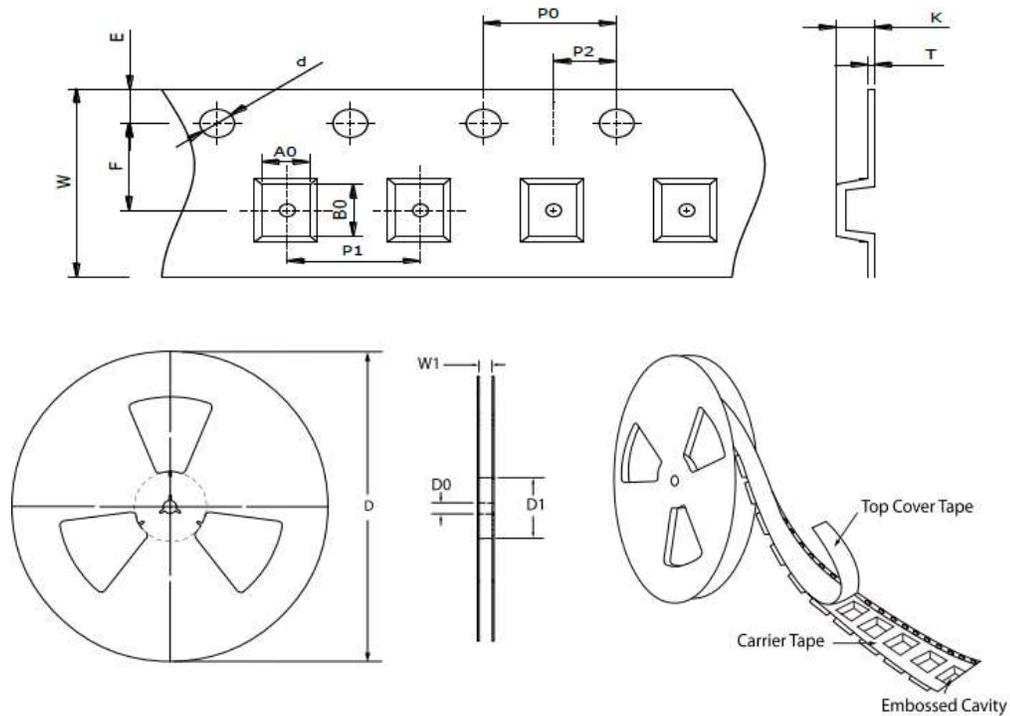

Item	Symbol	DFN1006(0402)
Carrier width	A <sub>0</sub>	0.70 ± 0.10
Carrier length	B <sub>0</sub>	1.10 ± 0.10
Carrier depth	K	0.60 ± 0.10
Sprocket hole	d	1.50 ± 0.10
Reel outside diameter	D	178.00 ± 2.00
Feed hole width	D <sub>0</sub>	13.00 ± 0.50
Reel inner diameter	D <sub>1</sub>	MIN. 54.00
Sprocket hole position	E	1.75 ± 0.10
Punch hole position	F	3.50 ± 0.10
Sprocket hole pitch	P <sub>0</sub>	4.00 ± 0.10
Punch hole pitch	P <sub>1</sub>	2.00 ± 0.10
Embossment center	P <sub>2</sub>	2.00 ± 0.10
Overall tape thickness	T	MAX. 0.60
Tape width	W	8.00 ± 0.30
Reel width	W <sub>1</sub>	8.40 ± 1.50

### ORDER INFORMATION

Package	Reel Size	Quantity
DFN1006(0402)	7"	10,000

### MARKING CODE


Part Number	Marking Code
SE18L5BDDAH	18



# SE18L5BDDAH

## ESD PROTECTION DIODE

### SUGGESTED SOLDER PAD LAYOUT

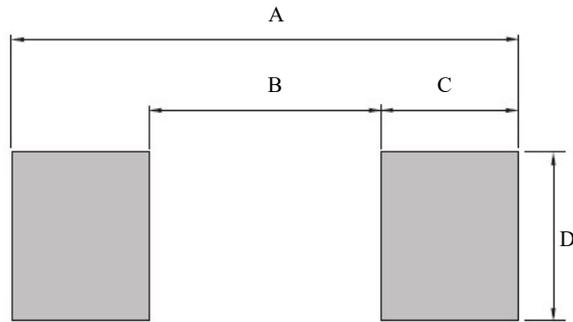

Unit:mm

Package	A	B	C	D
DFN1006(0402)	1.10	0.30	0.40	0.60