




SM06P120TDH



P-Channel Enhancement Mode Field Effect Transistor

FEATURES

- Low gate charge
- Suffix "H" indicates Halogen-free parts, ex. SM06P120TDH.



D	Drain
G	Gate
S	Source

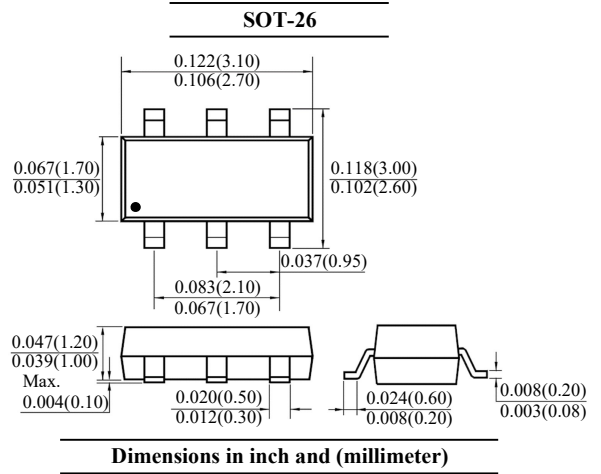

Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	-60	V
Gate-Source Voltage	V_{GSS}	± 20	V
Drain Current	I_D	-3	A
Pulsed Drain Current (Note 1)	I_{DM}	-16	A
Power Dissipation	P_D	1.6	W
Thermal Resistance from Junction to Ambient (Note 2)	$R_{\theta JA}$	78	$^\circ\text{C} / \text{W}$
Operating and Storage Temperature Range	T_J, T_{stg}	- 55 to + 150	$^\circ\text{C}$

Note:

1. Pulse width $\leq 100\mu\text{s}$, Duty cycle $\leq 2\%$, Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)} = 150^\circ\text{C}$
2. Device mounted on FR-4 substrate PC board, 2oz copper, with 1-inch square copper plate in still air.



SM06P120TDH

P-Channel Enhancement Mode Field Effect Transistor

Electrical Characteristics ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified)

Parameter	Conditions	Symbol	Min.	Typ.	Max.	Unit
Static						
Drain Source Breakdown Voltage	$I_D = -250\mu\text{A}$	$V_{(BR)DSS}$	-60	-	-	V
Zero Gate Voltage Drain Current	$V_{DS} = -48\text{V}$	I_{DSS}	-	-	-1	μA
Gate Source Leakage Current	$V_{GS} = \pm 20\text{V}$	I_{GSS}	-	-	± 0.1	μA
Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$	$V_{GS(th)}$	-1.3	-	-2.5	V
Static Drain Source On-Resistance	$V_{GS} = -10\text{V}, I_D = -2\text{A}$	$R_{DS(on)}$	-	-	120	m Ω
	$V_{GS} = -4.5\text{V}, I_D = -1\text{A}$		-	-	145	
Forward Transconductance	$V_{DS} = -5\text{V}, I_D = -3\text{A}$	g_{FS}	-	7	-	S
Dynamic						
Total Gate Charge	$V_{DS} = -30\text{V}, I_D = -3\text{A}, V_{GS} = -4.5\text{V}$	Q_g	-	7.2	-	nC
			-	15.4	-	
			Q_{gs}	-	3.0	
Gate-Source Charge	$V_{DS} = -30\text{V}, I_D = -3\text{A}, V_{GS} = -10\text{V}$	Q_{gs}	-	3.0	-	pF
Gate-Drain Charge		Q_{gd}	-	2.2	-	
Input Capacitance		C_{iss}	-	917	-	
Output Capacitance	$V_{DS} = -30\text{V}, V_{GS} = 0\text{V}, f = 1\text{MHz}$	C_{oss}	-	50	-	pF
Reverse Transfer Capacitance		C_{rss}	-	16	-	
Turn on Delay Time	$V_{DD} = -30\text{V}, I_D = -3\text{A}, V_{GS} = -10\text{V}, R_{gen} = 5.1\Omega$	$t_{d(on)}$	-	12.0	-	ns
Turn on Rise Time		t_r	-	7.2	-	
Turn off Delay Time		$t_{d(off)}$	-	15.0	-	
Turn off Fall Time		t_f	-	3.4	-	
Drain-Source Body Diode						
Diode Forward Voltage	$I_S = -1.3\text{A}$	V_{SD}	-	-	-1.2	V
Diode Continuous Forward Current	-	I_S	-	-	-3	A
Reverse Recovery Time	$I_S = -3\text{A}, di/dt = 100\text{A}/\mu\text{s}$	t_{rr}	-	14	-	ns
Reverse Recovery Charge		Q_{rr}	-	10	-	nC



SM06P120TDH

P-Channel Enhancement Mode Field Effect Transistor

RATINGS AND CHARACTERISTIC CURVES

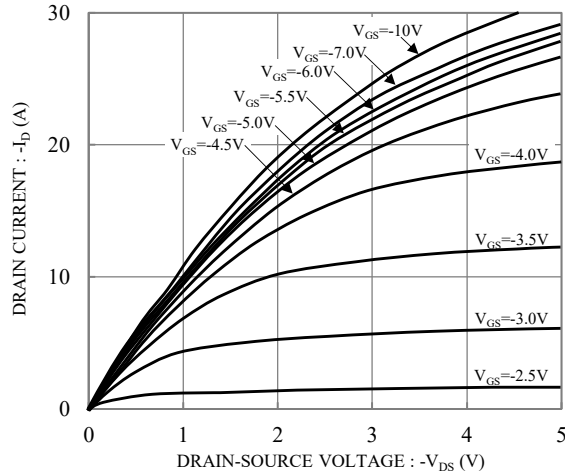


Fig.1 Typical Output Characteristics

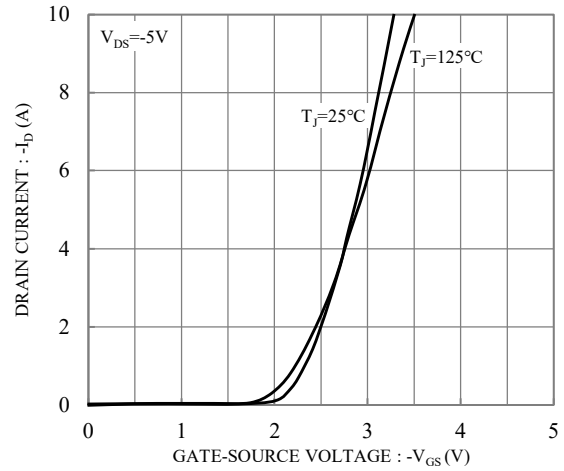


Fig.2 Typical Transfer Characteristics

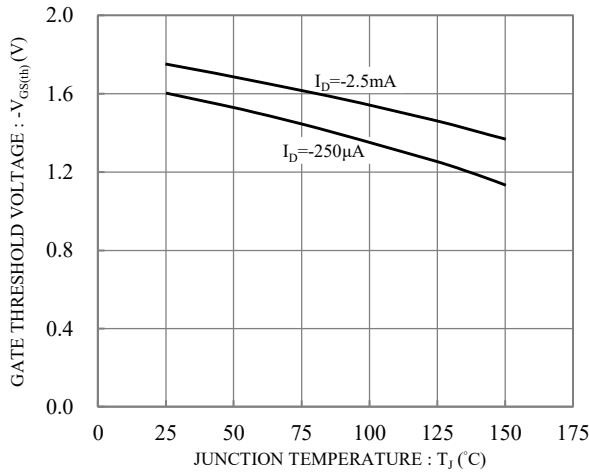


Fig.3 Gate Threshold Voltage vs. Junction Temperature

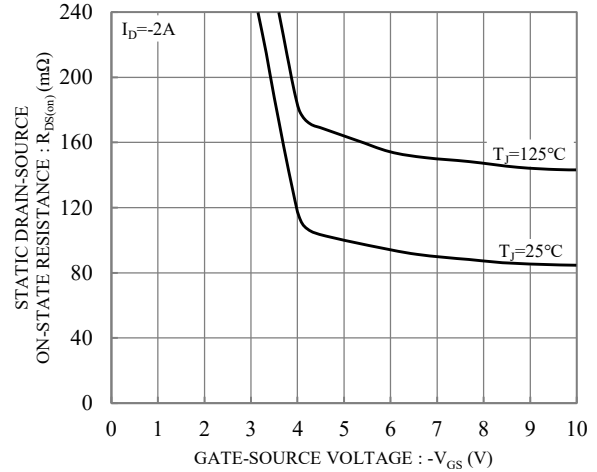


Fig.4 Static Drain-Source On-State Resistance vs. Gate-Source Voltage

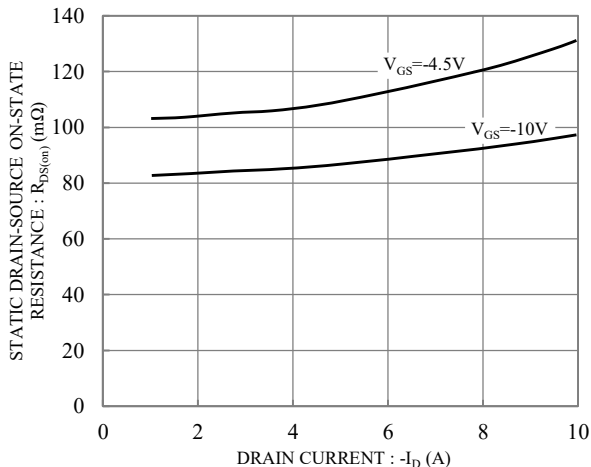


Fig.5 Static Drain-Source On-State Resistance vs. Drain Current

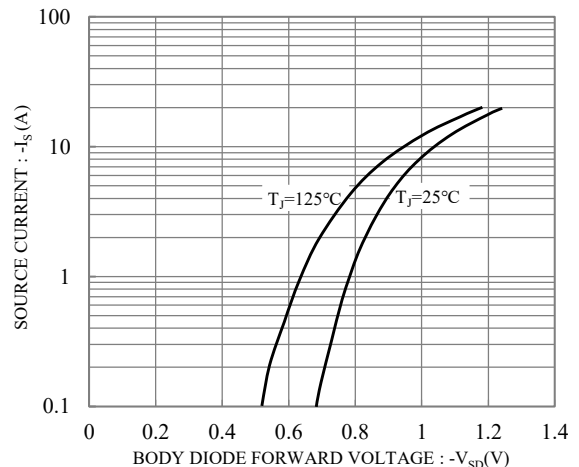


Fig.6 Body Diode Forward Voltage vs. Source Current



SM06P120TDH

P-Channel Enhancement Mode Field Effect Transistor

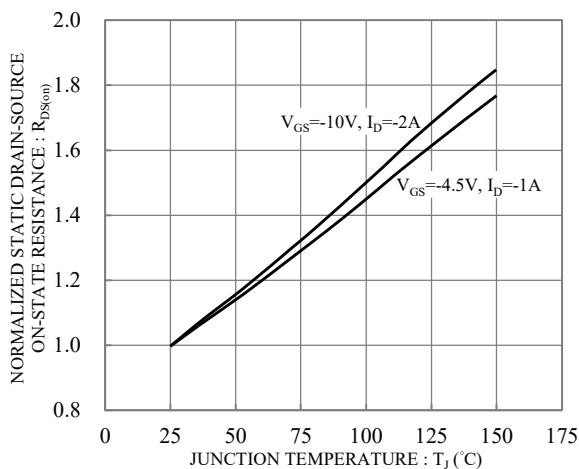


Fig.7 Drain-Source On-State Resistance vs. Junction Temperature

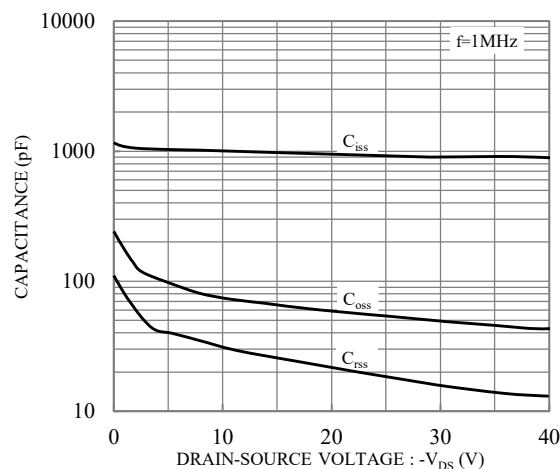


Fig.8 Capacitance vs. Drain-Source Voltage

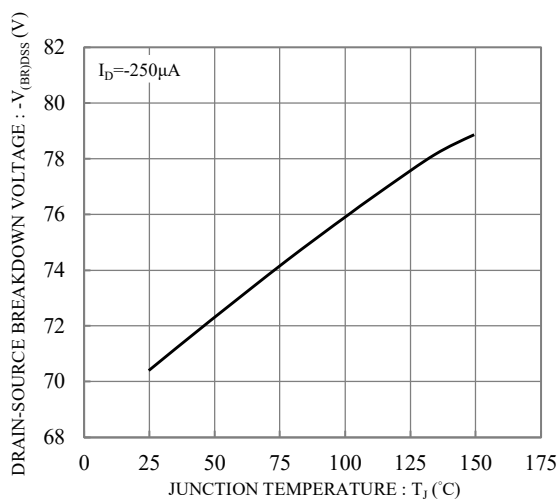


Fig.9 Breakdown Voltage vs. Junction Temperature

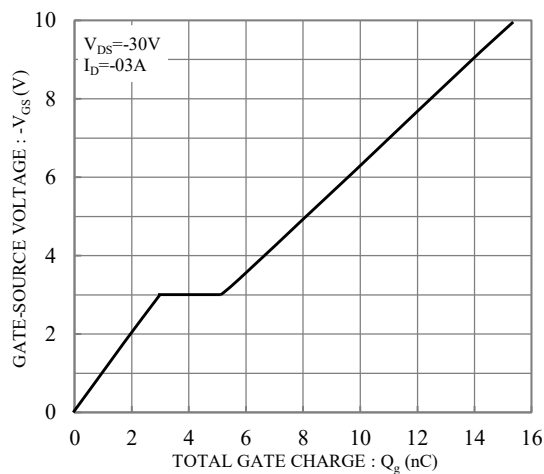



Fig.10 Gate Charge Characteristics



SM06P120TDH

P-Channel Enhancement Mode Field Effect Transistor

TAPE & REEL SPECIFICATION

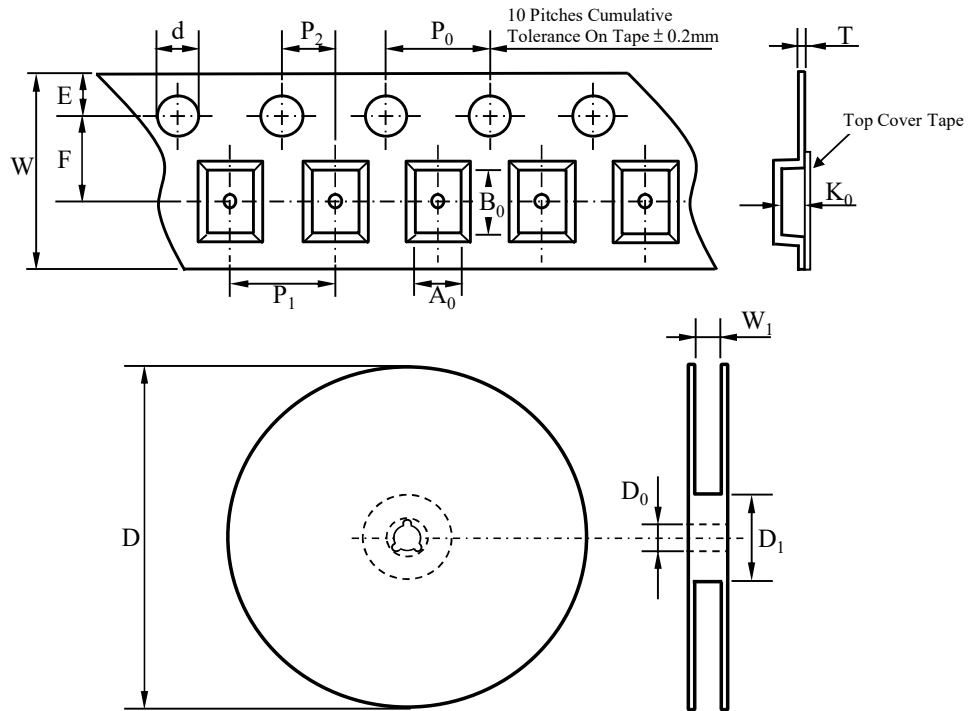

Item	Symbol	SOT-26
Carrier width	A_0	*
Carrier length	B_0	
Carrier depth	K_0	
Sprocket hole	d	1.50 ± 0.10
Reel outside diameter	D	178.00 ± 2.00
Feed hole width	D_0	13.00 ± 0.50
Reel inner diameter	D_1	MIN. 50.00
Sprocket hole position	E	1.75 ± 0.10
Punch hole position	F	3.50 ± 0.10
Sprocket hole pitch	P_0	4.00 ± 0.10
Punch hole pitch	P_1	4.00 ± 0.10
Embossment center	P_2	2.00 ± 0.10
Overall tape thickness	T	0.60 ± 0.10
Tape width	W	8.00 ± 0.30
Reel width	W_1	MAX. 10.00

Note *: A_0 , B_0 , and K_0 are determined by component size. The clearance between the components and the cavity must be within 0.05 mm min. to 0.5 mm max.

ORDER INFORMATION


Part Number	Marking Code	Reel Size	Quantity
SM06P120TDH	PJ	7"	3,000



SM06P120TDH

P-Channel Enhancement Mode Field Effect Transistor

SUGGESTED SOLDER PAD LAYOUT

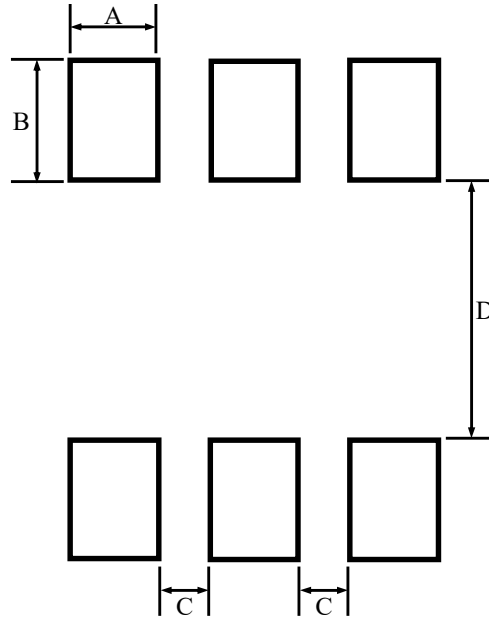

Unit :mm

PACKAGE	A	B	C	D
SOT-26	0.70	1.00	0.25	1.40