





SM290KWTH


N-Channel Enhancement Mode Field Effect Transistor

FEATURES

- ESD protected up to 2kV
- Suffix "H" indicates Halogen-free parts, ex. SM290KWTH



D	Drain
G	Gate
S	Source

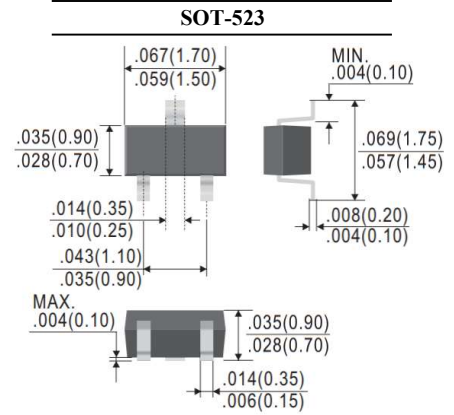

Dimensions in inch and (millimeter)

Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	20	V
Gate-Source Voltage	V_{GSS}	± 8	V
Drain Current	I_D	700 440	mA
		at $V_{GS}=4.5\text{V}$, $T_A=25^\circ\text{C}$ at $V_{GS}=4.5\text{V}$, $T_A=100^\circ\text{C}$	
Peak Pulse Drain Current (Note 1)	I_{DM}	2.8	A
Total Power Dissipation	P_D	300	mW
Thermal Resistance from Junction to Ambient (Note 2)	$R_{\theta JA}$	416	$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_J, T_{STG}	- 55 to + 150	$^\circ\text{C}$

Note :

1. Pulse width $\leq 100\mu\text{s}$, Duty cycle $\leq 2\%$, Repetitive rating, pulse width limited by junction temperature $T_{J(\text{MAX})}=150^\circ\text{C}$.
2. Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.



SM290KWITH

N-Channel Enhancement Mode Field Effect Transistor

Electrical Characteristics ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified)

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Unit
Static						
Drain Source Breakdown Voltage	$I_D = 250\mu\text{A}$	$V_{(BR)DSS}$	20	-	-	V
Zero Gate Voltage Drain Current	$V_{DS} = 20\text{V}$	I_{DSS}	-	-	1	μA
Gate Source Leakage Current	$V_{GS} = \pm 8\text{V}$	I_{GSS}	-	-	± 2	μA
	$V_{GS} = \pm 4.5\text{V}$		-	-	± 0.5	
Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	$V_{GS(th)}$	0.50	-	0.95	V
Static Drain Source On-Resistance	$V_{GS} = 4.5\text{V}, I_D = 0.5\text{A}$	$R_{DS(on)}$	-	-	0.38	Ω
	$V_{GS} = 2.5\text{V}, I_D = 0.4\text{A}$		-	-	0.62	
	$V_{GS} = 1.8\text{V}, I_D = 0.1\text{A}$		-	-	1.10	
Dynamic						
Gate Resistance	$V_{GS} = 0\text{V}, V_{DS} = 0\text{V}, f = 1\text{MHz}$	R_g	-	112	-	Ω
Total Gate Charge	$V_{DS} = 10\text{V}, V_{GS} = 2.5\text{V}, I_D = 1\text{A}$	Q_g	-	0.6	-	nC
			-	1.1	-	
Gate-Source Charge	$V_{DS} = 10\text{V}, V_{GS} = 4.5\text{V}, I_D = 1\text{A}$	Q_{gs}	-	0.3	-	
Gate-Drain Charge		Q_{gd}	-	0.2	-	
Input Capacitance	$V_{GS} = 0\text{V}, V_{DS} = 10\text{V}, f = 1\text{MHz}$	C_{iss}	-	72	-	pF
Output Capacitance		C_{oss}	-	14	-	
Reverse Transfer Capacitance		C_{rss}	-	12	-	
Turn-On Delay Time	$V_{DS} = 10\text{V}, V_{GS} = 4.5\text{V}, I_D = 0.5\text{A}, R_g = 10\Omega$	$t_{d(on)}$	-	12	-	ns
Rise Time		t_r	-	6	-	
Turn-Off Delay Time		$t_{d(off)}$	-	13	-	
Fall time		t_f	-	10	-	
Drain-Source Body Diode						
Diode Forward Voltage	$V_{GS} = 0\text{V}, I_S = 0.5\text{A}$	V_{SD}	-	0.8	1.3	V
Reverse Recovery Time	$I_S = 1\text{A}, di/dt = 100\text{A}/\mu\text{s}$	t_{rr}	-	5.2	-	ns
Reverse Recovery Charge		Q_{rr}	-	1.2	-	nC



SM290KWTH

N-Channel Enhancement Mode Field Effect Transistor

RATINGS AND CHARACTERISTIC CURVES

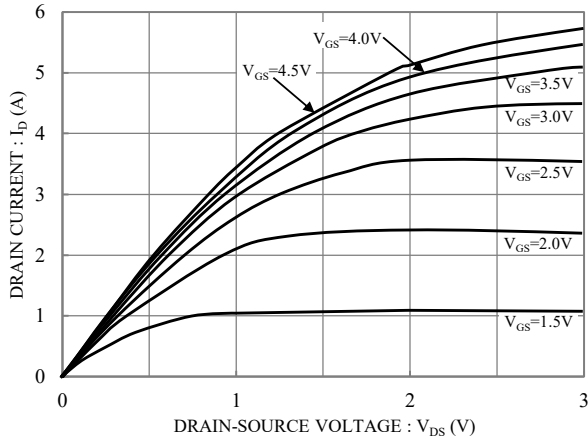


Fig.1 Typical output characteristics

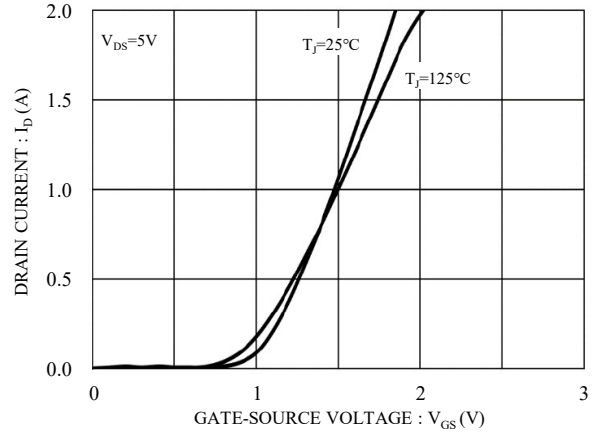


Fig.2 Typical transfer characteristics

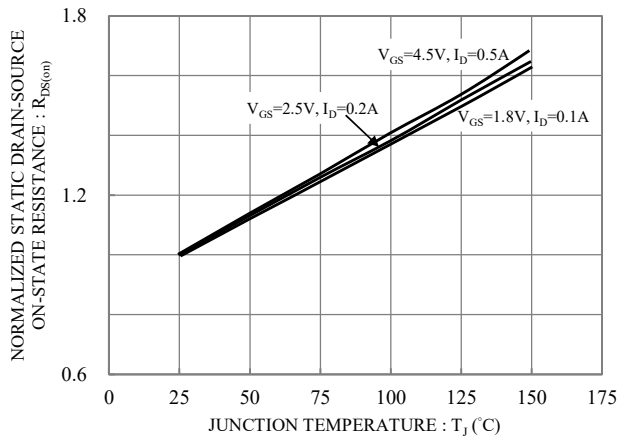


Fig.3 Drain-Source On-State Resistance vs. Junction Temperature

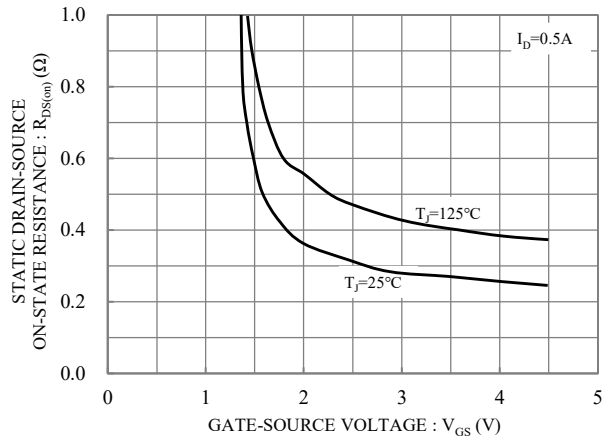


Fig.4 Static drain-source on-state resistance vs. gate-source voltage

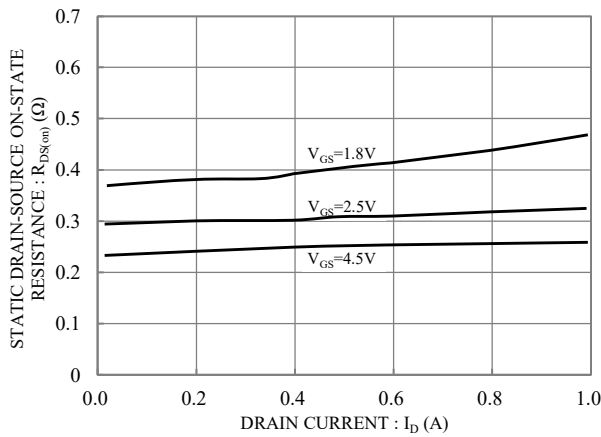


Fig.5 Static drain-source on-state resistance vs. Drain current

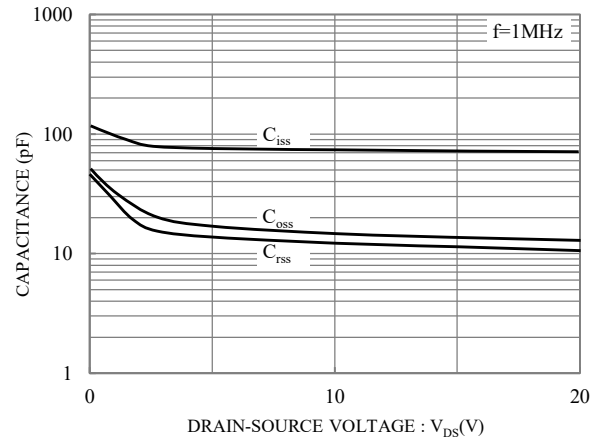


Fig.6 Capacitance vs. Drain-to-Source Voltage



SM290KWTH

N-Channel Enhancement Mode Field Effect Transistor

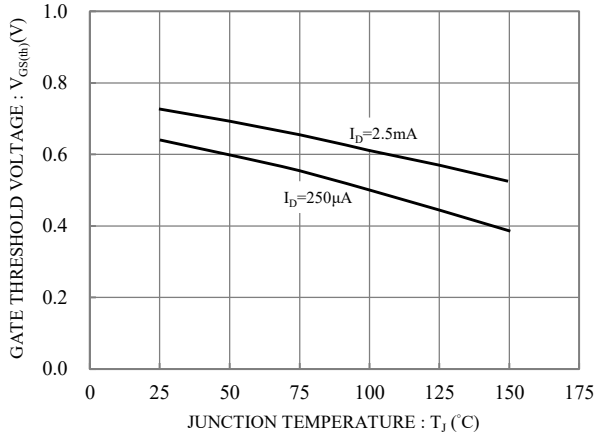


Fig.7 Threshold Voltage vs Junction Temperature

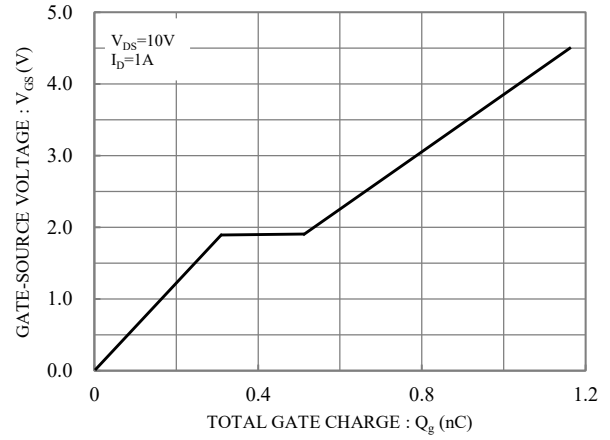


Fig.8 Gate Charge Characteristics

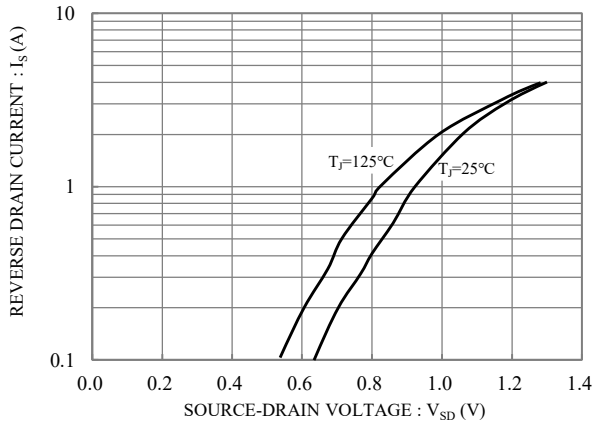


Fig.9 Typical Forward Characteristic

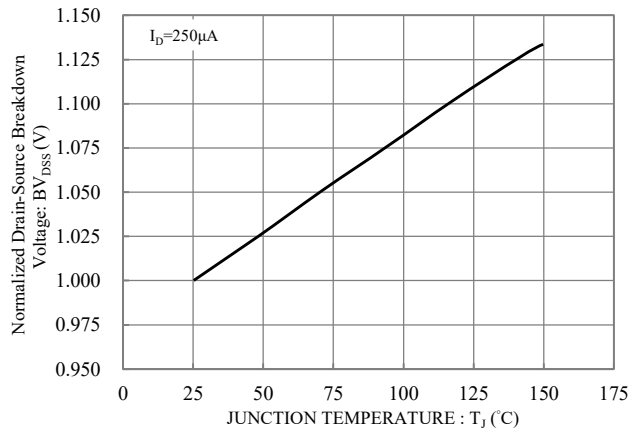



Fig.10 Brekdown Voltage vs Junction Temperature



SM290KWTH

N-Channel Enhancement Mode Field Effect Transistor

TAPE & REEL SPECIFICATION

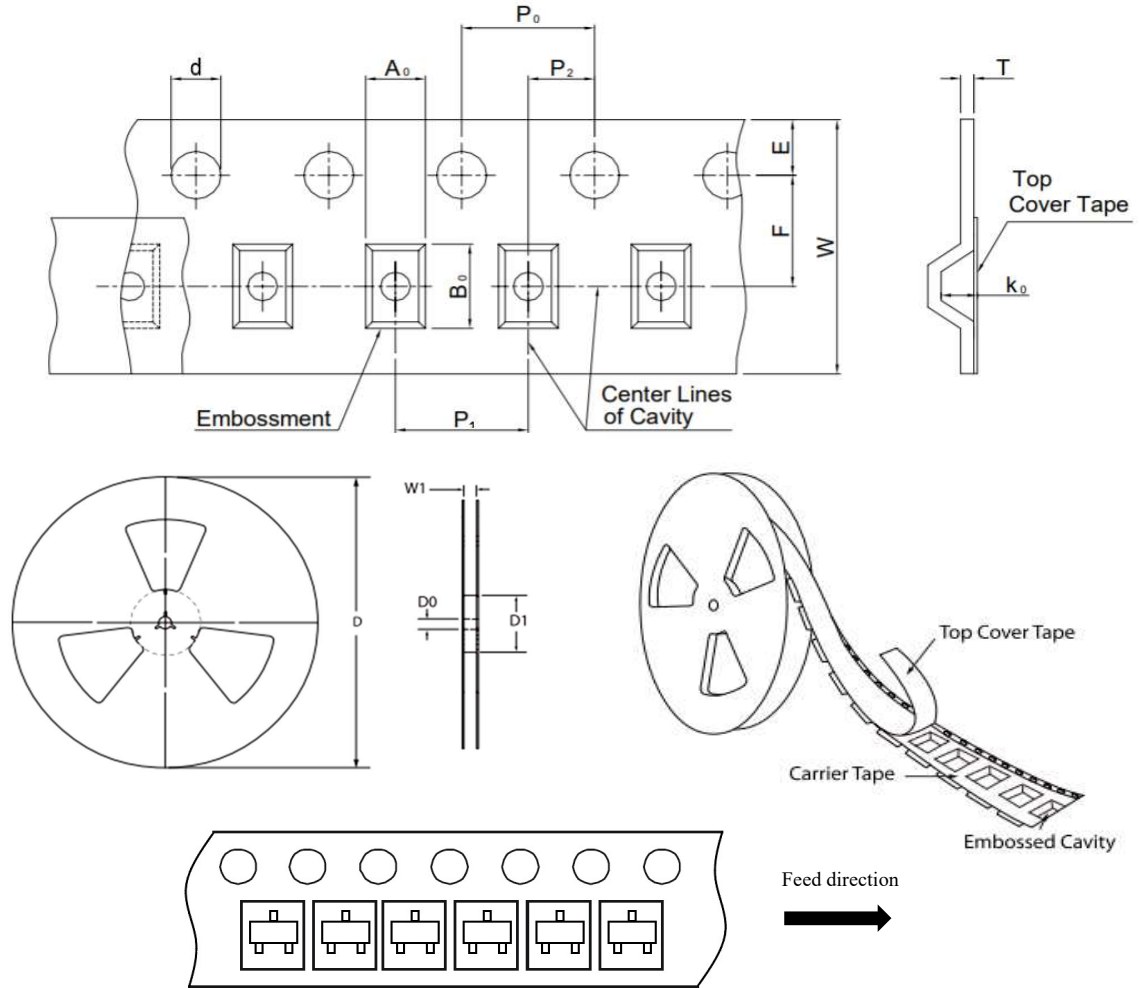

Item	Symbol	SOT-523
Carrier width	A ₀	1.95 ± 0.10
Carrier length	B ₀	1.90 ± 0.10
Carrier depth	K	1.20 ± 0.10
Sprocket hole	d	1.50 ± 0.10
Reel outside diameter	D	178.00 ± 2.00
Feed hole width	D ₀	13.00 ± 0.50
Reel inner diameter	D ₁	MIN. 50.00
Sprocket hole position	E	1.75 ± 0.10
Punch hole position	F	3.50 ± 0.10
Sprocket hole pitch	P ₀	4.00 ± 0.10
Punch hole pitch	P ₁	4.00 ± 0.10
Embossment center	P ₂	2.00 ± 0.10
Overall tape thickness	T	0.20 ± 0.05
Tape width	W	8.00 ± 0.20
Reel width	W ₁	MAX. 14.50

ORDER INFORMATION

Package	Reel Size	Quantity
SOT-523	7"	4,000

MARKING CODE


Part Number	Marking Code
SM290KWTH	ME



SM290KWTH

N-Channel Enhancement Mode Field Effect Transistor

SUGGESTED SOLDER PAD LAYOUT

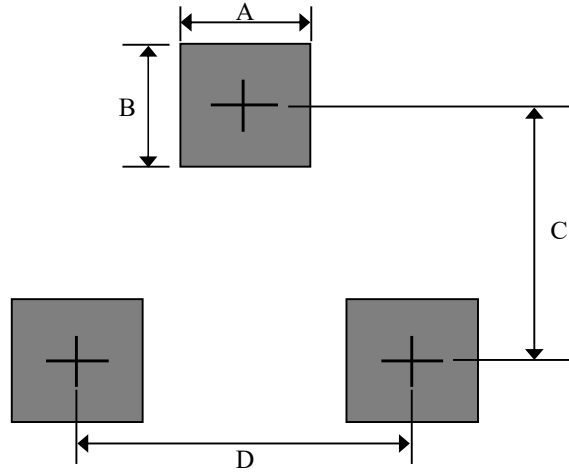

Unit : mm

PACKAGE	A	B	C	D
SOT-523	0.70	0.70	1.30	1.00