



SR520 THRU SR5200

SCHOTTKY BARRIER RECTIFIER

REVERSE VOLTAGE: 20 to 200 VOLTS

FORWARD CURRENT: 5.0 AMPERE

FEATURES

- High current capability
- High surge current capability
- Low forward voltage drop
- Exceeds environmental standards of MIL-S-19500/228
- For use in low voltage, high frequency inverters free wheeling, and porlarlity protection applications
- Suffix "H" indicates Halogen-free parts, ex. SR520H.

MECHANICAL DATA


Case : Molded plastic, DO-201AD

Epoxy : UL 94V-O rate flame retardant

Lead : Axial leads, solderable per MIL-STD-202, method 208 guaranteed

Polarity : Color band denotes cathode end

Mounting position : Any

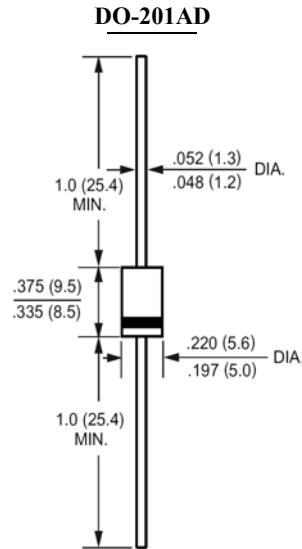

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbols	SR520	SR530	SR540	SR550	SR560	SR580	SR5100	SR5150	SR5200	Units	
Maximum Recerrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	150	200	Volts	
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	70	105	140	Volts	
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	100	150	200	Volts	
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length	$I_{(AV)}$	5.0									Amp	
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	100.0									Amp	
Maximum Forward Voltage at 5.0A DC and 25 °C	V_F	0.55			0.70		0.85		0.95		Volts	
Maximum Reverse Current at $T_A=25^{\circ}C$ at Rated DC Blocking Voltage $T_A=100^{\circ}C$	I_R					0.5						mAmp
Typical Junction Capacitance (Note 1)	C_J					380						pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$					25						°C/W
Operating and Storage Temperature Range	T_J, T_{stg}	-55 to +125				-55 to +150					°C	

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance Junction to Ambient and form junction to lead at 0.375"(9.5mm) lead length P.C.B. Mounted



SR520 THRU SR5200

SCHOTTKY BARRIER RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 FORWARD CURRENT DERATING CURVE

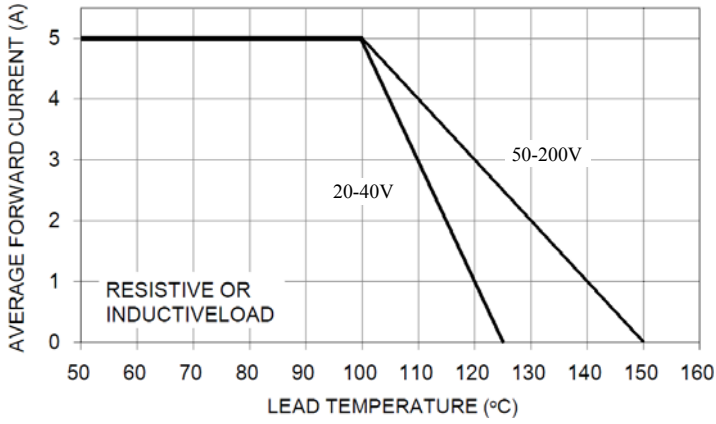


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

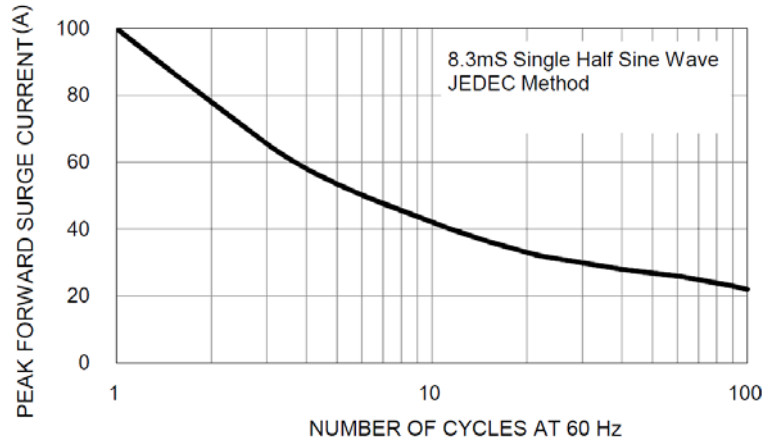


FIG. 3- TYPICAL FORWARD CHARACTERISTICS

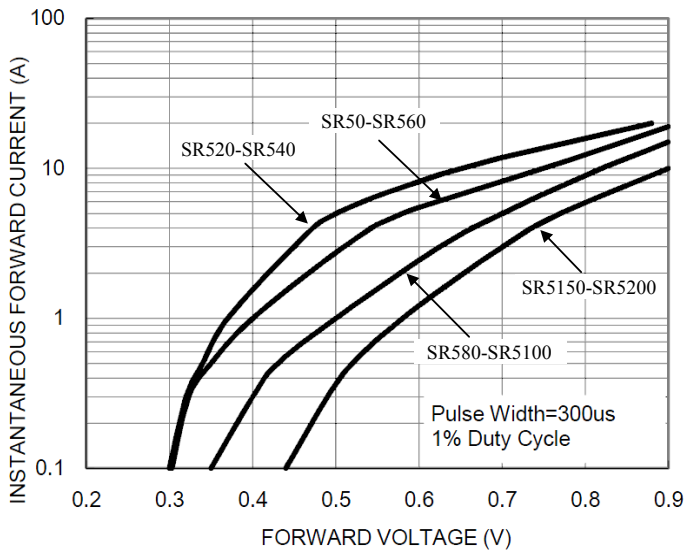


FIG. 4- TYPICAL REVERSE CHARACTERISTICS

