



SS12H THRU SS120H

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

REVERSE VOLTAGE: 20 to 200 VOLTS

FORWARD CURRENT: 1.0 AMPERE

FEATURES


- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- High current capacity
- Built-in strain relief
- Low profile package
- Metal to silicon rectifier, majority carrier conduction
- High surge capacity
- Low power loss, high efficiency
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- Suffix "H" indicates Halogen-free parts, ex. SS12H

MECHANICAL DATA

Case : Molded plastic, DO-214AC(SMA)

Terminals : Solder plated, solderable per MIL-STD-750,
method 2026 guaranteed

Polarity : Color band denotes cathode end

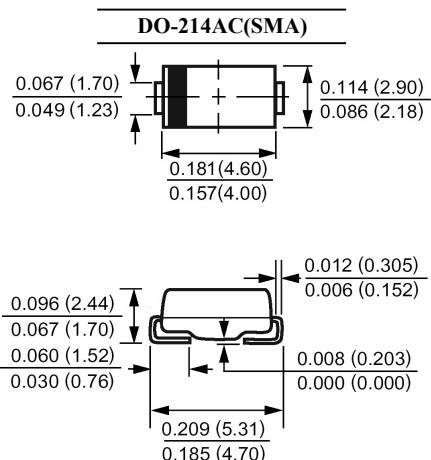

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbols	SS12H	SS13H	SS14H	SS15H	SS16H	SS18H	SS110H	SS115H	SS120H	Units				
Marking Code		SS12	SS13	SS14	SS15	SS16	SS18	SS110	SS115	SS120					
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	Volts				
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	71	105	140	Volts				
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	100	150	200	Volts				
Maximum Average Forward Rectified Current at T _L (See Fig. 1)	I _(AV)	1.0								Amp					
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	30.0								Amp					
Maximum Forward Voltage at 1.0A (Note 1)	V _F	0.55		0.70		0.85		0.95		Volts					
Maximum Reverse Current at T _A =25°C at Rated DC Blocking Voltage T _A =100°C	I _R	0.5				10				mAmp					
Typical Thermal Resistance (Note 2)	R _{0JL}	35.0								°C/W					
Operating Junction Temperature Range	T _J	-65 to +125				-65 to +150				°C					
Storage Temperature Range	T _{stg}	-65 to +150				-65 to +150				°C					

NOTES:

1- Pulse test: 300μs pulse width, 1% duty cycle

2- P.C.B. mounted with 0.2 x 0.2" (5.0 x 5.0mm) Copper Pad Areas

RATINGS AND CHARACTERISTIC CURVES

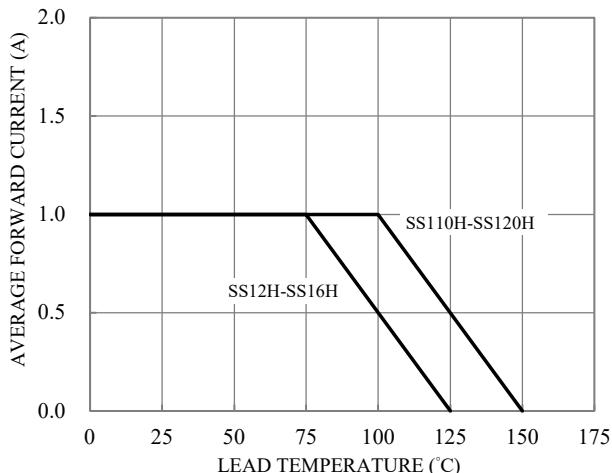


Fig.1-FORWARD CURRENT DERATING CURVE

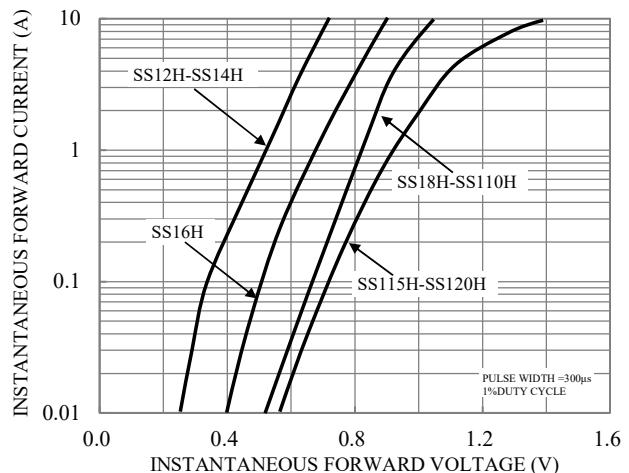


Fig.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

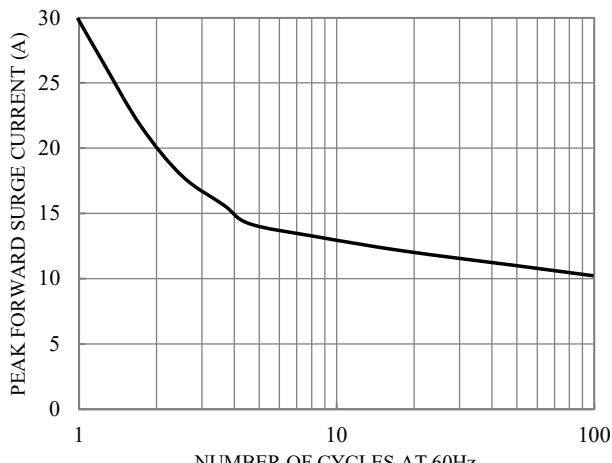


Fig.3-MAXIMUM NON-REPETITIVE SURGE CURRENT

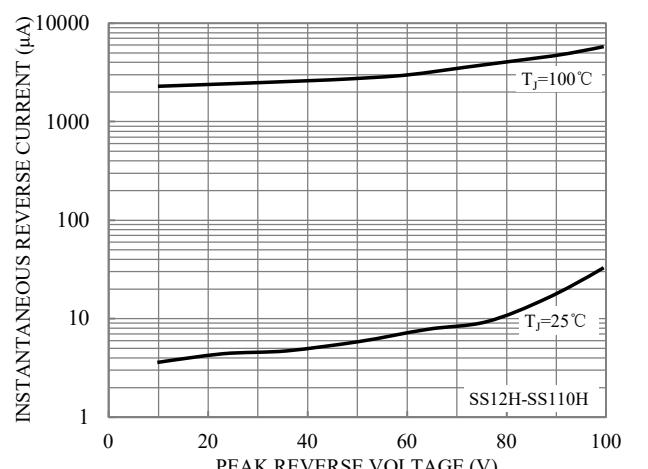


Fig.4-TYPICAL REVERSE CHARACTERISTICS

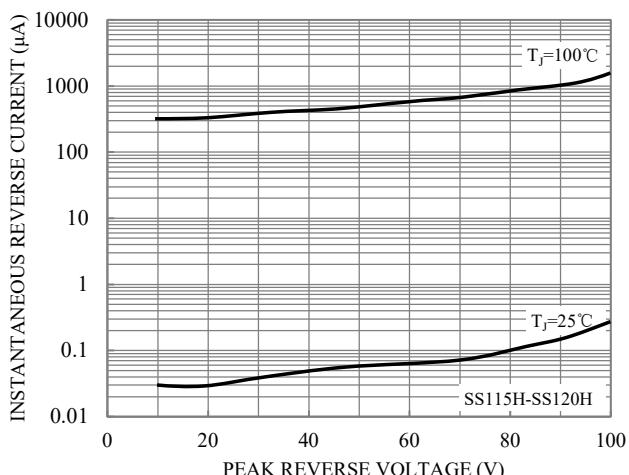


Fig.5-TYPICAL REVERSE CHARACTERISTICS