

SF21 THRU SF28

SUPERFAST RECOVERY RECTIFIER



康比電子
HORNBY ELECTRONIC

REVERSE VOLTAGE: 50 to 600 VOLTS
FORWARD CURRENT: 2.0 AMPERE

FEATURES

- High surge capability
- Low forward voltage, high current capability
- Hermetically sealed
- Superfast recovery times
- Low leakage.
- Suffix "H" indicates Halogen-free parts, ex. SF21H

MECHANICAL DATA


Case : Molded plastic, DO-15

Epoxy : UL 94V-O rate flame retardant

Lead : Axial leads, solderable per MIL-STD-202,
method 208 guaranteed

Polarity : Color band denotes cathode end

Mounting position : Any

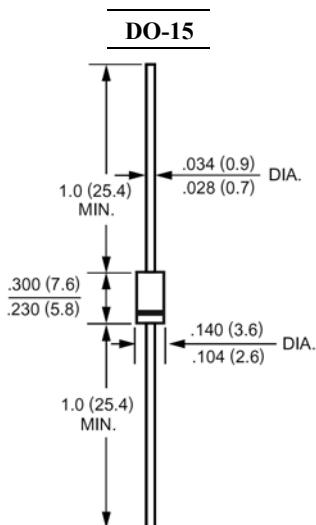

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbols	SF21	SF22	SF23	SF24	SF25	SF26	SF28	Units		
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	600	Volts		
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	420	Volts		
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	600	Volts		
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at T_A=55°C	I_(AV)	2.0							Amp		
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	50.0							Amp		
Maximum Forward Voltage at 2.0A DC and 25°C	V_F	0.95		1.3		1.7			Volts		
Maximum Reverse Current at T_A=25°C at Rated DC Blocking Voltage T_A=100°C	I_R	5.0 100							uAmp		
Typical Junction Capacitance (Note 1)	C_J	22							pF		
Typical Thermal Resistance (Note 2)	R_{θ JA}	40.0							°C/W		
Maximum Reverse Recovery Time (Note 3)	T_{RR}	35							nS		
Operating and Storage Temperature Range	T_J, T_{stg}	-65 to +150							°C		

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance Junction to Ambient and form junction to lead at 0.375"(9.5mm) lead length P.C.B. Mounted.

3- Reverse Recovery Test Conditions: I_F=.5A, I_R=1A, I_{RR}=.25A.


SF21 THRU SF28

SUPERFAST RECOVERY RECTIFIER



康比電子
HORNBY ELECTRONIC

RATINGS AND CHARACTERISTIC CURVES

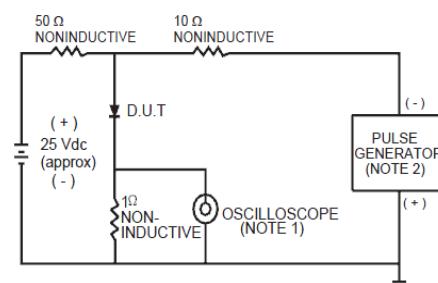

NOTES:
 1. Rise Time = 7ns max. Input Impedance = 1 megohm, 22pF.
 2. Rise Time = 10ns max. Source Impedance = 50 ohms.

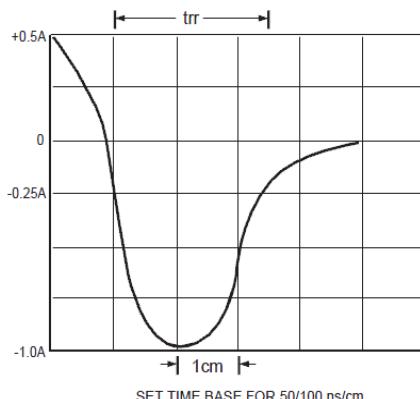


FIG.1 TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

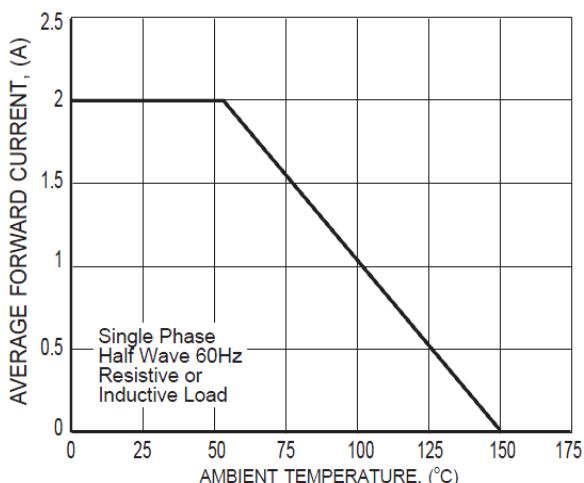


FIG.2 TYPICAL FORWARD CURRENT DERATING CURVE

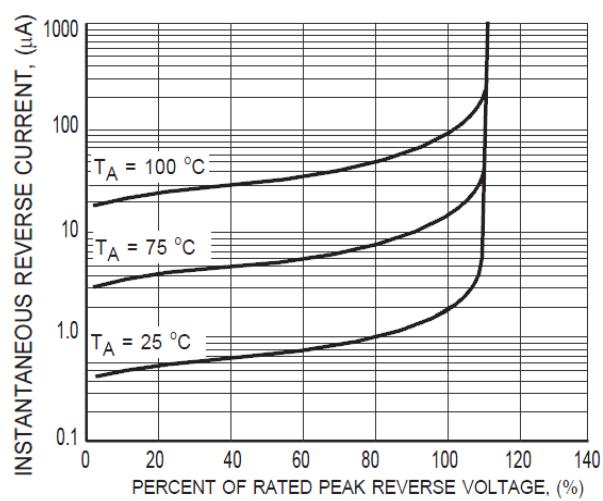


FIG.3 TYPICAL REVERSE CHARACTERISTICS

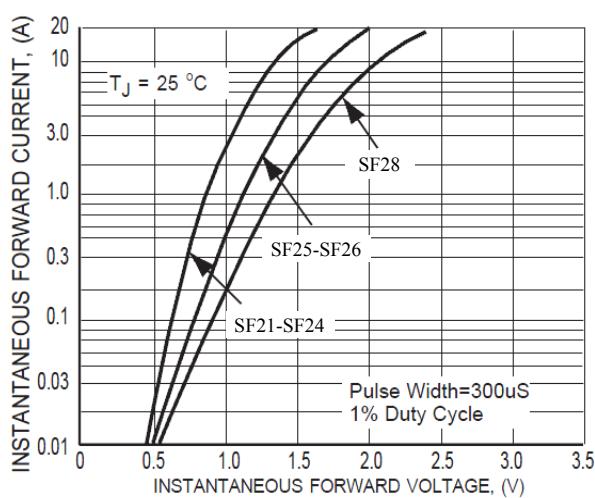


FIG.4 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

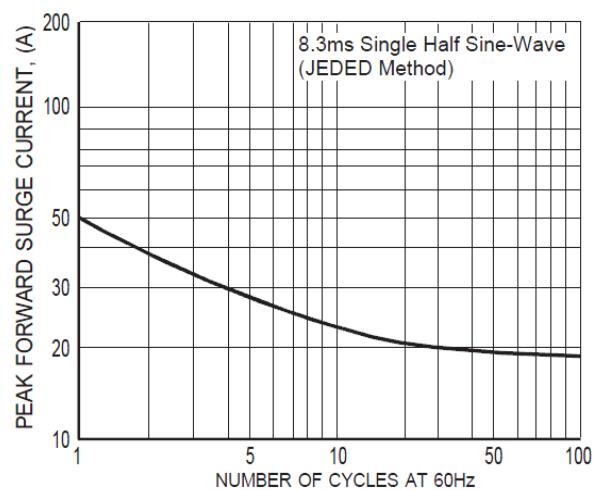


FIG.5 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT