



SE05L4BDDAH

ESD PROTECTION DIODE


FEATURES

- IEC61000-4-2(ESD) $\pm 20\text{kV}$ (air), $\pm 20\text{kV}$ (Contact)
- Bi-direction
- Suffix " H " indicated Halogen-free part, ex.SE05L4BDDAH

MECHANICAL DATA

Case : DFN1006(0402) mold package

PIN CONFIGURATION

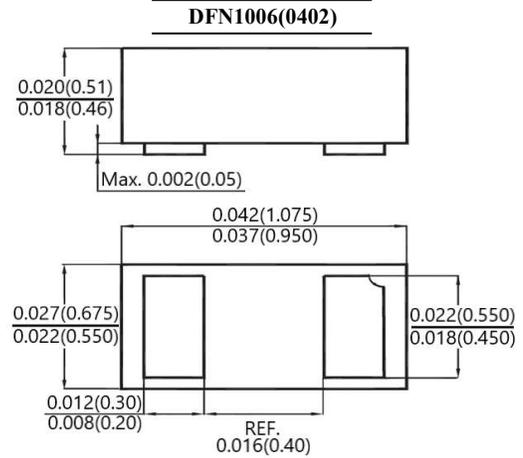

Maximum Ratings (Rating at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	Value	Units
ESD per IEC 61000-4-2 (Air)	V_{ESD}	± 20	kV
ESD per IEC 61000-4-2 (Contact)		± 20	
Operating Temperature Range	T_{STG}	-55 to +125	°C
Storage Temperature Range	T_{J}	-55 to +150	°C




SE05L4BDDAH

ESD PROTECTION DIODE


Electrical Characteristics Per line @ 25°C Unless Otherwise Specified

Parameter	Test Conditon	Symbol	Min	Typ	Max	Units
Reverse Stand-Off Voltage	-	V_{RWM}	-	-	5.3	V
Reverse Breakdown Voltage	$I_R=1mA$	V_{BR}	7	-	-	V
Reverse Leakage Current	$V_{RWM}=5.3V$	I_R	-	-	50	nA
Clamping Voltage	$I_{pp}=1A, t_p=8/20\mu s$	V_C	-	-	15	V
Junction Capacitance	$V_R=0V, f=1MHz$	C_J	-	-	0.4	pF


RATINGS AND CHARACTERISTIC CURVES

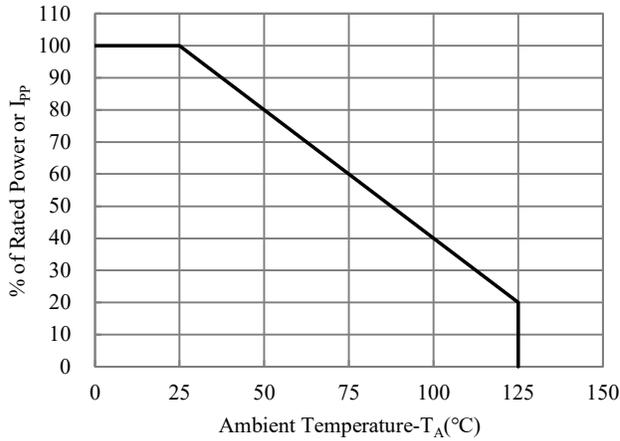


Power Derating Curve

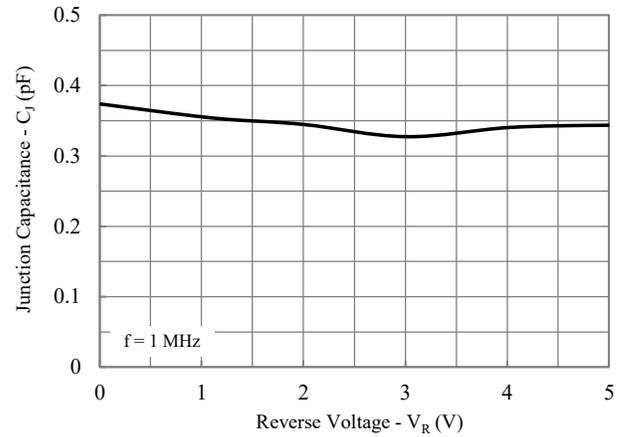

Junction Capacitance vs. Reverse Voltage

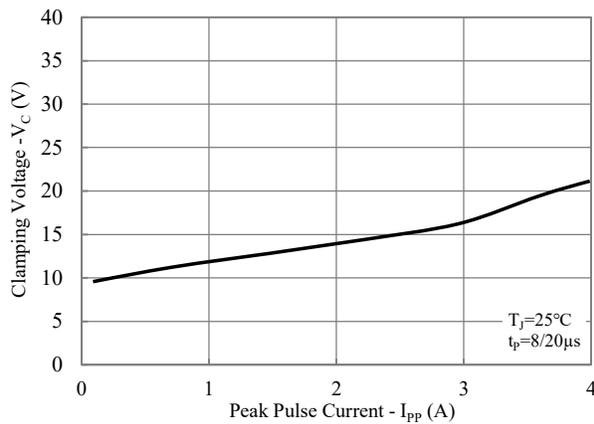

Clamping Voltage vs. Peak Pulse Current

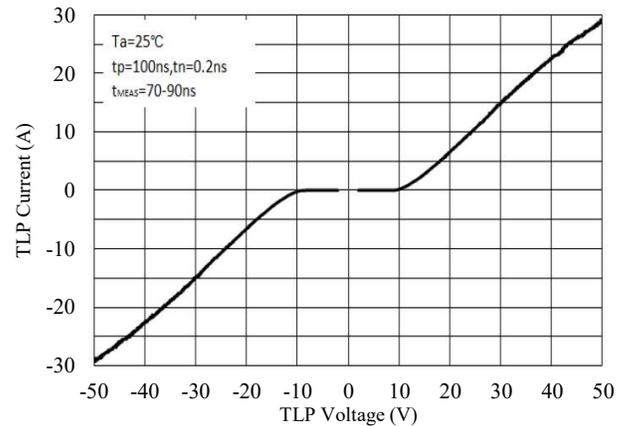


TLP Curve



SE05L4BDDAH

ESD PROTECTION DIODE

TAPE & REEL SPECIFICATION

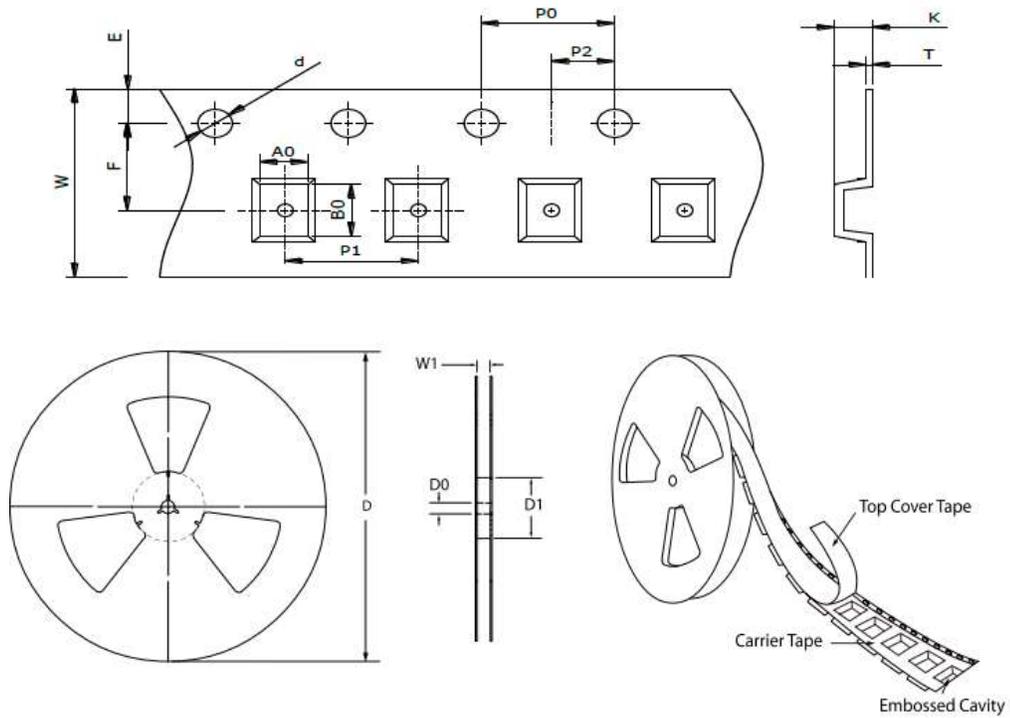

Item	Symbol	DFN1006(0402)
Carrier width	A ₀	0.70 ± 0.10
Carrier length	B ₀	1.10 ± 0.10
Carrier depth	K	0.60 ± 0.10
Sprocket hole	d	1.50 ± 0.10
Reel outside diameter	D	178.00 ± 2.00
Feed hole width	D ₀	13.00 ± 0.50
Reel inner diameter	D ₁	MIN. 54.00
Sprocket hole position	E	1.75 ± 0.10
Punch hole position	F	3.50 ± 0.10
Sprocket hole pitch	P ₀	4.00 ± 0.10
Punch hole pitch	P ₁	2.00 ± 0.10
Embossment center	P ₂	2.00 ± 0.10
Overall tape thickness	T	MAX. 0.60
Tape width	W	8.00 ± 0.30
Reel width	W ₁	8.40 ± 1.50

ORDER INFORMATION

Package	Reel Size	Quantity
DFN1006(0402)	7"	10,000

MARKING CODE


Part Number	Marking Code
SE05L4BDDAH	BD



SE05L4BDDAH

ESD PROTECTION DIODE

SUGGESTED SOLDER PAD LAYOUT

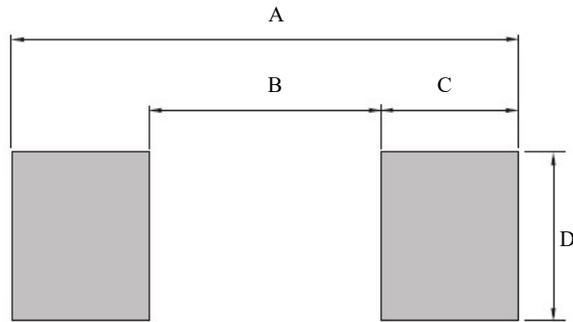

Unit:mm

Package	A	B	C	D
DFN1006(0402)	1.10	0.30	0.40	0.60